

# Proposed changes to London Luton Airport Arrivals

## SAIP AD6 Supplement:

Stansted Airport SID climb performance evidence  
supporting technical changes to altitude restrictions  
enabling the raising of CAS base levels



Photo © Graham Custance

© 2021 NATS (En-route) plc ('NERL') and London Luton Airport Operations Ltd ('LLA'), all rights reserved

NATS-LLA Public

## Roles

Action	Role	Date
Produced	Airspace Change Expert NATS Airspace and Future Operations	25/10/2021
Reviewed Approved	Airspace and Noise Performance Manager London Luton Airport	25/10/2021
Reviewed Approved	Airspace Implementation Manager NATS Airspace Development	25/10/2021

## Drafting and Publication History

Issue	Month/Year	Changes this issue
Issue 1.0	25/10/2021	Published to CAA Portal

## Contents

1.	Introduction – SAIP AD6 Controlled Airspace Southeast of Stansted.....	3
2.	Controlled Airspace Containment Circumstances.....	4
3.	Illustration and explanation of the post-ACP Stansted SID profile analysis .....	5
4.	Evidence of exceeding of climb gradients .....	6
5.	Noise, Local Air Quality, Fuel, and Greenhouse Gas Impacts .....	16
6.	Proposed Solution: SID altitude restriction amendments .....	16
7.	Engagement Summary and Additional Evidence.....	17
8.	Overall Conclusion – and what happens next .....	18
9.	ANNEX: Draft charts and coding tables (the following 12 pages) .....	19
10.	ANNEX: Engagement Emails (Redacted).....	32

## 1. Introduction – SAIP AD6 Controlled Airspace Southeast of Stansted

- 1.1 The SAIP AD6 Airspace Change Proposal (ACP) consulted on the reduction of low-altitude controlled airspace (CAS) to the southeast of Stansted, for the benefit of other airspace users known as General Aviation (GA), given that the ACP requires additional CAS albeit at much higher flight levels.
- 1.2 The release of CAS was agreed with Stansted Airport, and we confirmed that there would be no impact on aircraft flying the standard instrument departure (SID) routes through these volumes.
- 1.3 The ACP was formally submitted with the following proposed technical amendments to CAS:
  - 1.3.1 Stansted CTA3, raise CAS base by 500ft to 2500ft, to the same altitude as the southern-adjacent CAS volume known as LTMA1.
  - 1.3.2 Delete the triangular volume known as LTMA2, SE of Stansted.
  - 1.3.3 LTMA3, expand to infill the 'gap' left by the removal of LTMA2, making a single CAS base of 3500ft with no unnecessary lines on aeronautical charts.



Figure 1 Controlled Airspace (CAS) arrangements SE of Stansted: Current and Proposed

## **2. Controlled Airspace Containment Circumstances**

- 2.1 In mid/late August 2021, several weeks after the submission of the ACP and supporting documentation, we became aware that the SIDs routeing through these volumes had altitude restrictions that may not provide adequate CAS containment, under certain circumstances.
- 2.2 This potential issue would only manifest should the CAS volumes be reduced as per the ACP, and should an aircraft using the SIDs climb at the minimum rate defined on the current charts.
- 2.3 We already know that Stansted departures outclimb the existing altitude restrictions (hence the proposal to return the CAS volumes), but the purpose of this document is to transparently explain and demonstrate how Stansted departures on these SIDs climb, meet or exceed the existing altitude restrictions, identify technical solutions and compare existing climb performance with proposed solutions.
- 2.4 This will provide a solution to guarantee CAS containment under all circumstances. A CAS containment study for the Stansted SIDs was omitted from the originally submitted ACP, for which we apologise.
- 2.5 We initially conducted a radar track analysis of Stansted departures for August 2019 (one of the hottest months of the decade and Stansted's busiest month of the year) and provisionally concluded that a technical change to the SID altitude restrictions would have no material impact to Stansted departures using those SIDs.
- 2.6 We briefed the CAA on this provisional conclusion in late September 2021, and arranged a meeting to discuss the implications. Subsequently in early October the CAA requested additional evidence to support the provisional conclusion, along with additional flight-procedure compliance information.
- 2.7 This supplementary document will illustrate the circumstances, the evidence, and the proposed solutions. Due to limitations within the radar track analysis tool, we present the majority of the results numerically in this document. The radar track images for August are presented along with the numerical data, to illustrate the general situation. However, note that the radar images provided represent only c.25% of the wider data analysed (01 June to 30 September 2019, 121 days).



### 3. Illustration and explanation of the post-ACP Stansted SID profile analysis

3.1 This applies to CAS containment for the following eight Stansted SIDs as per the chart illustration:  
 CLN4S, DET1S, (Rwy 04 conventional navigation), DET1D (Rwy 04 RNP1 navigation), LAM2S (Rwy 04 positioning to Heathrow, conventional navigation)  
 CLN8R, DET1R (Rwy 22 conventional) CLN1E (Rwy 22 RNP1), LAM3R (Rwy 22 positioning to Heathrow, conventional)

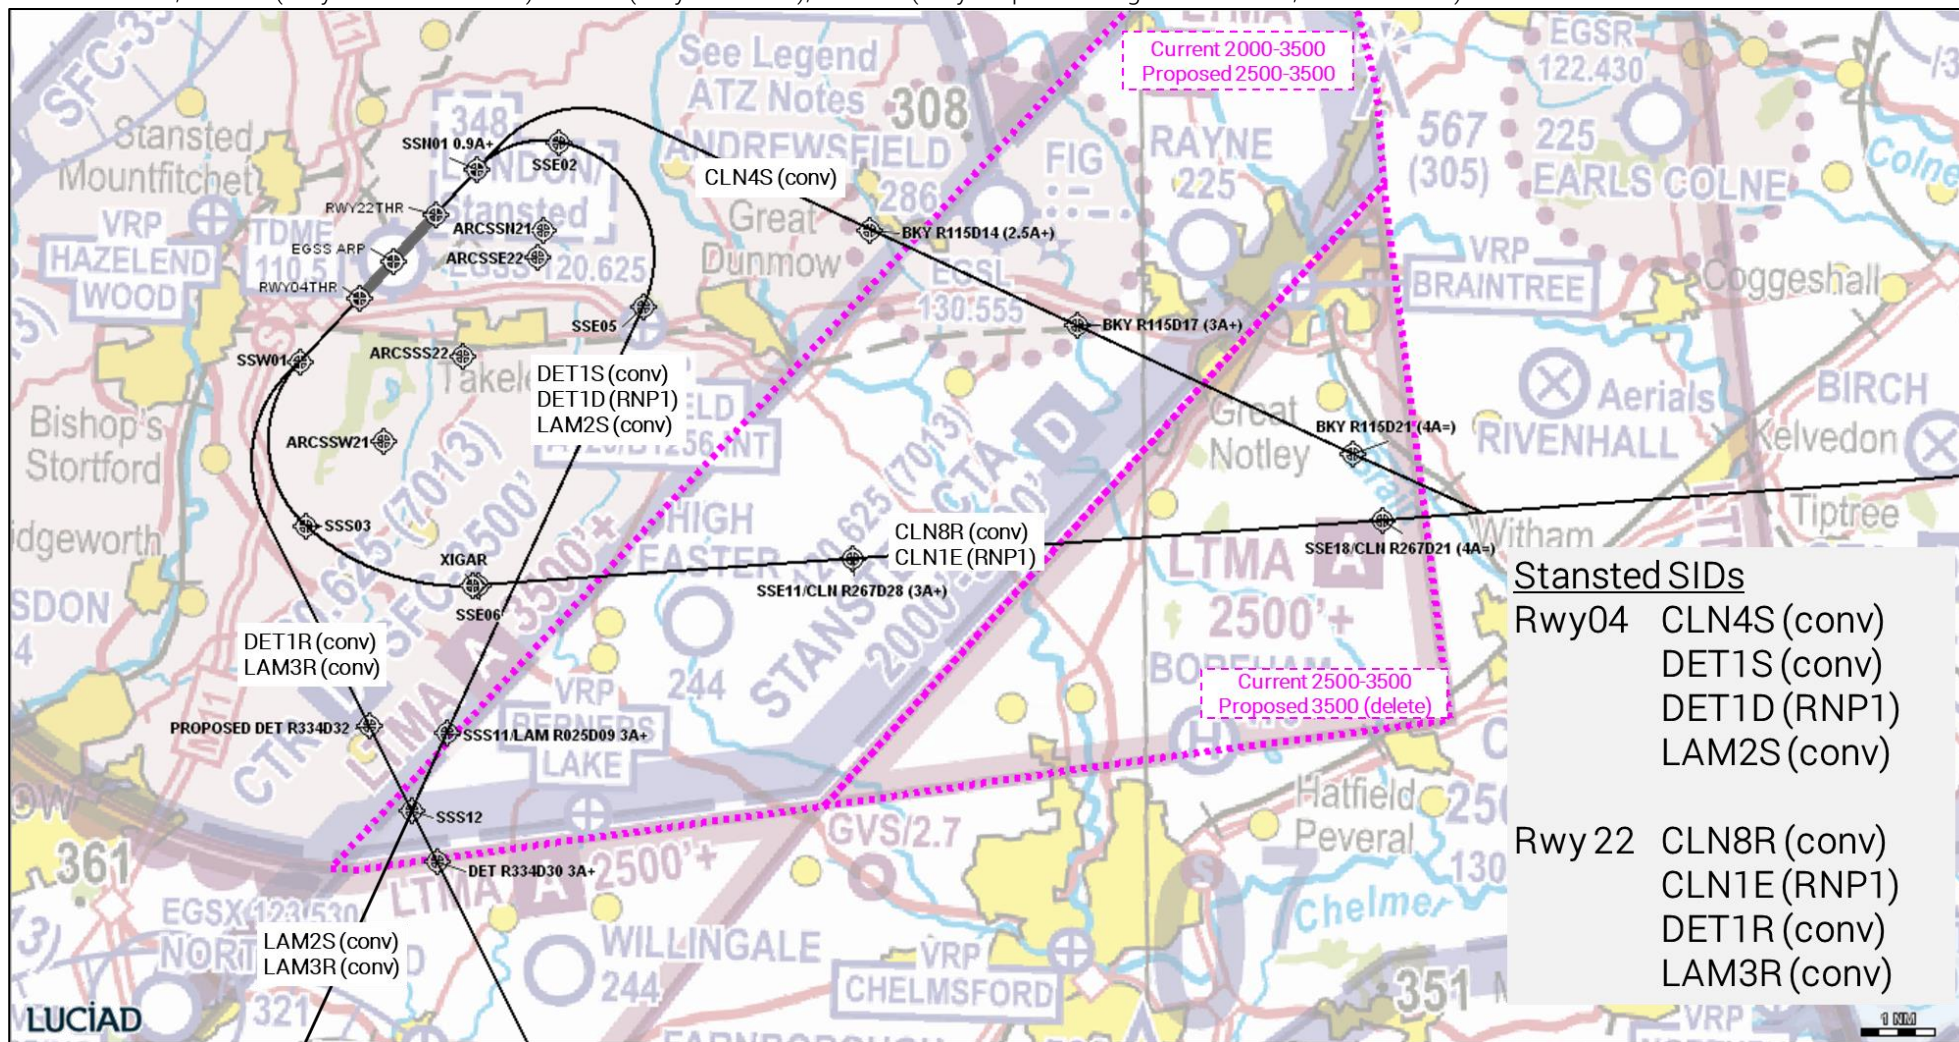


Figure 2 Stansted SID CAS containment (current, and proposed under AD6 if no action taken)



#### 4. Evidence of exceeding of climb gradients

- 4.1 The following altitude analysis is based on NATS' radar tracks of Stansted south and eastbound departures during the 121 days from 01 June-30 Sept 2019. Radar track plots are also provided for all 31 days of August 2019 as a pictorial representation of the general situation, but they do not show the complete analysis.
- 4.2 Summer 2019 was, at the time, the twelfth hottest summer in the UK since 1910, and the August bank holiday weekend temperature record was broken in south-eastern England (Heathrow, 33.2°C) ([source](#) and [source](#)). August was also Stansted Airport's busiest month for air traffic movements that summer (Jun 14,062 ATM, Jul 14,399 ATM, **Aug 14,459 ATM**, Sep 13,820 ATM) ([source](#)). Thus the data is representative of 'worst case', i.e. busiest traffic, likely heaviest load factors, lower air density causing reduced aircraft engine performance and aerodynamic surface performance.
- 4.3 CLN SIDs are far more commonly used than DET SIDs due to usage restrictions following the LAMP 1A airspace change in 2016. LAM SIDs are very rarely used; only used for positioning aircraft from Stansted to Heathrow, and they follow the same or similar initial tracks as the DET SIDs.
- 4.4 From page 8 we provide an analysis of departure flows (aircraft altitudes as they fly through the gates shown in Figure 3 below), illustrated by the blue 'whiskers' of August 2019. Where a blue track ends, it has exceeded FL70 in the images, however all flights at all altitudes are counted in the numerical analysis.

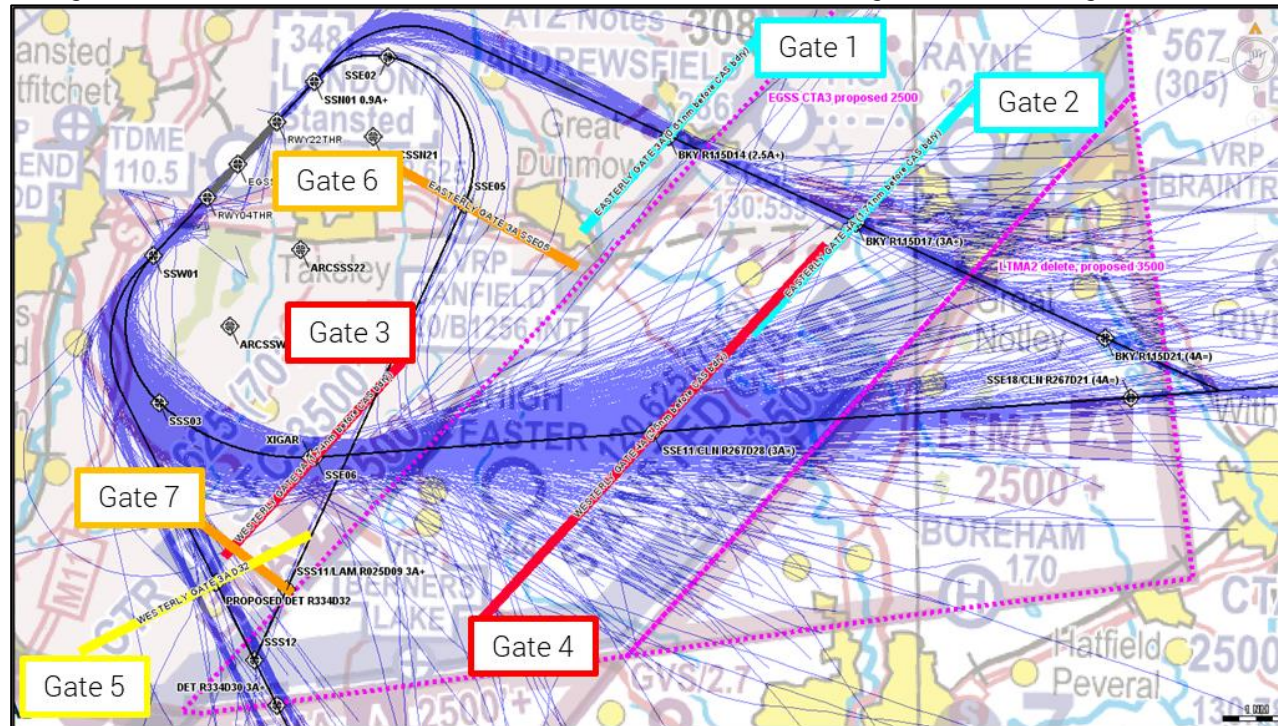


Figure 3 Analysis Gates

4.5 In Figure 4 below, we provide extracts from the UK's central repository of flight procedure data, known as the AIP. This gives the reader context for the subsequent analysis.

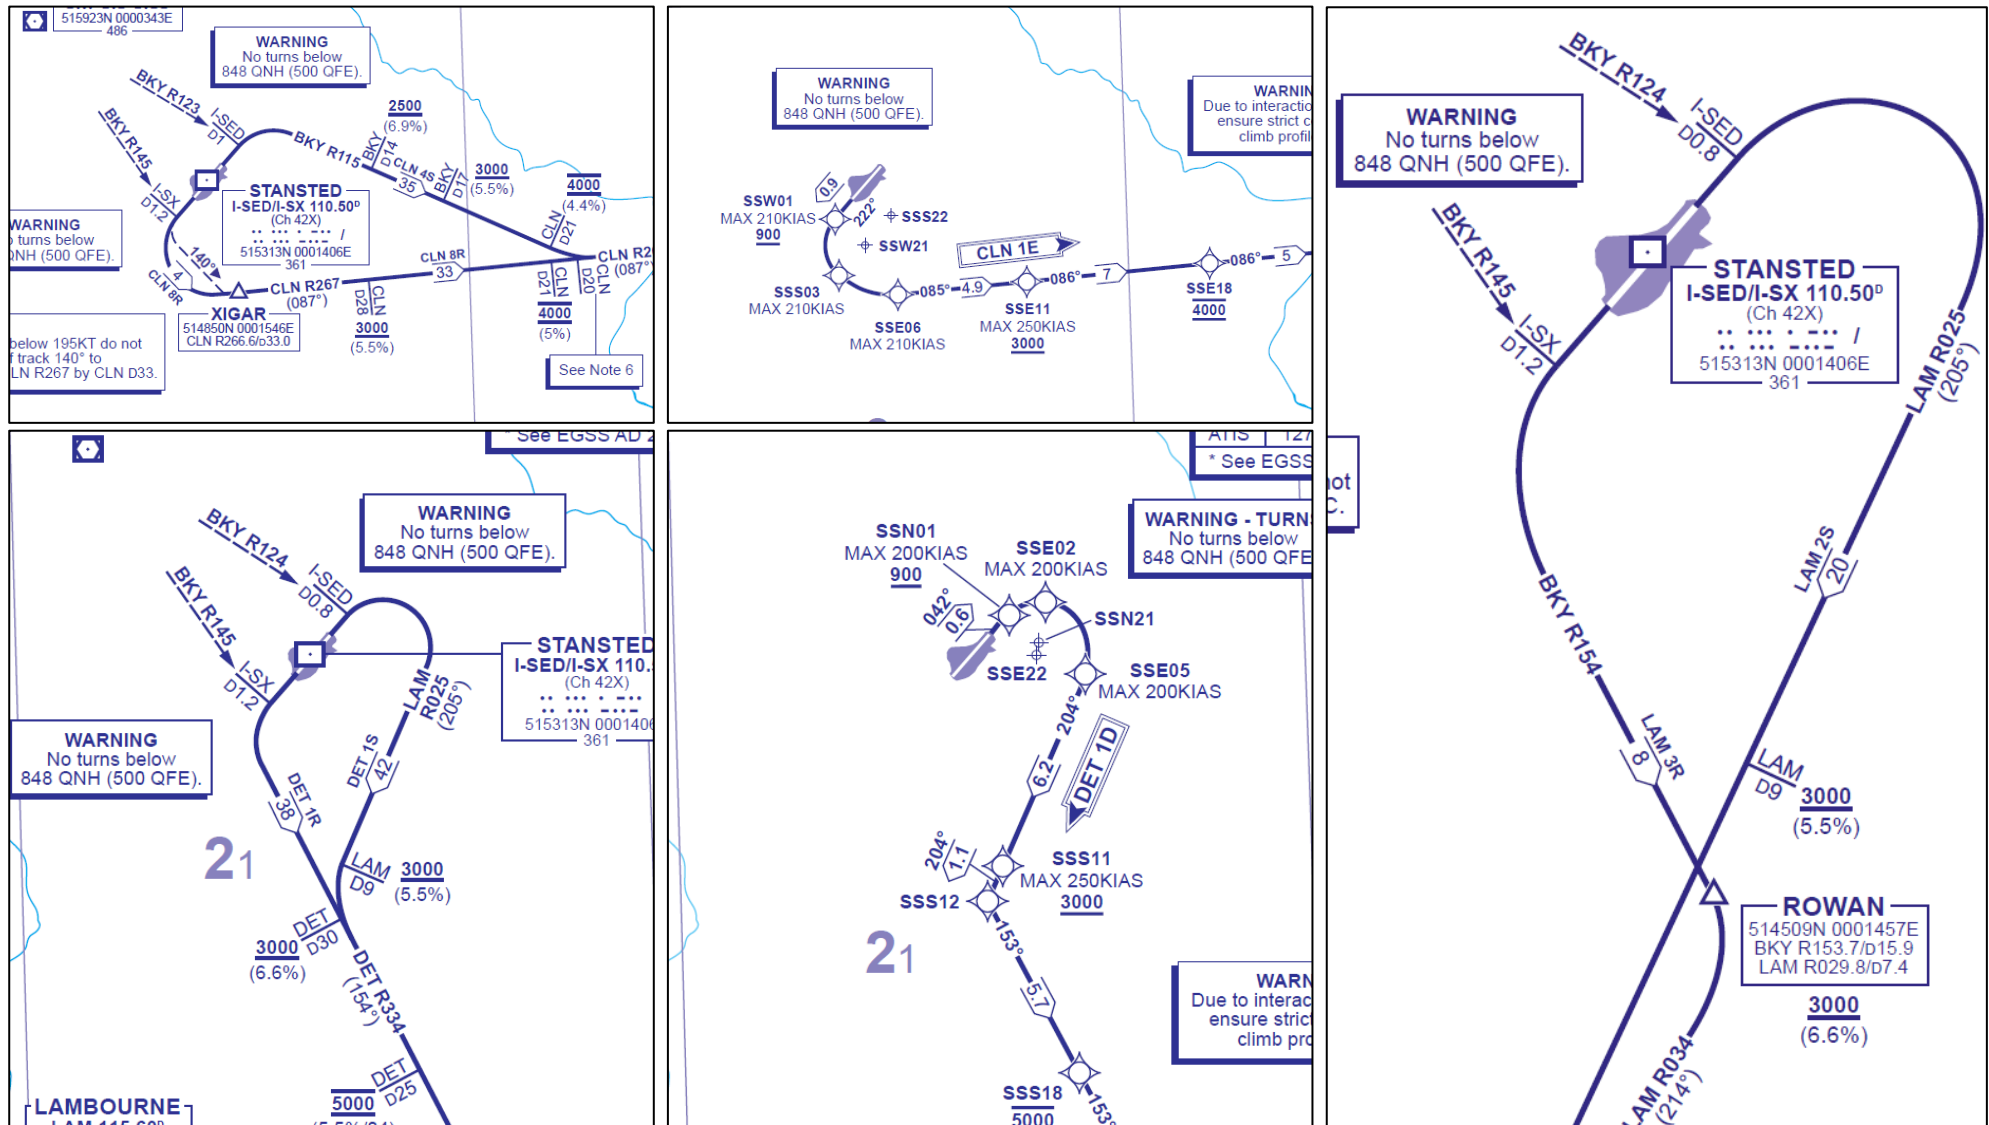


Figure 4 Stansted SIDs: extracts from AIP (AIRAC10-21) clockwise from top left: CLN4S/CLN8R, CLN1E, LAM2S/LAM3R, DET1D, DET1S/DET1R



4.6 Radar track and altitude analysis of Gate 1 and Gate 2 (Stansted SID Rwy 04 CLN4S)

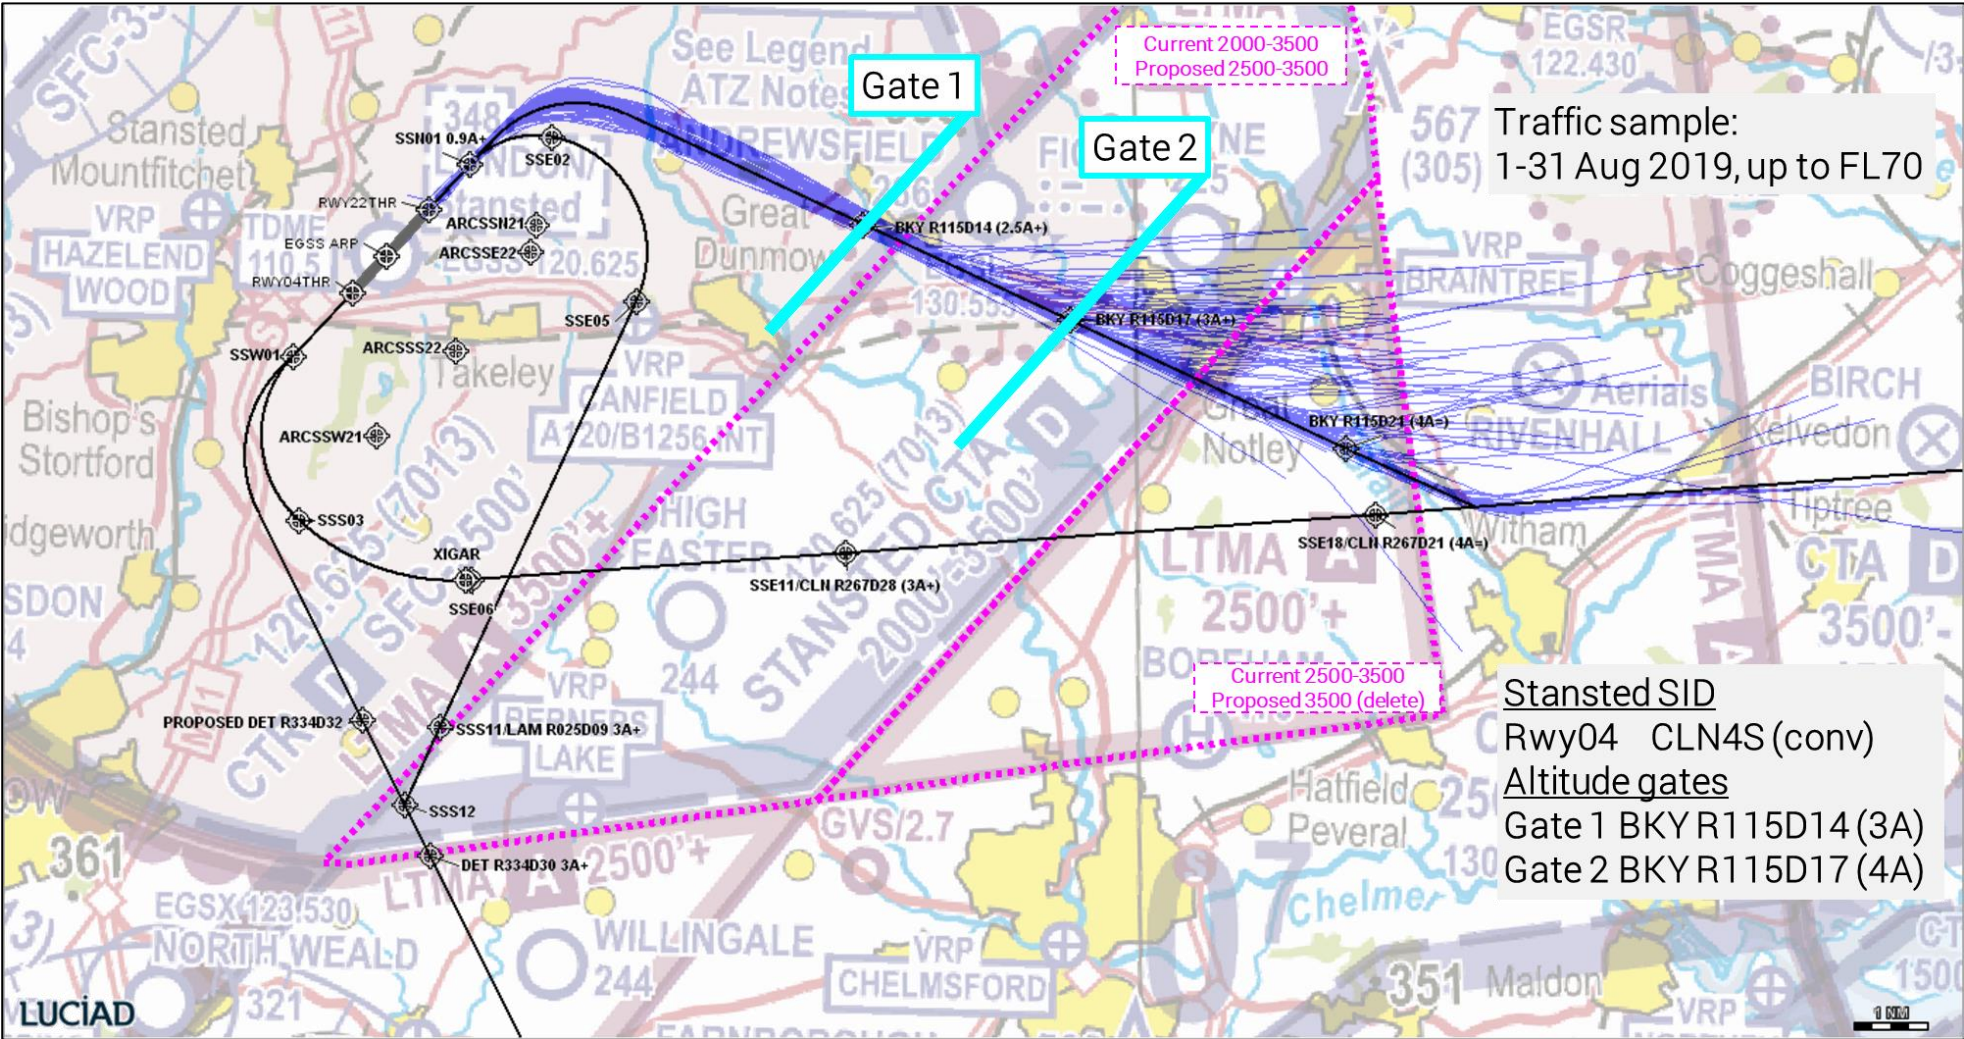


Figure 5 Stansted SID Rwy 04 CLN4S (conventional) – August 2019 illustration



**Narrative: Stansted SID Rwy 04 CLN4S (conventional) – data sample from 1 Jun-30 Sep 2019 (121 days)**

- 4.6.1 **Analysis Gate 1** was placed at BKY R115D14, designed to analyse aircraft at 3,000ft.  
One item of radar data was considered bad, indicating 0ft, and was excluded from subsequent analysis.
- 4.6.2 Of the remaining 4,803 departures, 4,801 (99.96%) met or exceeded an altitude of 3,000ft through the gate, which is 0.5nm before the next relevant CAS boundary (measured along the nominal track). Two (0.04%) were within 200ft which controllers would consider as 'achieved'<sup>1</sup>, and in this case both were actually within 100ft of Gate 1.
- 4.6.3 **Analysis Gate 2** was placed at BKY R115D17, designed to analyse aircraft at 4,000ft.  
One item of radar data was considered bad, indicating 0ft, and was excluded from subsequent analysis.
- 4.6.4 Of the remaining 5,658 departures, 5,636 (99.61%) met or exceeded an altitude of 4,000ft through the gate, which is 1.8nm before the next relevant CAS boundary (measured along the nominal track). Twenty (0.35%) were within 200ft which controllers would consider as 'achieved', and in this case 17 were actually within 100ft of Gate 2.
- 4.6.5 Of the remaining two flights through Gate 2:
- An A320 to Vienna achieving 3,500ft was compared with another A320 to Paphos on the same day, with Paphos 1,000nm further away from Stansted than Vienna (needing several tonnes of aviation fuel more than a flight to Vienna). The Paphos flight achieved 4,900ft.
  - An A20N to Istanbul achieving 3,600ft was compared with another A20N of the same operator, to the same destination on the same day. The latter flight achieved 5,000ft.

**Conclusion: Stansted SID Rwy 04 CLN4S (conventional)**

- 4.6.6 Two flights in 121 days (0.04%) did not quite meet or exceed the Gate 2 analysis altitudes, given that a controller considers an altitude indication of within 200ft or less as 'achieved'.
- 4.6.7 Of those 2 flights, the Gate 2 analysis altitudes were met or exceeded by similar flights.
- 4.6.8 CAS containment assurance would be established, should climb restrictions be placed at the same locations as these gates.

---

<sup>1</sup> In accordance with Section 1 Chapter 6 Para 10C.1 on page 126 of CAP493 MATS Part 1 Edn 9 Corrig (May 2021)

4.7 Radar track and altitude analysis of Stansted SID Rwy 22 CLN8R (conventional) and CLN1E (RNP1)

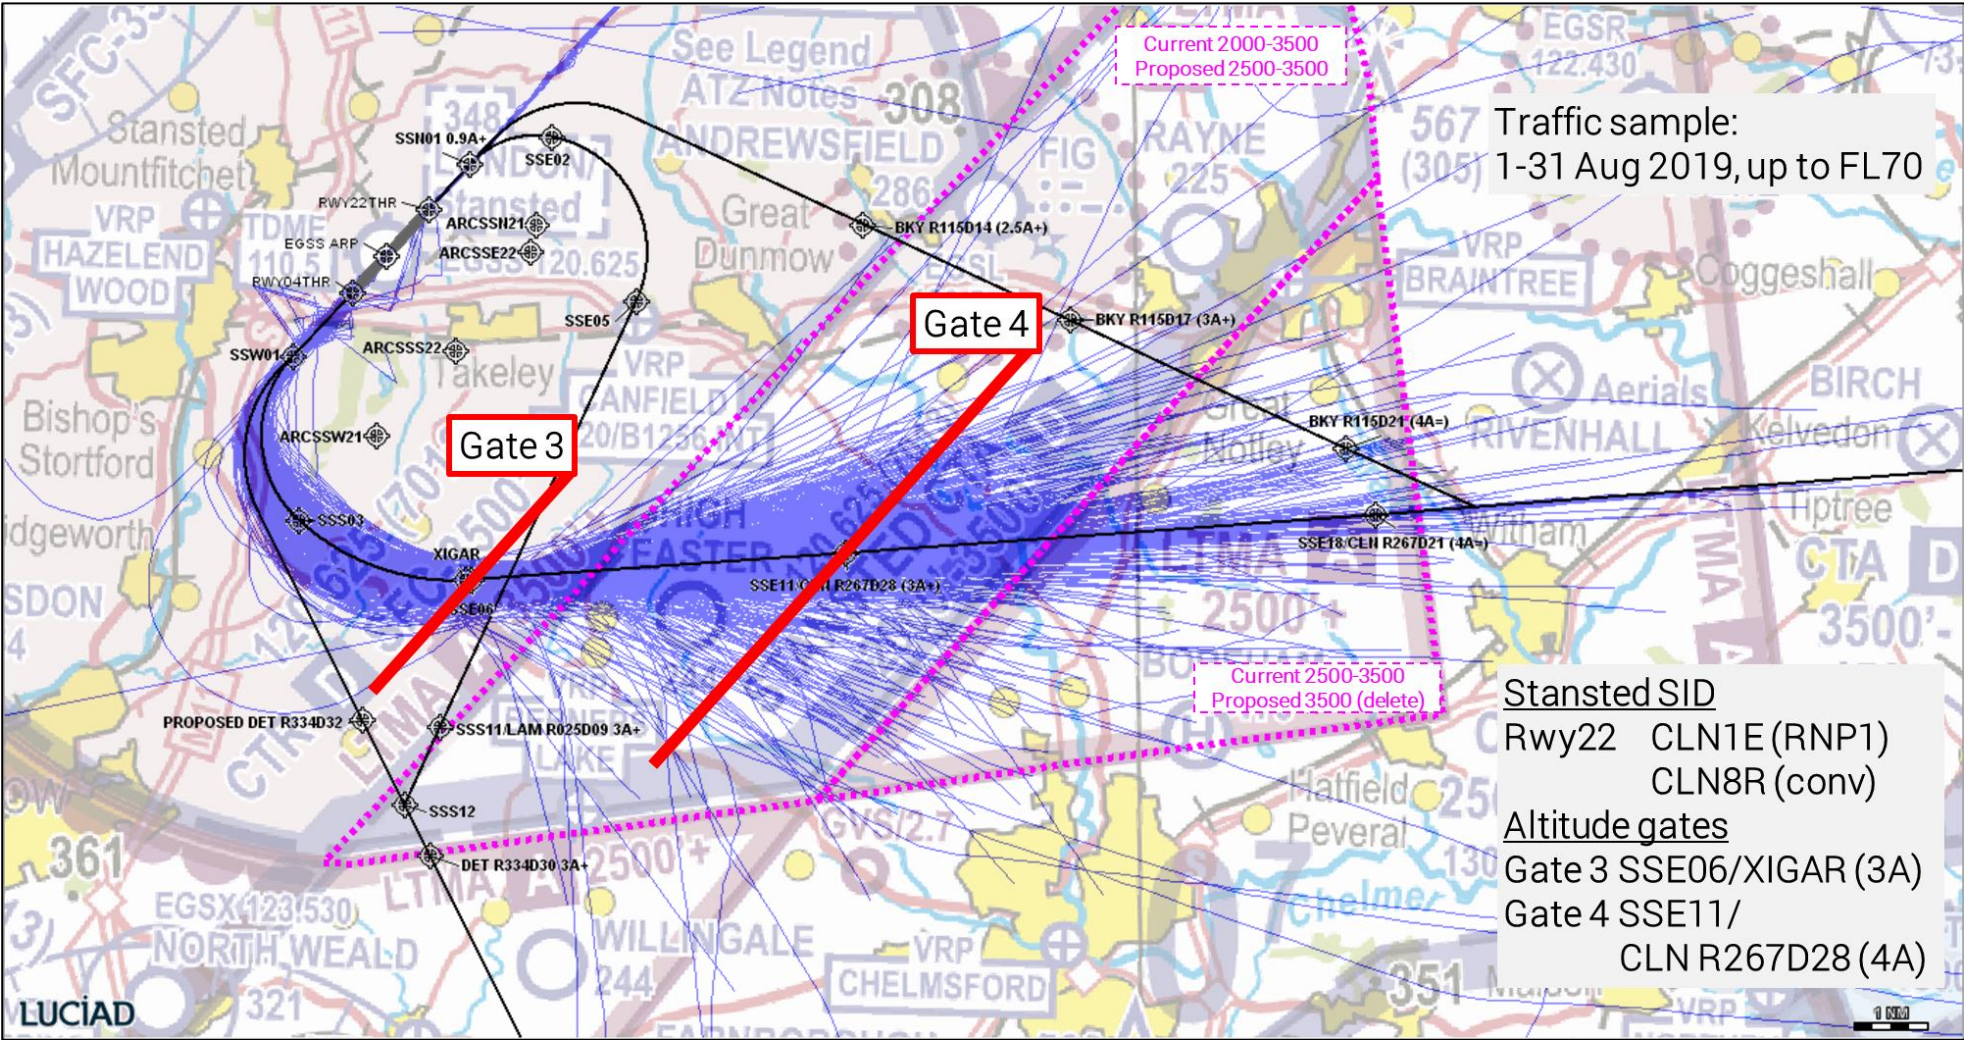


Figure 6 Stansted SID Rwy 22 CLN8R (conventional) and CLN1E (RNP1) – August 2019 illustration



**Narrative: Stansted SID Rwy 22 CLN8R (conventional) and CLN1E (RNP1) – data sample from 1 Jun-30 Sep 2019 (121 days)**

- 4.7.1 **Analysis Gate 3** was placed at SSE06/XIGAR, designed to analyse aircraft at 3000ft.  
Three items of radar data were considered bad, one indicating 0ft, two were flights unintentionally captured by the gate but were not using the SIDs of interest, and all three were excluded from subsequent analysis.
- 4.7.2 Of the remaining 13,770 departures, 13,733 (99.73%) met or exceeded an altitude of 3,000ft through the gate, which is 1.6nm before the next relevant CAS boundary (measured along the nominal track). Thirty one (0.23%) were within 200ft which controllers would consider as 'achieved', and in this case 25 were actually within 100ft of Gate 3.
- 4.7.3 Six flights (0.04%) met or exceeded 2,700ft through the gate. Each of the 6 were identified and compared with similar flights.
- An A320 to Larnaca achieving 2,700ft was compared with another A320 to Antalya, a similar distance. The Antalya flight achieved 3,500ft.
  - An A321 to Paphos achieving 2,700ft was compared with another A321 to Antalya, a similar distance. The Antalya flight achieved 3,500ft.
  - A B738 to Rhodes achieving 2,700ft was compared with another B738 to Bodrum, a similar distance. The Bodrum flight achieved 3,100ft.
  - An A321 to Rhodes achieving 2,700ft was compared with another A321 to Dalaman, a similar distance. The Dalaman flight achieved 3,200ft.
  - A B738 to Dalaman achieving 2,700ft was compared with another B738 to the same destination. The latter flight achieved 4,100ft.
  - For one flight achieving 2,700ft there was no comparable flight on the same day – a B748 cargo aircraft to Luxembourg. However, the same operator's flight using the same aircraft to the same destination achieved 3,300ft, 3,800ft and 2,900ft in the three preceding flights, and then achieved 3,700ft, 3,200ft and 3,900ft in the three subsequent flights.
- 4.7.4 **Analysis Gate 4** was placed at SSE11/CLN R267D28, designed to analyse aircraft at 4,000ft.  
One item of radar data was considered bad, indicating 0ft, and was excluded from subsequent analysis.
- 4.7.5 Of the remaining 13,668 departures, 13,627 (99.7%) met or exceeded an altitude of 4,000ft through the gate, which is 2.8nm before the next relevant CAS boundary (measured along the nominal track). Forty one (0.3%) were within 200ft which controllers would consider as 'achieved', and in this case 40 were actually within 100ft of Gate 4.

**Conclusion: Stansted SID Rwy 22 CLN8R (conventional) and CLN1E (RNP1)**

- 4.7.6 Six flights in 121 days (0.04%) did not quite meet or exceed the Gate 3 analysis altitudes, given that a controller considers an altitude indication of within 200ft or less as 'achieved'.
- 4.7.7 Of those 6 flights, the Gate 3 analysis altitudes were met or exceeded by similar flights.
- 4.7.8 CAS containment assurance would be established, should climb restrictions be placed at the same locations as these gates.

4.8 Radar track and altitude analysis of Stansted SID Rwy 22 DET1R and LAM3R (conventional).

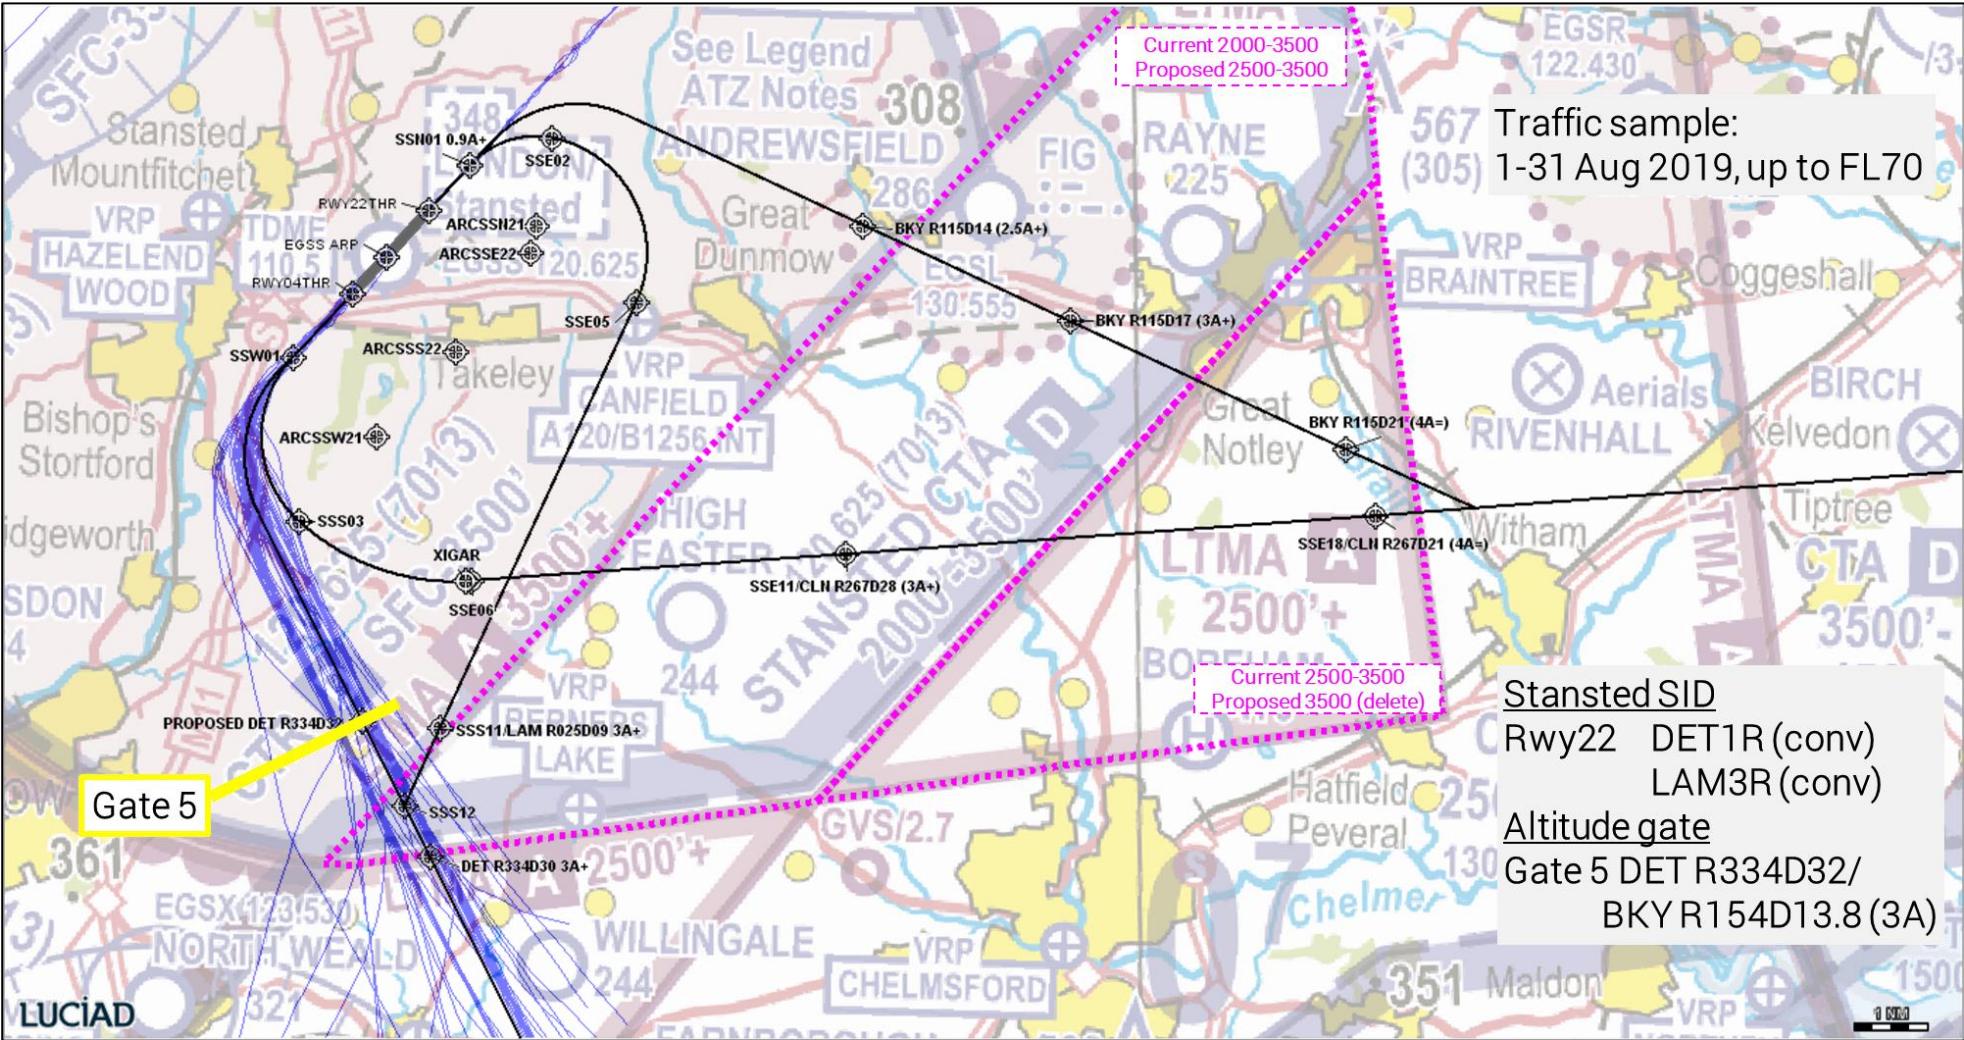


Figure 7 Stansted SID Rwy 22 DET1R and LAM3R (conventional) – August 2019 illustration



**Narrative: Stansted SID Rwy 22 DET1R and LAM3R (conventional) – data sample from 1 Jun-30 Sep 2019 (121 days)**

The DET SIDs are less frequently used, following the LAMP1A ACP from 2016 which transferred the majority of traffic to the CLN SIDs (analysed earlier), and the LAM SIDs are for positioning aircraft to Heathrow. Both would follow a similar track through Gate 5.

4.8.1 **Analysis Gate 5** was placed at DET R334D32/BKY R154D13.8, designed to analyse aircraft at 3,000ft.

4.8.2 There were 556 departures, all but one of which met or exceeded an altitude of 3,000ft through the gate, which is 1.0nm before the relevant CAS boundary (measured along the nominal track).

4.8.3 The remaining flight was actually within 100ft of Gate 5 and is considered to have 'achieved' the gate.

**Conclusion: Stansted SID Rwy 22 DET1R and LAM3R (conventional)**

4.8.4 All flights using these SIDs in 121 days met or exceeded the Gate 5 analysis altitudes, given that a controller considers an altitude indication of within 200ft or less as 'achieved'.

4.8.5 CAS containment assurance would be established, should climb restrictions be placed at the same location as this gate.

4.9 Radar track and altitude analysis of Stansted SID Rwy 04 DET1S LAM 2S (conventional) and DET1D (RNP1).

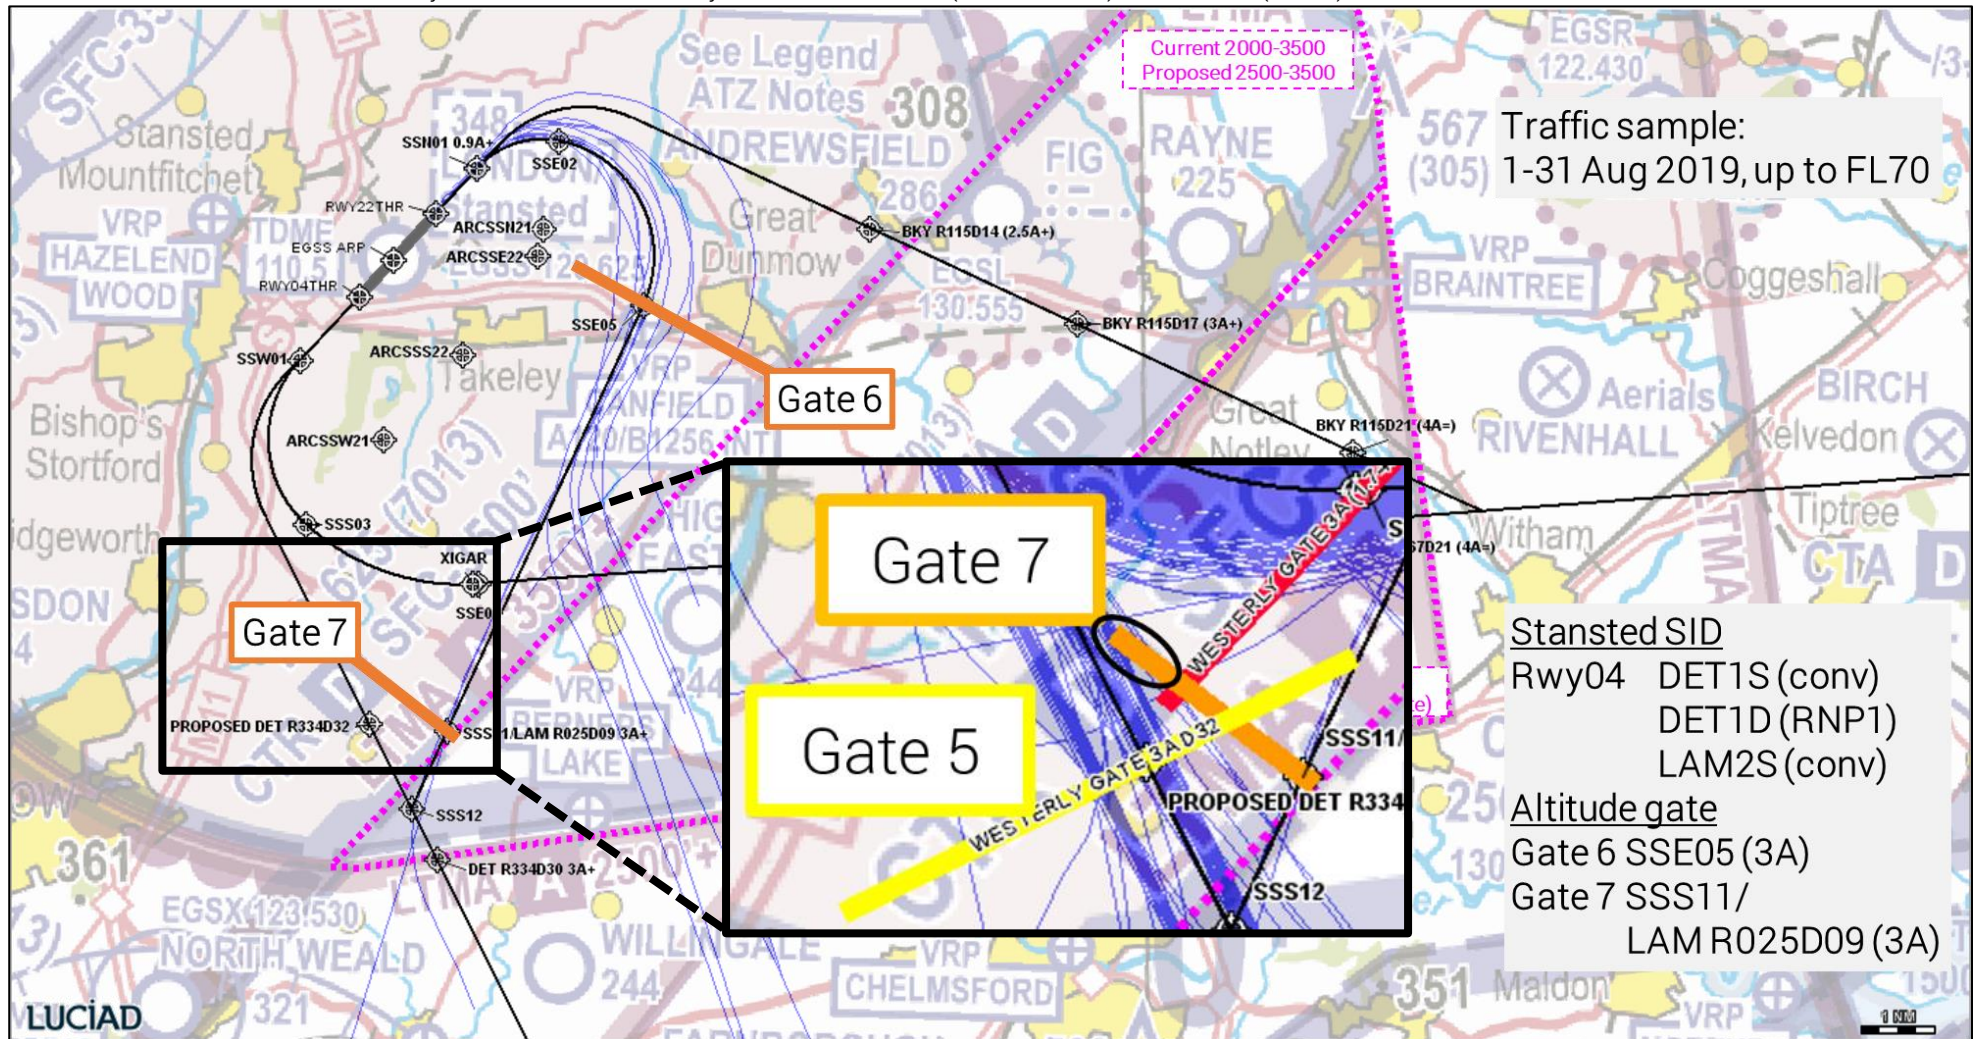


Figure 8 Stansted SID Rwy 04 DET1S LAM 2S (conventional) and DET1D (RNP1) – August 2019 illustration, with Gate 5 and Gate 7 crossover highlighted



**Narrative: Stansted SID Rwy 04 DET1S LAM 2S (conventional) and DET1D (RNP1) – data sample from 1 Jun-30 Sep 2019 (121 days)**

The DET SIDs are less frequently used, following the LAMP1A ACP from 2016 which transferred the majority of traffic to the CLN SIDs (analysed earlier), and the LAM SIDs are only for positioning flights. Both would follow a similar track through Gate 6, with the LAM2S always continuing through Gate 7 towards LAM.

In the August illustration above, note that several DET-bound aircraft appear to have been turned directly to DET while still abeam the runway, thus avoiding Gate 7. A turn such as this is only allowable once the aircraft has attained an altitude of 4,000ft in accordance with EGSS-AD-2.21 Noise Abatement Procedures, assuring CAS containment for the areas of interest. This is a common controlling technique which complies with the Noise Abatement procedures and shortens the track to DET.

- 4.9.1 **Analysis Gate 6** was placed at SSE05, designed to analyse aircraft at 3,000ft.  
One item of radar data was considered bad, indicating 0ft, and was excluded from subsequent analysis.
- 4.9.2 Of the remaining 206 departures, all met or exceeded an altitude of 3,000ft through the gate, with 193 (93.6%) achieving or exceeding 3,500ft.
- 4.9.3 **Analysis Gate 7** was placed at SSS11/LAM R025D09, designed to analyse aircraft at 3,500ft that departed Rwy 04 via these SIDs.
- 4.9.4 Gate 7 'crosses' the Rwy 22 DET/LAM track, as per Gate 5 described previously. This means that several Rwy 22 flights are unintentionally captured by this gate, and more flights are counted through Gate 7 than Gate 6 which is counter-intuitive. This is highlighted in Figure 8 above. We inferred that those with a snapshot heading of between 150°-170° belong in Gate 5 for the Rwy 22 departures previously analysed, and can be removed from Gate 7 where the heading would be c.200-220°.
- 4.9.5 There were 535 flights counted by this Gate, including those unintentionally captured.
- 4.9.6 Logically, all those meeting or exceeding 3,500ft have achieved the analysis altitude, regardless of whether they 'belong' in previous Gate 5 or this Gate 7.
- 4.9.7 One flight achieved 3200ft, three achieved 3,300ft, and one achieved 3,400ft. However, studying the heading of these flights, all five were tracking between 150°-170°, thus they 'belong' in Gate 5 and not in Gate 7 and can be excluded from this Gate 7 analysis.
- 4.9.8 530 flights met or exceeded an altitude of 3,500ft through the gate, regardless of whether they were eligible for Gate 5 or Gate 7.

**Conclusion: Stansted SID Rwy 04 DET1S LAM 2S (conventional) and DET1D (RNP1)**

- 4.9.9 Gate 6 was set to understand how high aircraft typically achieve at the end of their first turn, and was not intended to set a new climb restriction.
- 4.9.10 Flights not meeting 3,500ft through Gate 7 were relevant to this analysis. Those 5 were all identified, their headings analysed, and all 5 'belong' to Gate 5.
- 4.9.11 Flights through Gate 5 that were unintentionally captured by Gate 7 remained included and their headings were not analysed. As long as any flight met or exceeded the analysis altitude, no further study was necessary because its purpose was to identify all flights that underperformed the altitude parameter of 3,500ft.
- 4.9.12 All eligible flights in 121 days met or exceeded the analysis altitudes of both gates.
- 4.9.13 CAS containment assurance would be retained, should a climb restriction be placed at the same location as Gate 7.

## 5. Noise, Local Air Quality, Fuel, and Greenhouse Gas Impacts

- 5.1 There would be no need to increase engine power settings to meet the proposed altitude restrictions. The changes are technical in nature and would not change noise, local air quality, fuel, or greenhouse gas (CO<sub>2</sub>) impacts.
- 5.2 Paragraphs 4.6 (p.8) to 4.9 (p.14) show that 99.8% of flights in the 121 day sample (all but 8 out of 39,825 flights) were within 200ft of the proposed altitude restrictions. The remaining 8 slightly underperformed by only a few hundred feet. We have also demonstrated that 8 closely-equivalent flights to those underperformers either met or exceeded the proposed altitude restrictions, thus those 8 can be considered anomalies.

## 6. Proposed Solution: SID altitude restriction amendments

We propose to amend the vertical definitions, but not the lateral definitions, of the following 8 SIDs:

- 6.1 Rwy 04 CLN4S (conventional)
  - 6.1.1 Change altitude restriction at BKY R115D14 from 2500ft to 3000ft.
  - 6.1.2 Change altitude restriction at BKY R115D17 from 3000ft to 4000ft.
  - 6.1.3 Up-issue the SID chart to CLN5S (see Figure 10 on p.21).
  - 6.1.4 As per the evidence supplied in paragraph 4.6 from p.8, aircraft already meet or exceed these proposed restrictions.
- 6.2 Rwy 22 CLN8R (conventional)
  - 6.2.1 Add an altitude restriction at XIGAR 3000ft.
  - 6.2.2 Change altitude restriction at CLN R267D28 from 3000ft to 4000ft.
  - 6.2.3 Up-issue the SID chart to CLN9R (see Figure 10 on p.21).
  - 6.2.4 As per the evidence supplied in paragraph 4.7 from p.10, aircraft already meet or exceed these proposed restrictions.
- 6.3 Rwy 22 CLN1E (RNP1)
  - 6.3.1 Add an altitude restriction at SSE06 3000ft
  - 6.3.2 Change altitude restriction at SSE11 from 3000ft to 4000ft
  - 6.3.3 Up-issue the SID chart and coding table to CLN2E (Figure 12 on p.23 and Figure 19 on p.30).
  - 6.3.4 As per the evidence supplied in paragraph 4.7 from p.10, aircraft already meet or exceed these proposed restrictions.
- 6.4 Rwy 04 DET1S (conventional)
  - 6.4.1 Change altitude restriction at LAM R025D09 from 3000ft to 3500ft.
  - 6.4.2 Up-issue the SID chart to DET2S (Figure 14 on p.25).
  - 6.4.3 As per the evidence supplied in paragraph 4.9 from p.14, aircraft already meet or exceed this proposed restriction.
- 6.5 Rwy 04 DET1D (RNP1)
  - 6.5.1 Change altitude restriction at SSS11 from 3000ft to 3500ft
  - 6.5.2 Up-issue the SID chart and coding table to DET2D (Figure 16 on p.27 and Figure 20 on p.31).
  - 6.5.3 As per the evidence supplied in paragraph Figure 7 from p.12, aircraft already meet or exceed this proposed restriction.
- 6.6 Rwy 22 DET1R (conventional)
  - 6.6.1 Add an altitude restriction at DET R334D32 3000ft.
  - 6.6.2 Delete the altitude restriction at DET R334D30 3000ft



- 6.6.3 This has the effect of moving the 3000ft restriction 2nm closer to the runway along the same track.
- 6.6.4 Up-issue the SID chart to DET2R (Figure 14 on p.25).
- 6.6.5 As per the evidence supplied in paragraph 4.9 from p.14, aircraft already meet or exceed this proposed restriction.
- 6.7 Rwy 04 LAM2S (conventional)
  - 6.7.1 Change altitude restriction at LAM R025D09 from 3000ft to 3500ft
  - 6.7.2 Up-issue the SID chart and coding table to LAM3S (Figure 18 on p.29).
  - 6.7.3 As per the evidence supplied in paragraph 4.9 from p.14, aircraft already meet or exceed this proposed restriction.
- 6.8 Rwy 22 LAM3R (conventional)
  - 6.8.1 Add an altitude restriction at BKY R154D13.8 3000ft.
  - 6.8.2 Delete the altitude restriction at ROWAN (BKY R153.7D15.9) 3000ft
  - 6.8.3 This has the effect of moving the 3000ft restriction 2.1nm closer to the runway along the same track.
  - 6.8.4 Up-issue the SID chart to LAM4R (Figure 18 on p.29).
  - 6.8.5 As per the evidence supplied in paragraph 4.8 from p.12, aircraft already meet or exceed this proposed restriction.

## 7. Engagement Summary and Additional Evidence

- 7.1 Stansted Airport 'owns' the SIDs.
  - 7.1.1 Its senior management supports the way forward (Section 10 Annex para 10.1).
- 7.2 Most flights at Stansted are operated by Ryanair (ten times as many flights as the second most frequent operator). From 01 June to 30 September 2021 (the same 121 day period as analysed, but for 2021) they operated over 66% of flights at Stansted, averaging c.111 flights per day.
  - 7.2.1 Ryanair's performance department has reviewed the proposed changes and does not consider them as limiting (Section 10 Annex para 10.2).
- 7.3 The second most frequent operator at Stansted is Jet2. From 01 June to 30 September 2021 they operated c.6% of flights at Stansted (c.10 flights per day on average).
  - 7.3.1 Jet2's performance department has reviewed the proposed changes and agreed that operating their flights in the same manner they do today would meet the increased altitude restrictions and would not result in increased power settings to do so (Section 10 Annex para 10.3).
- 7.4 Ryanair and Jet2 accounted for c.72% of Stansted flights. We contend this is sufficient evidence that Stansted operators understand and accept these proposed changes. Other operators at Stansted have a far smaller proportion of flights (fewer than 4%), with 380 operators flying less frequently than once per week and over 300 flying less frequently than once per month on average.
- 7.5 Original unredacted emails for all three stakeholders will be forwarded to the CAA.
- 7.6 Additionally, our project team had opportunistic access to an Airbus A330 simulator and a Boeing 737-800 simulator for other project reasons.
  - 7.6.1 They were able to use spare time to input some test parameters and acquire photographs of the flight management system screens, which detail the predicted altitudes at each proposed restriction point.
  - 7.6.2 These are informal, however they support the conclusion drawn in this document.
  - 7.6.3 Those photographs will not be published but will be documented and sent direct to the CAA.

## **8. Overall Conclusion – and what happens next**

- 8.1 The proposed SID amendments increase altitude restrictions, but would not require any increases to aircraft engine settings, nor would there be any change in lateral distribution as a result.
- 8.2 We do not expect the proposal to change noise, local air quality, fuel or CO<sub>2</sub>/greenhouse gas impacts.
- 8.3 Therefore this would be a purely technical change to aeronautical data charts and coding tables, with no impact, as the aircraft already fly the same (or greater) altitudes by the proposed restriction points.
- 8.4 Neither would the change restrict climbs any more than they are restricted today.
- 8.5 The climb restrictions would be moved closer to what are already flown, in order to achieve the goal of raising the CAS bases as per the originally submitted ACP.
- 8.6 Separately, a NATS Approved Procedure Designer has submitted an appropriate Instrument Flight Procedure (IFP) data package in accordance with CAA requirements.
- 8.7 This will be assessed by the CAA's IFP regulators and, presuming they are approved, a formal AIP change request for these 8 SIDs will be submitted by NATS on behalf of Stansted Airport, in late November 2021 to be implemented in AIRAC02-2022 (24<sup>th</sup> February 2022).



## 9. ANNEX: Draft charts and coding tables (the following 12 pages)

Note: these are draft charts and tables to illustrate proposed changes to SIDs, they are not for flight. A separate formal instrument flight procedure package of data has been supplied to the CAA for their evaluation.

(This page is for pagination purposes)

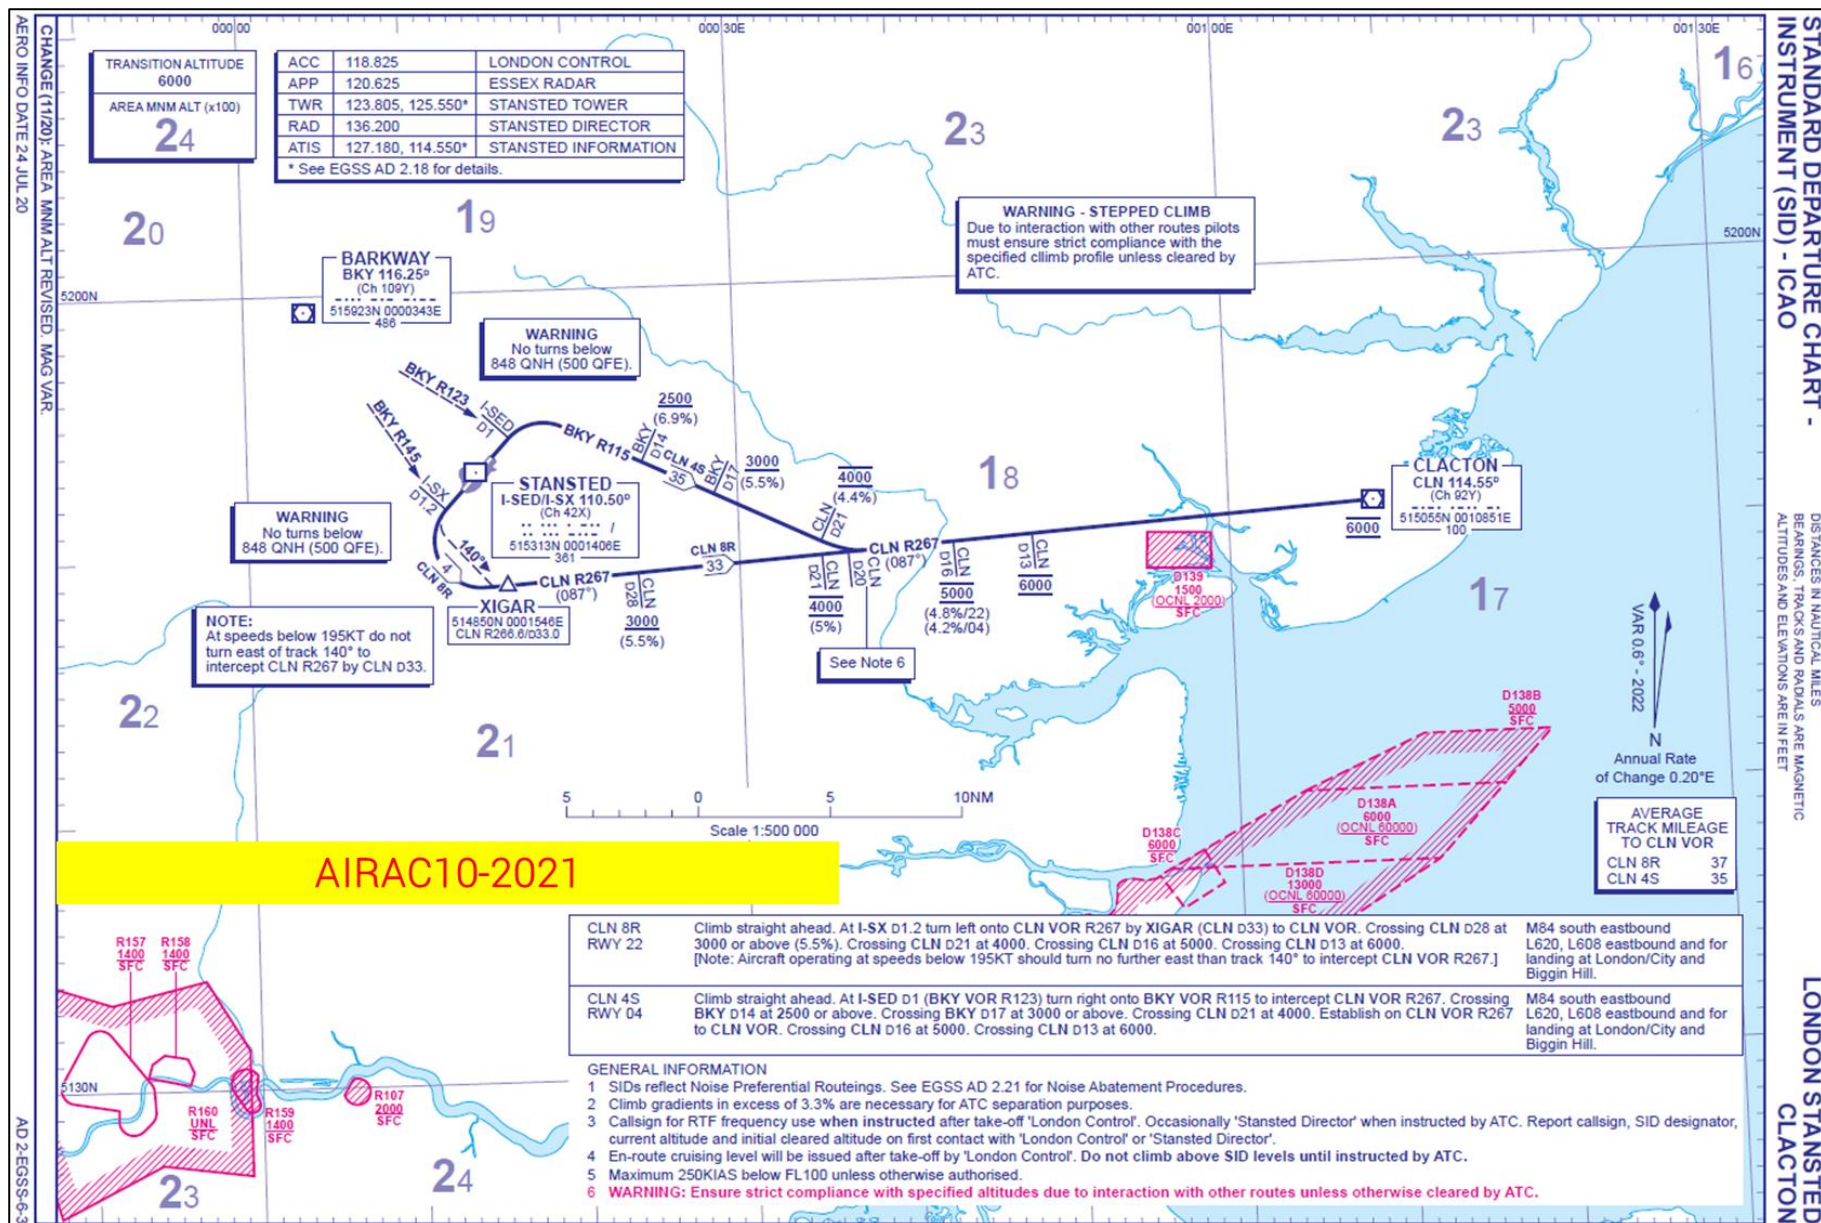


Figure 9 Current Rwy 04 CLN4S and Rwy 22 CLN8R as per AIRAC10-2021



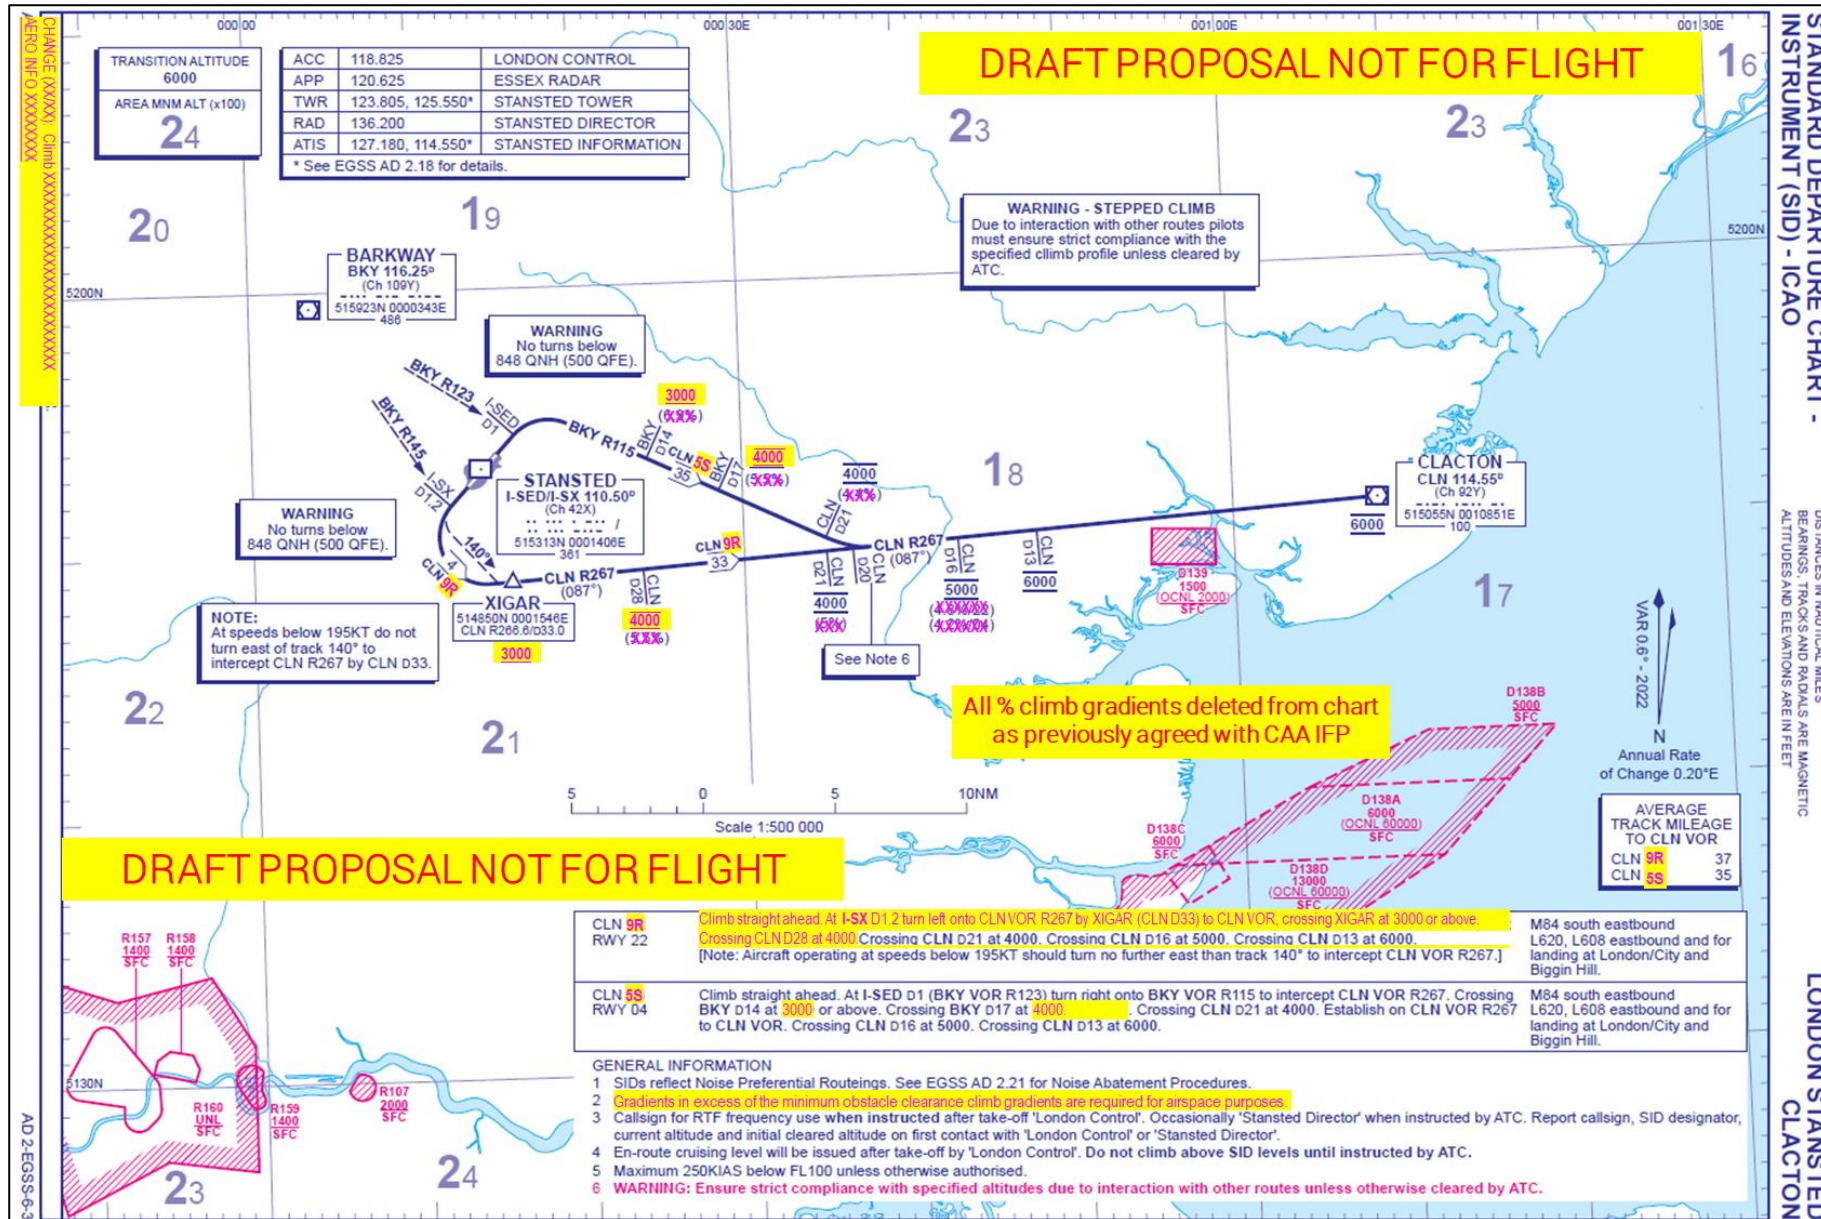


Figure 10 Rwy 04 CLN4S and Rwy 22 CLN8R, to CLN5S and CLN9R (conventional)

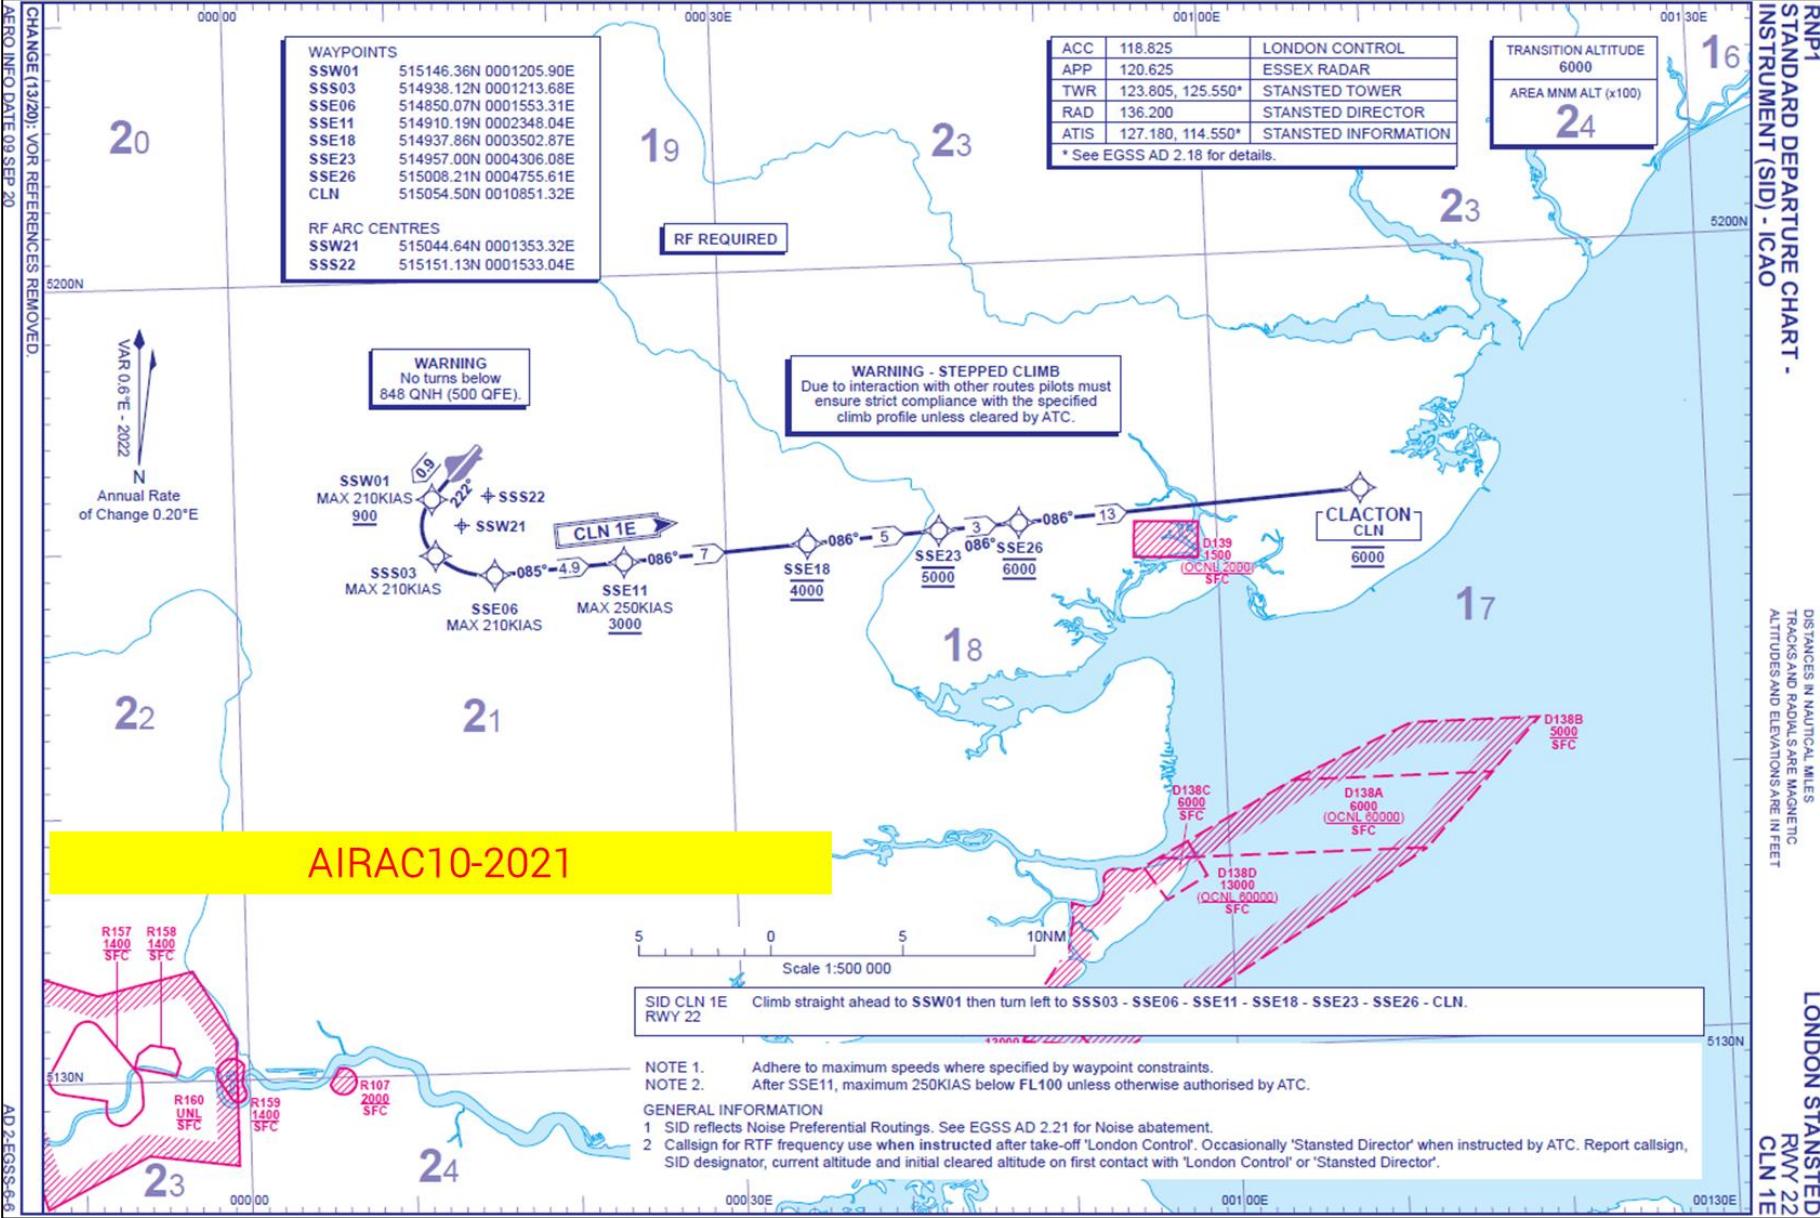


Figure 11 Current Rwy 22 CLN1E as per AIRAC10-2021



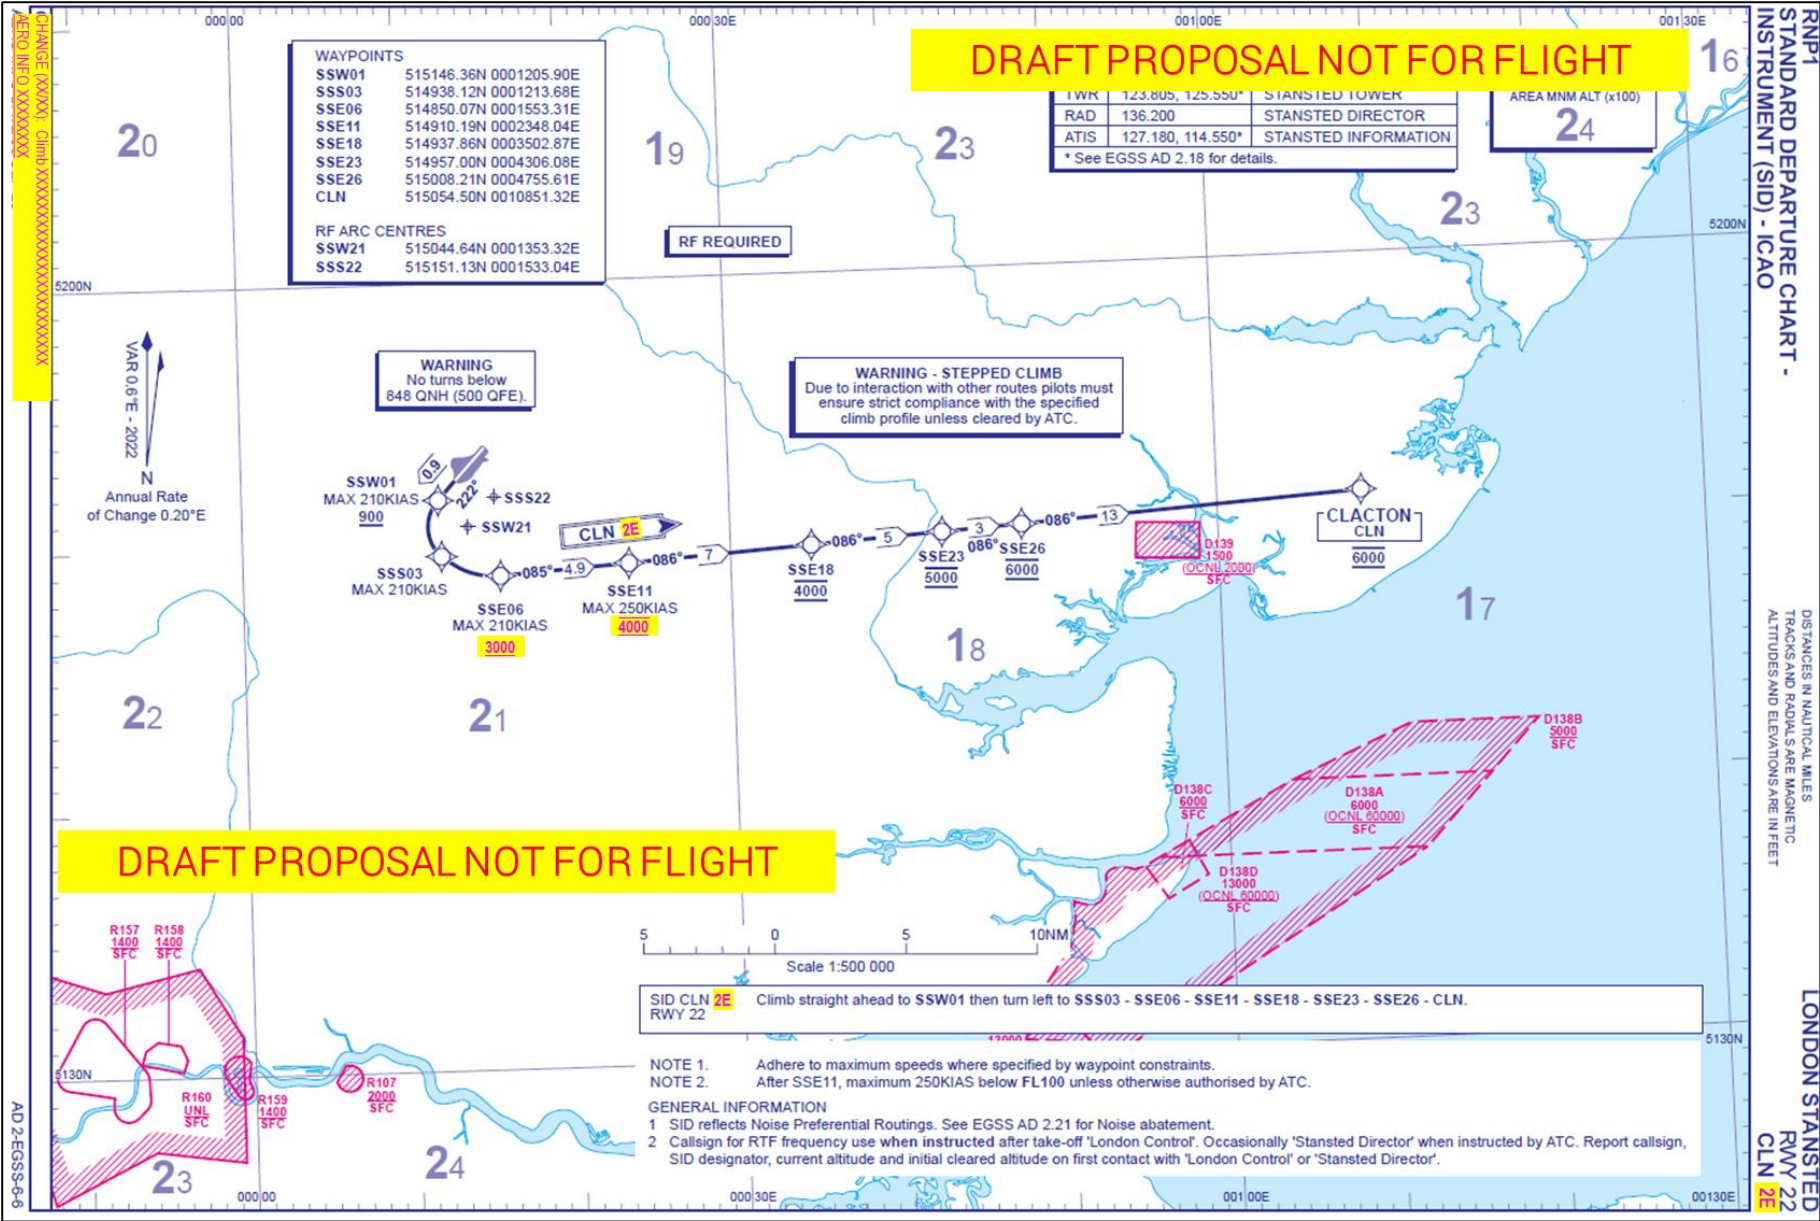


Figure 12 Rwy 22 CLN1E, to CLN2E (RNP1) Chart



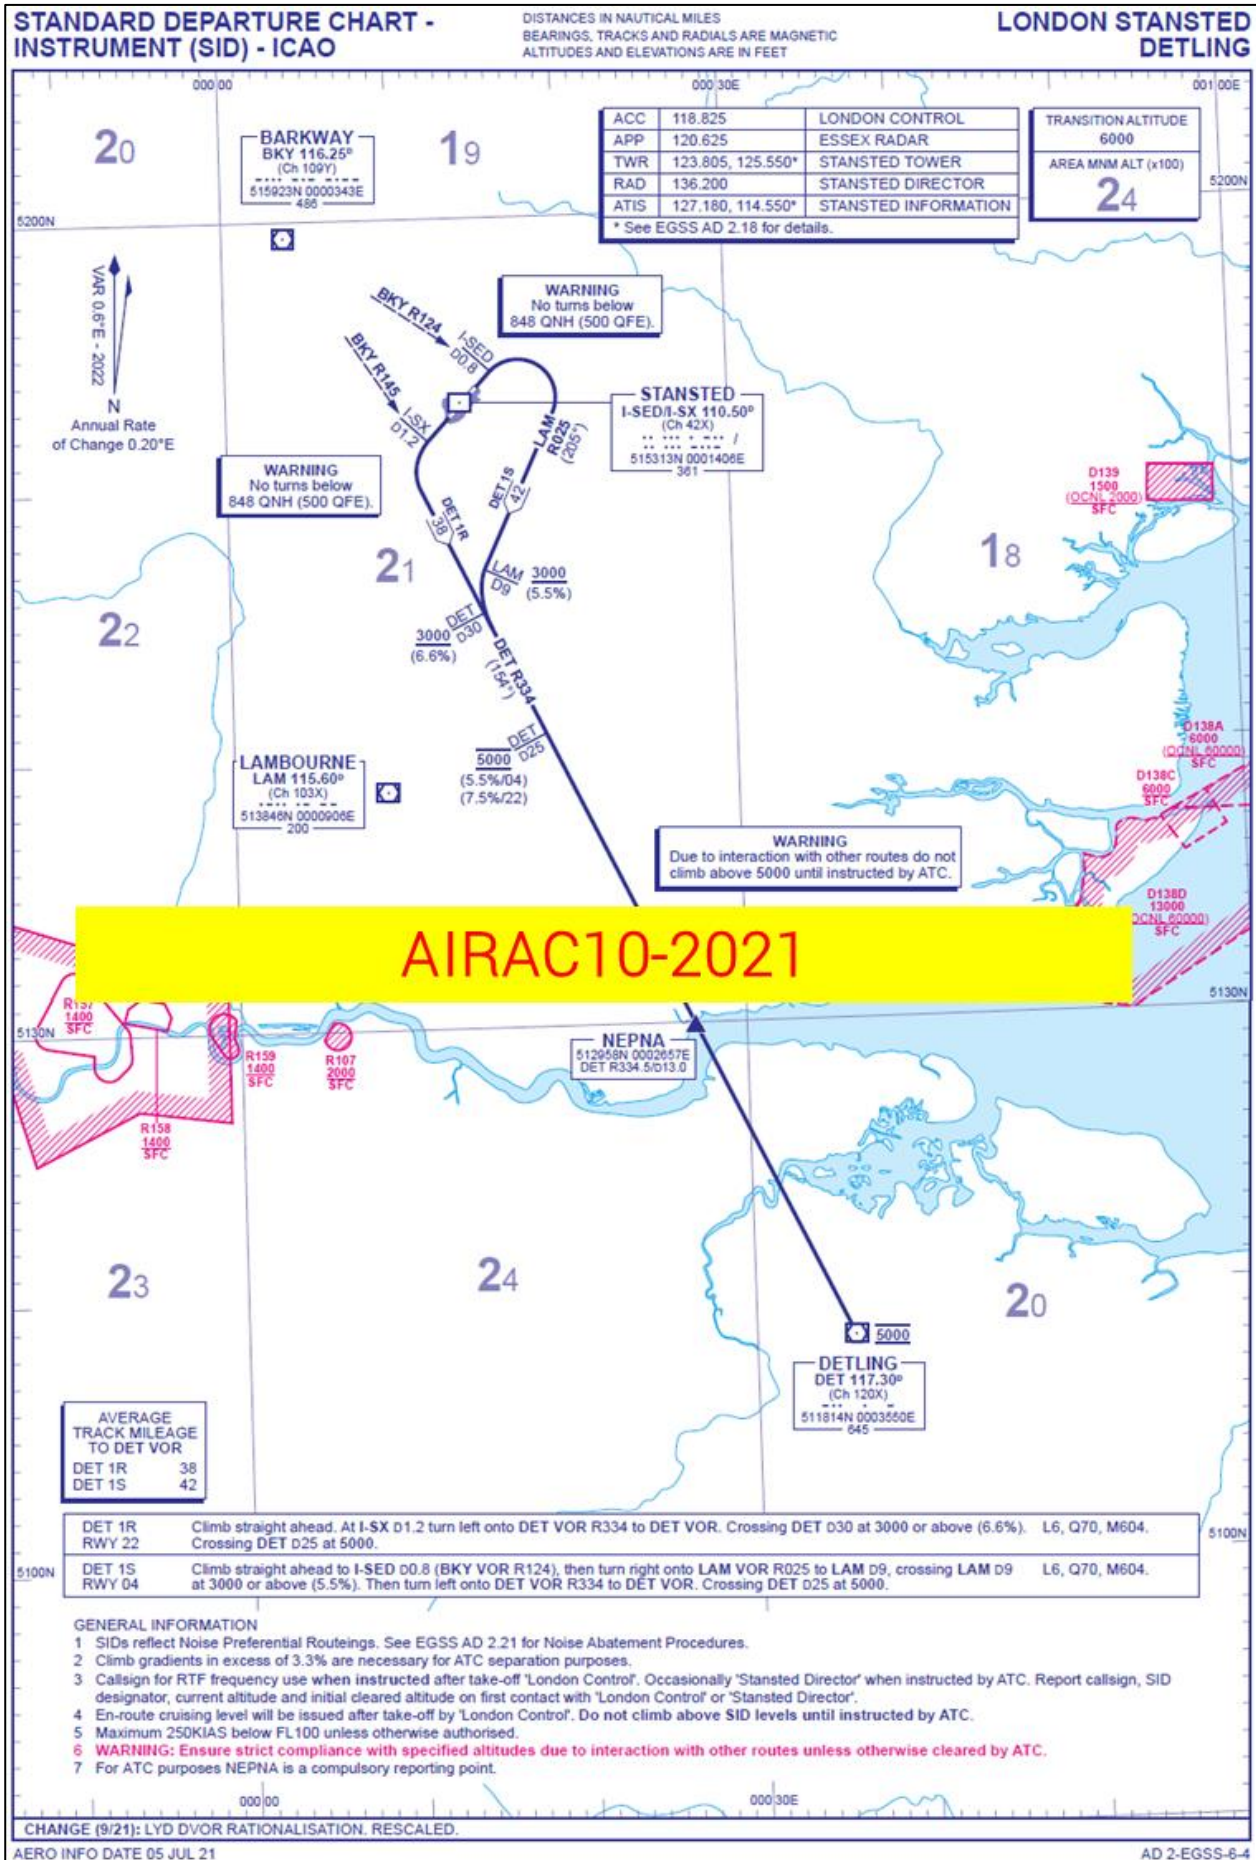


Figure 13 Current Rwy 04 DET1S and Rwy 22 DET1R as per AIRAC10-2021

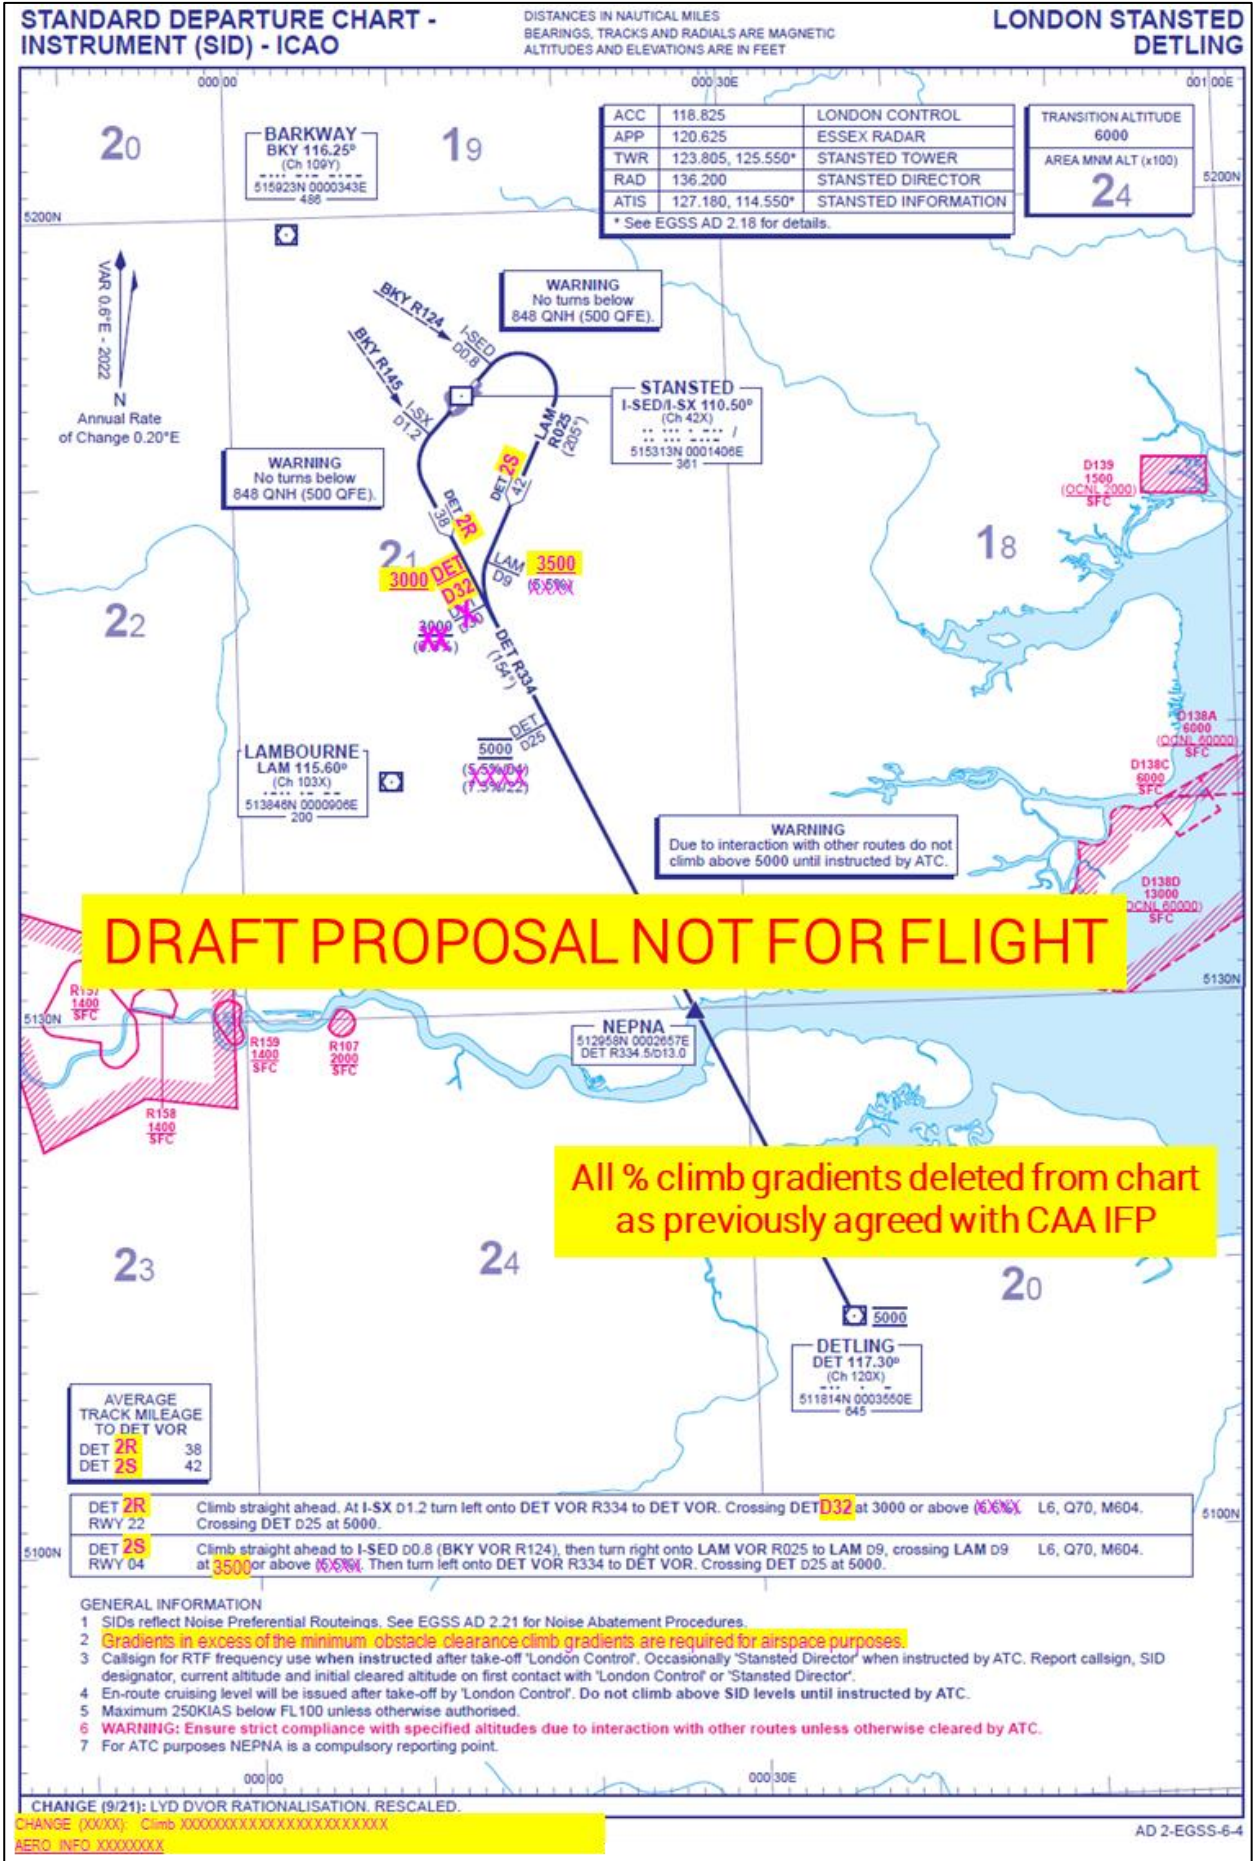


Figure 14 Rwy 04 DET1S and Rwy 22 DET1R, to DET2S and DET2R (conventional)





Figure 15 Current Rwy 04 DET1D as per AIRAC10-2021



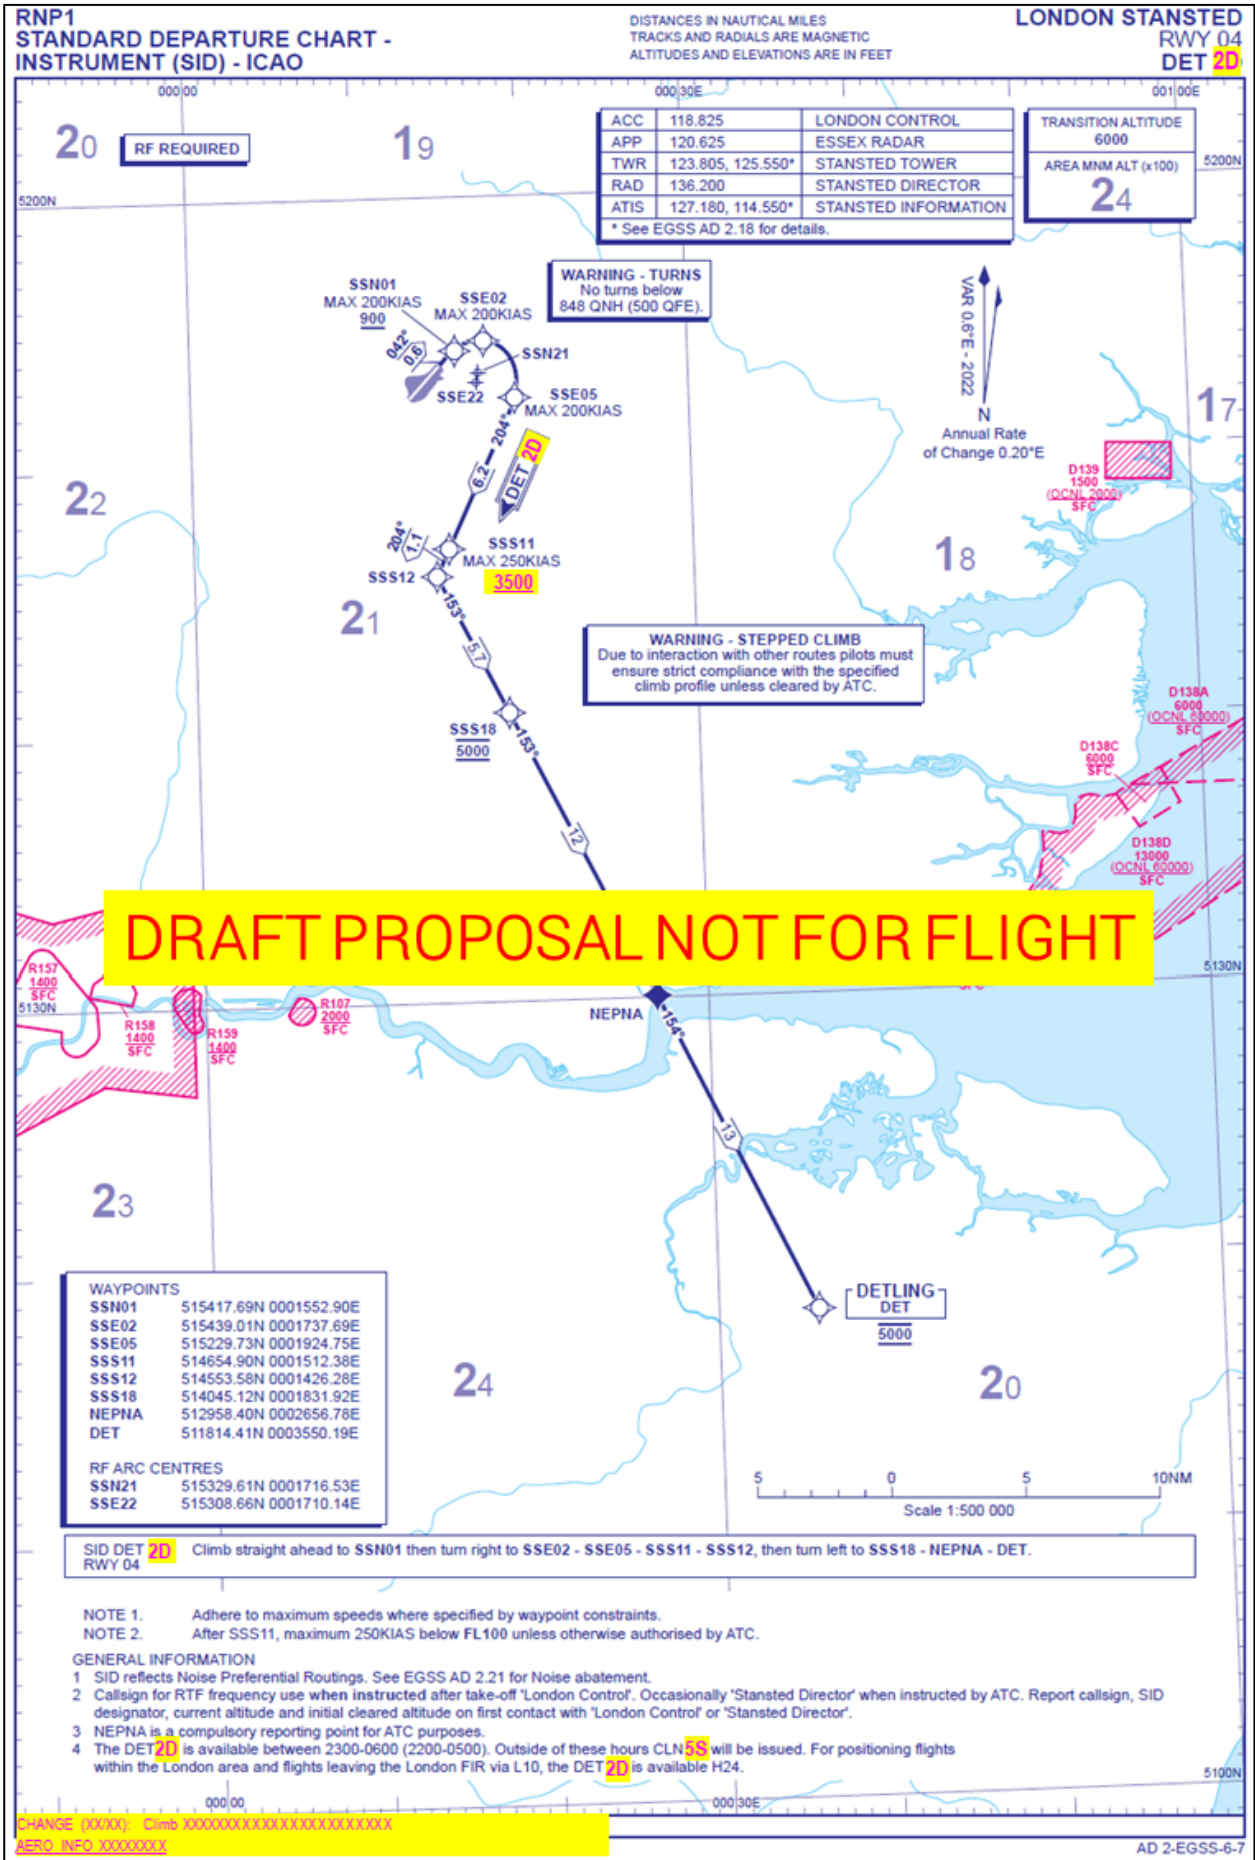


Figure 16 Rwy 04 DET1D, to DET2D (RNP1) Chart

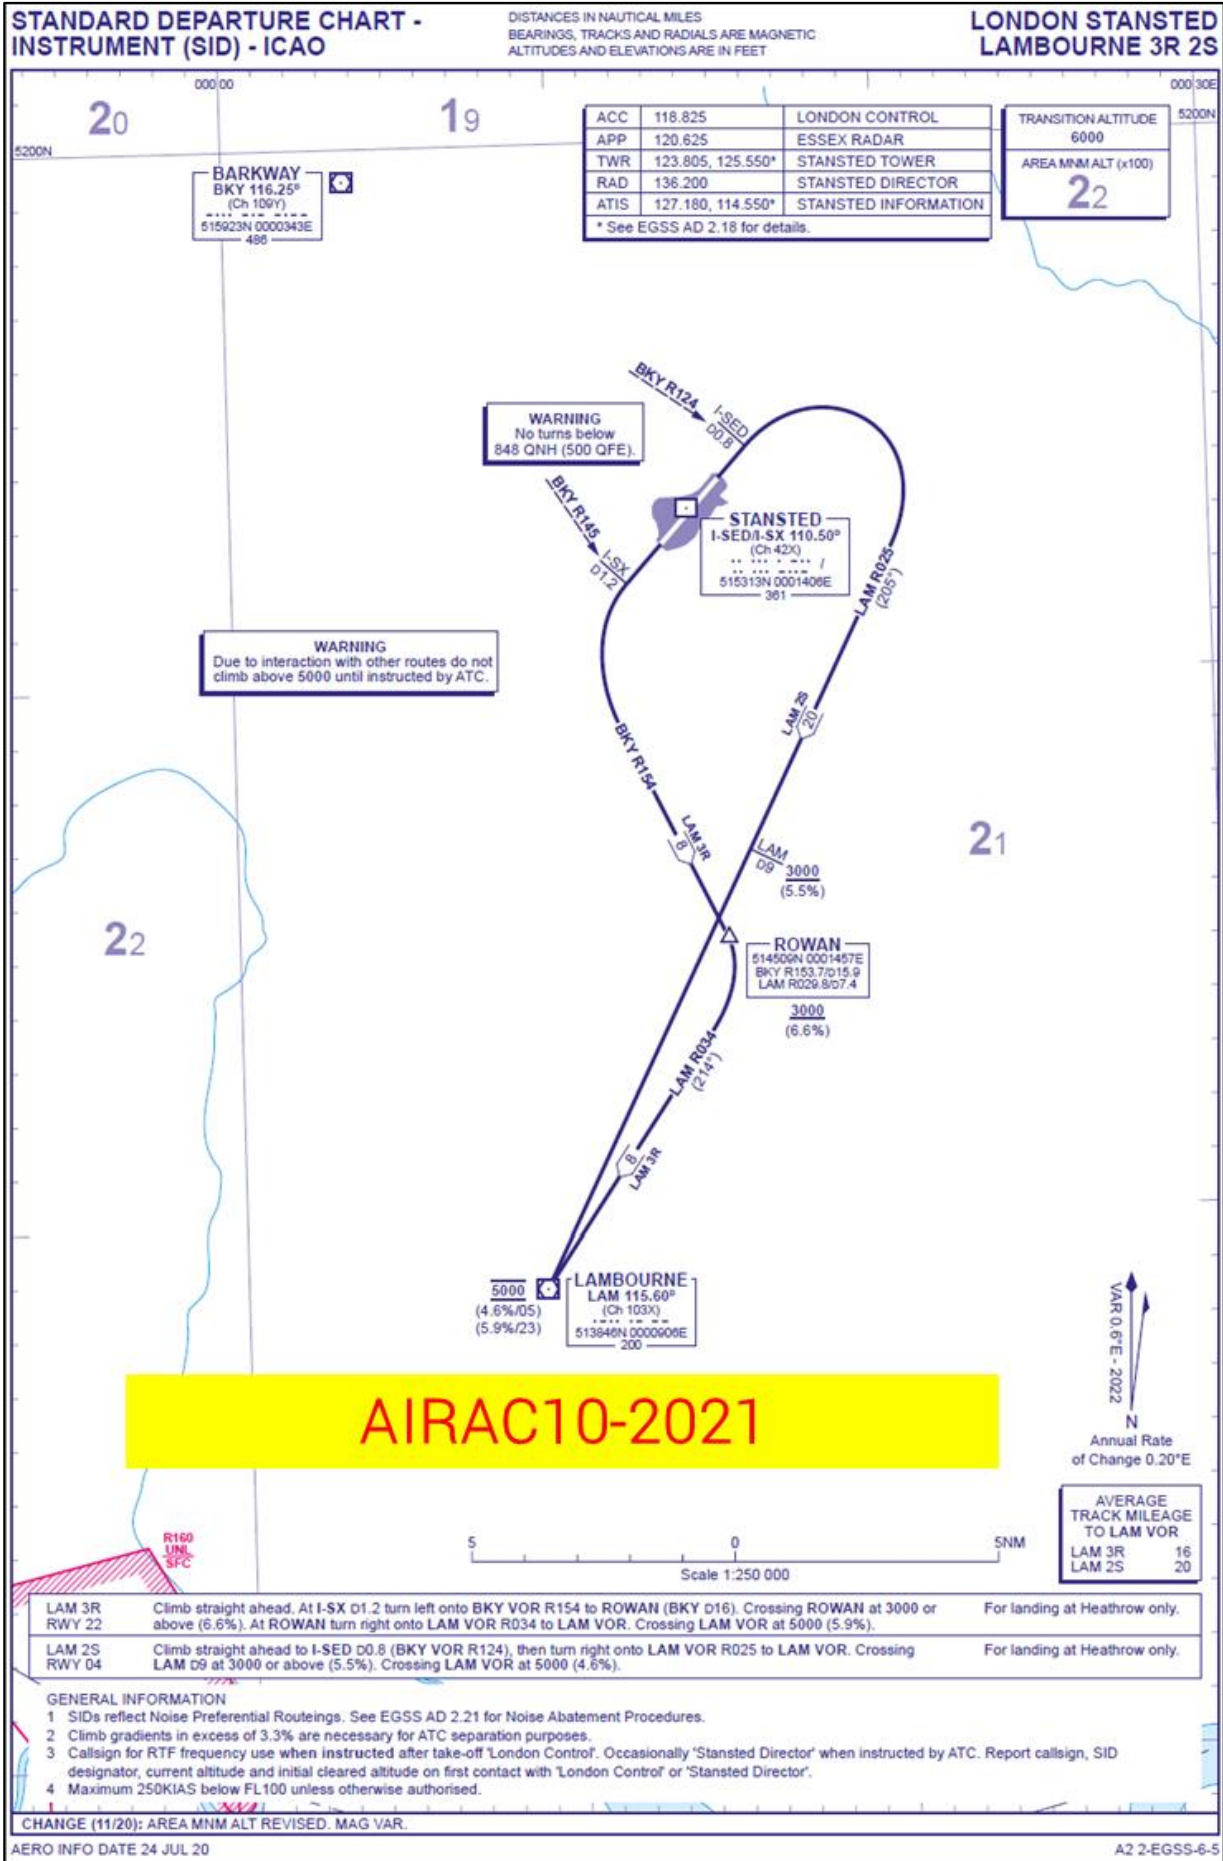


Figure 17 Current Rwy 22 LAM3R and Rwy 04 LAM2S as per AIRAC10-2021



Figure 18 Proposed Rwy 22 LAM3R and Rwy 04 LAM2S, to LAM4R and LAM3S (conventional)



## Standard Instrument Departure Coding Tables

**AIRAC10-2021**

### London Stansted Runway 22 CLN 1E

Designator	Sequence Number	Path Terminator	Waypoint Name	Waypoint Co-ordinates	Arc Centre Name	Arc Centre Co-ordinates	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Level Constraint	Speed Constraint (KT)	Navigation Performance
CLN 1E	001	CF	SSW01	515146.36N 0001205.90E	-	-	N	222° (222.9°)	0.6	0.9	-	+900	-210	RNP1
CLN 1E	002	RF	SSS03	514938.12N 0001213.68E	SSW21	515044.64N 0001353.32E	N	-	0.6	-	LEFT	-	-210	RNP1
CLN 1E	003	RF	SSE06	514850.07N 0001553.31E	SSS22	515151.13N 0001533.04E	N	-	0.6	-	LEFT	-	-210	RNP1
CLN 1E	004	TF	SSE11	514910.19N 0002348.04E	-	-	N	085° (086.0°)	0.6	4.9	-	+3000	-250	RNP1
CLN 1E	005	TF	SSE18	514937.86N 0003502.87E	-	-	N	086° (086.3°)	0.6	7.0	-	4000	-	RNP1
CLN 1E	006	TF	SSE23	514957.00N 0004306.08E	-	-	N	086° (086.3°)	0.6	5.0	-	5000	-	RNP1
CLN 1E	007	TF	SSE26	515008.21N 0004755.61E	-	-	N	086° (086.4°)	0.6	3.0	-	6000	-	RNP1
CLN 1E	008	TF	CLN	515054.50N 0010851.32E	-	-	N	086° (086.5°)	0.6	13.0	-	6000	-	RNP1

CHANGE (13/20): VOR REFERENCES REMOVED.  
AERO INFO DATE 09 SEP 20

AD 2-EGSS-6-8

Figure 19 RNP1 Coding Table: (above) Current Rwy 22 CLN1E as per AIRAC10-2021, (below) proposed CLN2E

## Standard Instrument Departure Coding Tables

**DRAFT PROPOSAL NOT FOR FLIGHT**

### London Stansted Runway 22 CLN 2E

Designator	Sequence Number	Path Terminator	Waypoint Name	Waypoint Co-ordinates	Arc Centre Name	Arc Centre Co-ordinates	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Level Constraint	Speed Constraint (KT)	Navigation Performance
CLN 2E	001	CF	SSW01	515146.36N 0001205.90E	-	-	N	222° (222.9°)	0.6	0.9	-	+900	-210	RNP1
CLN 2E	002	RF	SSS03	514938.12N 0001213.68E	SSW21	515044.64N 0001353.32E	N	-	0.6	-	LEFT	-	-210	RNP1
CLN 2E	003	RF	SSE06	514850.07N 0001553.31E	SSS22	515151.13N 0001533.04E	N	-	0.6	-	LEFT	+3000	-210	RNP1
CLN 2E	004	TF	SSE11	514910.19N 0002348.04E	-	-	N	085° (086.0°)	0.6	4.9	-	4000	-250	RNP1
CLN 2E	005	TF	SSE18	514937.86N 0003502.87E	-	-	N	086° (086.3°)	0.6	7.0	-	4000	-	RNP1
CLN 2E	006	TF	SSE23	514957.00N 0004306.08E	-	-	N	086° (086.3°)	0.6	5.0	-	5000	-	RNP1
CLN 2E	007	TF	SSE26	515008.21N 0004755.61E	-	-	N	086° (086.4°)	0.6	3.0	-	6000	-	RNP1
CLN 2E	008	TF	CLN	515054.50N 0010851.32E	-	-	N	086° (086.5°)	0.6	13.0	-	6000	-	RNP1

CHANGE (13/20): CLN 1E REFERENCES REMOVED.  
AERO INFO DATE 09 SEP 20

AD 2-EGSS-6-8

## Standard Instrument Departure Coding Tables

**AIRAC10-2021**

### London Stansted Runway 04 DET 1D

Designator	Sequence Number	Path Terminator	Waypoint Name	Waypoint Co-ordinates	Arc Centre Name	Arc Centre Co-ordinates	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Level Constraint	Speed Constraint (KT)	Navigation Performance
DET 1D	001	CF	SSN01	515417.69N 0001552.90E	-	-	N	042° (042.9°)	0.6	0.6	-	+900	-200	RNP1
DET 1D	002	RF	SSE02	515439.01N 0001737.69E	SSN21	515329.61N 0001716.53E	N	-	0.6	-	RIGHT	-	-200	RNP1
DET 1D	003	RF	SSE05	515229.73N 0001924.75E	SSE22	515308.66N 0001710.14E	N	-	0.6	-	RIGHT	-	-200	RNP1
DET 1D	004	TF	SSS11	514654.90N 0001512.38E	-	-	N	204° (205.1°)	0.6	6.2	-	+3000	-250	RNP1
DET 1D	005	TF	SSS12	514553.58N 0001426.28E	-	-	N	204° (205.0°)	0.6	1.1	LEFT	-	-	RNP1
DET 1D	006	TF	SSS18	514045.12N 0001831.92E	-	-	N	153° (153.7°)	0.6	5.7	-	5000	-	RNP1
DET 1D	007	TF	NEPNA	512958.40N 0002656.78E	-	-	N	153° (153.7°)	0.6	12.0	-	-	-	RNP1
DET 1D	008	TF	DET	511814.41N 0003550.19E	-	-	N	154° (154.5°)	0.6	13.0	-	5000	-	RNP1

CHANGE 11/2021: VOR REFERENCES REMOVED. SEQUENCE NUMBER 003 ARC CENTRE NAME CORRECTED. AERONAV DATE: 18 SEP 20

AD 2-EGSS-6-9

Figure 20 RNP1 Coding Table: (above) Current Rwy 04 DET1D as per AIRAC10-2021, (below) proposed DET2D

## Standard Instrument Departure Coding Tables

**DRAFT PROPOSAL NOT FOR FLIGHT**

### London Stansted Runway 04 DET 2D

Designator	Sequence Number	Path Terminator	Waypoint Name	Waypoint Co-ordinates	Arc Centre Name	Arc Centre Co-ordinates	Fly-over	Course/Track °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Level Constraint	Speed Constraint (KT)	Navigation Performance
DET 2D	001	CF	SSN01	515417.69N 0001552.90E	-	-	N	042° (042.9°)	0.6	0.6	-	+900	-200	RNP1
DET 2D	002	RF	SSE02	515439.01N 0001737.69E	SSN21	515329.61N 0001716.53E	N	-	0.6	-	RIGHT	-	-200	RNP1
DET 2D	003	RF	SSE05	515229.73N 0001924.75E	SSE22	515308.66N 0001710.14E	N	-	0.6	-	RIGHT	-	-200	RNP1
DET 2D	004	TF	SSS11	514654.90N 0001512.38E	-	-	N	204° (205.1°)	0.6	6.2	-	+3000	-250	RNP1
DET 2D	005	TF	SSS12	514553.58N 0001426.28E	-	-	N	204° (205.0°)	0.6	1.1	LEFT	-	-	RNP1
DET 2D	006	TF	SSS18	514045.12N 0001831.92E	-	-	N	153° (153.7°)	0.6	5.7	-	5000	-	RNP1
DET 2D	007	TF	NEPNA	512958.40N 0002656.78E	-	-	N	153° (153.7°)	0.6	12.0	-	-	-	RNP1
DET 2D	008	TF	DET	511814.41N 0003550.19E	-	-	N	154° (154.5°)	0.6	13.0	-	5000	-	RNP1







CHANGE 11/2021: CLIMB PERFORMANCE DATA TO BE DETERMINED. AERONAV DATE: 18 SEP 20


AD 2-EGSS-6-9



## 10. ANNEX: Engagement Emails (Redacted)


### 10.1 MAG Stansted Airport:



RE: SAIP AD6 discussion - STN response

  @magairports.com>  
To    
Cc  


 27/09/2021

 Follow up. Start by 27 September 2021. Due by 27 September 2021.  
You replied to this message on 27/09/2021 09:32.  


Hi 




I've just come off a call with  (Ops Dir) and  (Hd of Airside Ops).


As a team we're happy with your proposed way forward and will continue to support AD6 as a means for improving operations at both LTN and STN


Best regards  



### 10.2 Ryanair:




Re: Changes to Stansted SID Gradients

 Base Captain, STN   
To 

 08/10/2021

 You replied to this message on 08/10/2021 10:09.







Hi  our performance department has reviewed the changes and we don't see them as limiting under normal conditions from a climb gradient perspective.





Kind Regards  
Captain   
Base Captain Stansted  
Phone +44   
Mobile +44 



10.3 Jet2:



RE: Changes to Stansted SID gradients




 @jet2.com>  
To:     
Dear 




     
08:10


Thank you for the information.

Following our conversations, [Jet2.com](https://www.jet2.com) understands the proposed amendments to the altitude restrictions for these SIDs, and agrees with the NATS statement.

**Best regards,**  
  
  
**Aircraft Performance Manager**  
**Flight Operations Technical**


**[Jet2.com](https://www.jet2.com) & [Jet2holidays](https://www.jet2.com)**  
Low Fare Finder House      Direct Dial:   
Leeds Bradford Airport      Extension:   
Yeadon                              Mobile:   
LS19 7TU




**From:** @nats.co.uk>  
**Sent:** 22 October 2021 16:00  
**To:** @jet2.com>; @nats.co.uk>  
**Subject:** Changes to Stansted SID gradients

Dear 

Please find attached the draft changes to Stansted SID altitude restrictions, as discussed.

We can confirm, through our analysis of radar data, that Jet2's Stansted B738 fleet did not underfly the proposed altitude restrictions in summer 2019.  
If Jet2 continues to operate its fleet in the same manner, there is no reason to expect underflight of the proposed altitude restrictions when they go 'live', planned for AIRAC02-2022 (Thurs 24 Feb 2022).  
An increase in aircraft power settings would not be required, as evidenced by the radar analysis.

Best wishes  


**NATS**  
  
Airspace Change Expert  
Airspace Change Compliance & Delivery  
**Airspace & Future Operations**  
**WFH Mobile: +44**   
  
[jet2@nats.co.uk](mailto:jet2@nats.co.uk)    [www.nats.aero](http://www.nats.aero)

End of document