

Future Airspace Strategy Implementation (FASI)

London Terminal Manoeuvring Area (LTMA)

Airspace Change Proposal (ACP)

ACP-2020-043

ACP-2020-044

ACP-2020-045

Stage 2 Develop and Assess

Southampton Airport Arrivals Connectivity Module

Issue 1.3

To be read in conjunction with Master Document



**NATS**

A decorative graphic consisting of two parallel blue lines that start on the left side of the page and curve downwards and to the right, ending near the bottom right corner. The lines are smooth and have a slight gradient.

# 1. Introduction

## 1.1 About this document

- 1.1.1 This document describes the arrival connectivity options for Southampton airport, which have been developed using the methodology described in Section 2 of the Master document.
- 1.1.2 Southampton is a single runway airport sited on the south coast approximately 70 miles southwest of London. Up to March 2020, the majority of flights from Southampton were operated by Flybe, which went into administration in March 2020 and again in January 2023. Multiple operators now fly some of the routes previously flown by Flybe as well as some new routes.

## 2. Baseline

- 2.1.1 This description of the current airspace around Southampton should be considered the ‘Do Nothing’ option if no airspace change was to take place.
- 2.1.2 Table 1 shows actual<sup>1</sup> airport traffic counts from the 2019 baseline traffic year to 2022. The NERL forecast for network traffic levels is shown in the Master document Section 3.9. Airport forecasts are independent of the network and will be included within airport ACPs.

Year	Arrivals	Departures	Total Movements
2019	17,816	17,778	35,594
2020	5,386	5,260	10,646
2021	5,580	5,536	11,116
2022	10,039	9,954	19,993

**Table 1 Actual air traffic movements: Southampton Airport 2019-2022**

- 2.1.3 Southampton currently shares the same arrival procedures as Bournemouth, shown in Figure 1 and Table 2. One hold, SAM, provides for delay absorption.

Airport	Hold	STARs	Associated ATS Routes
Southampton	SAM	BUGUP 1S, THRED 1S, ELDAX 1S, UMBUR 2S, CPT 1S, COWLY 1S	L8, Y322, Q41, Y110, N20, M8, M40, Q63, Q41

**Table 2 Current arrival connectivity for Southampton**

- 2.1.4 Southampton does not have SIDs but has initial departure routes which join with the ATS route network at designated waypoints<sup>2</sup> (Table 3). These routes may be varied at the discretion of ATC.

Departure to	Via	Route
North	Q41	Q41 – NORRY
Northwest	Q41, Q63	Q41 – TABEN - KENET
East	GWC	GWC
South	Q41	NEDUL – Q41 / Z171
West	FIR	N/A

**Table 3 Current departure connectivity for Southampton**

<sup>1</sup> This is based on CFMU actual data for 2019; this may vary from airport data.

<sup>2</sup> Departure routes are all below 7,000ft and will be subject to Airport ACP. NERL will ensure network connectivity.



Figure 1 Current arrival procedures for Southampton

2.1.5 Figure 2 shows a radar density plot of Southampton arrival traffic for a typical busy summer week and indicates traffic distribution. The majority of traffic in 2019 arrived from the north.

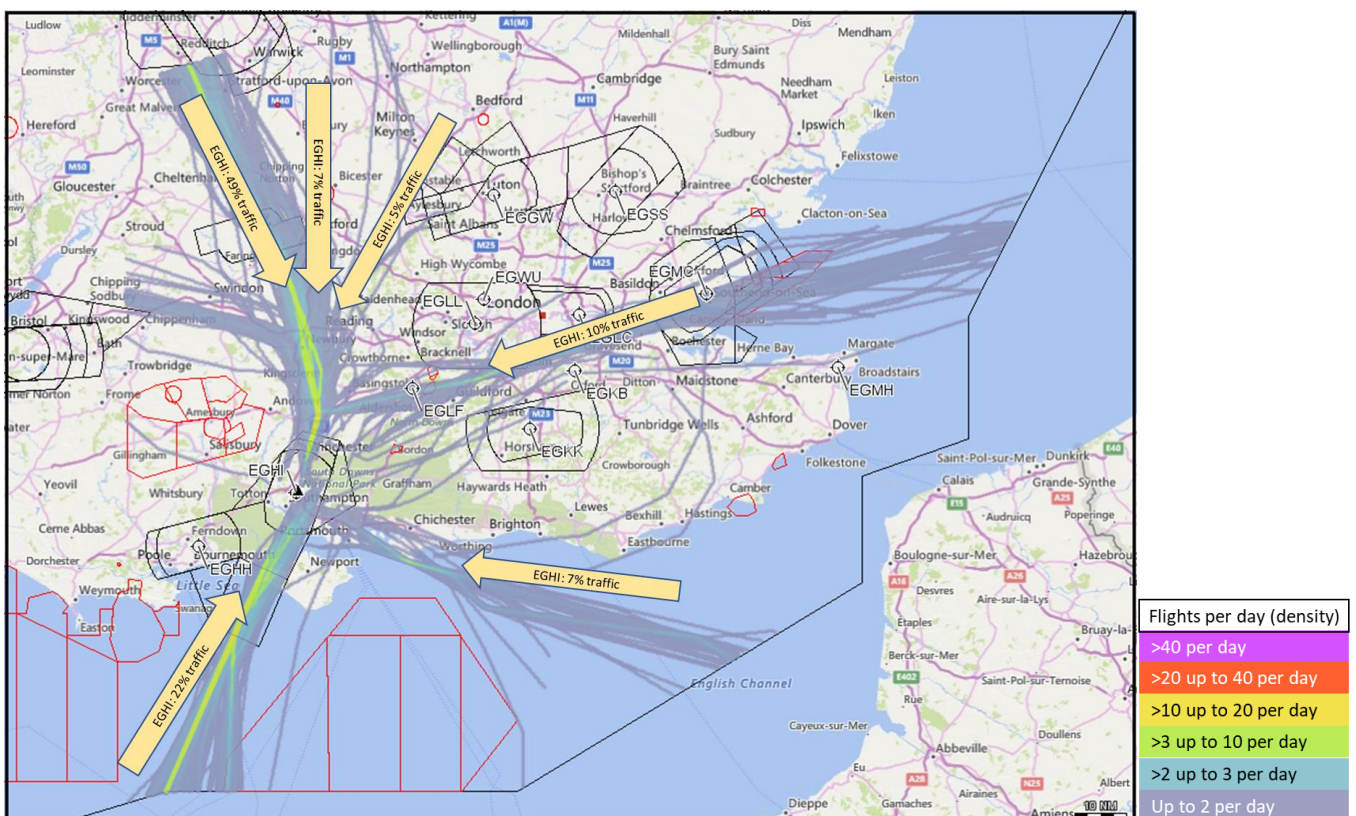


Figure 2 Southampton traffic density arrivals FL245-FL70 5-11 August 2019

2.1.6 Turboprop/piston/prop planes are the most prevalent aircraft type at Southampton, as shown in Table 4. Flybe was the most prevalent operator in 2019, with approximately 63% of the traffic.

Southampton – Aircraft Type			Southampton – Top 4 Aircraft Operator Usage		
Aircraft Group	Movements	% traffic	Operator	Movements	% traffic
Small Jet	4,185	12%	Flybe <sup>3</sup>	22,458	63%
Medium Jet	1,528	4%	Blue Islands	4,852	14%
Heavy Jet	4	<1%	Aurigny	2,680	8%
Turboprop/Piston/Prop	29,844	84%	Eastern Airways	1,186	3%

Table 4 Aircraft type and top carriers - Southampton

### 3. Design Development

3.1.1 Working with the airport, NERL developed 15 high-level concept options for Southampton<sup>4</sup>. NERL has assessed that based on required traffic loading, Southampton would require at least one hold, either attached to an RMA or attached to a systemised arrival structure. Initial viability assessments were produced for location and structure type (Figure 3) and presented to stakeholders in formal engagement (Ref 7). Feedback was requested through the engagement response questionnaire.

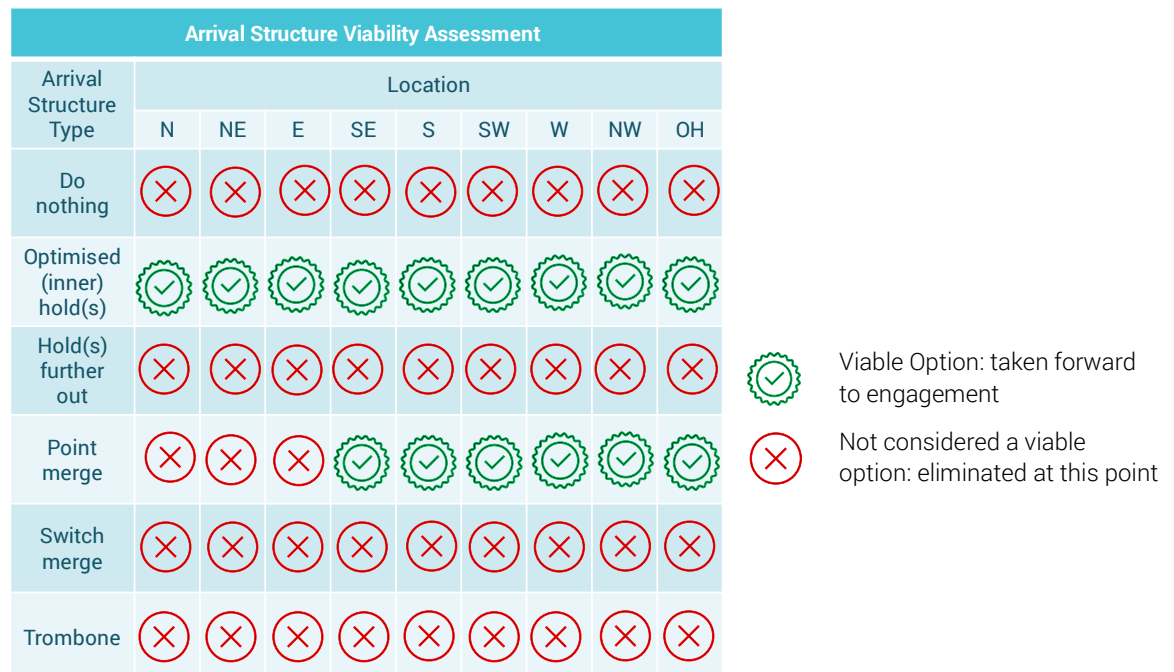


Figure 3 Engagement Initial Viability Matrix

### 3.2 Stakeholder engagement

- 3.2.1 We received 5 responses from 5 different stakeholders related to the Southampton design concepts. Table 5 presents a summary of the feedback and how this has influenced the design.
- 3.2.2 Feedback recognises that Southampton is a smaller airport with lower traffic demand compared to others in the LTMA and suggests this should be a consideration in the design development. This feedback has been used to inform the Design Principle Evaluation.
- 3.2.3 No new options were developed as a result of the stakeholder engagement.

<sup>3</sup> Flybe went into administration in March 2020 and again in January 2023. Some of Flybe’s routes at Southampton have been replaced by Loganair and BA CityFlyer.

<sup>4</sup> See Master document Section 2.2 for a detailed description of this work.

Stakeholder	Feedback ('You said')	Response ('We did')
<b>Airspace4All</b>	Supports holds at minor airports, with direct routings, to keep track miles minimal.	Feedback was used to inform the evaluation of DP1, DP2, DP3 & DP8 for each airport. However, the conceptual nature of the design options means that specific design decisions as a result of this feedback cannot be made until more detailed options are developed in Stage 3.
<b>Southampton Airport</b>	Not convinced that Southampton PM and/or shared PM with Bournemouth is a satisfactory approach model for Southampton operations; do not support PM options unless shown no increase to CO <sub>2</sub> emissions and/or impede CDO/CCO without additional miles. Not convinced there is sufficient airspace for a PM for Southampton arrivals, especially considering Farnborough, Heathrow and Gatwick interactions.	Feedback was used to inform the evaluation of DP3, DP5, DP6 and DP8. No new options and no amendment to the design envelope as a result of this feedback. The conceptual nature of the design options means that specific design decisions as a result of this feedback cannot be made until more detailed options are developed in Stage 3.
<b>British Airways</b>	Considering the number of movements at Southampton, this must be deprioritized to facilitate Heathrow and Gatwick efficiencies.	At this stage, no airport will be prioritised over another, as we strive for a balanced network-wide design. Stage 3 development will identify prioritisation needs.
<b>BGA</b>	Traffic demand at Southampton is low. Any network supporting structure should be proportionate to this level of traffic. In addition, this ACP should take the opportunity to site any Point Merge system over the sea.	Feedback was used to inform the evaluation of DP5 & DP6. Structures will be refined at Stage 3 in proportion to the traffic demand from a specific airport. No new options and no amendment to the design envelope as a result of this feedback.
<b>Gatwick Airport Limited</b>	Most concerned with designs to east and northeast. Provided these minimise interactions with Gatwick's arrival and westerly/south-westerly deps, no issues.	Appropriate deconfliction /colocation of specific routes will be determined at Stage 3. No new options and no amendment to the design envelope as a result of this feedback.

**Table 5 Engagement feedback and NERL response**

### 3.3 Southampton Design Concepts

- 3.3.1 Table 6 summarises the high-level qualitative considerations for potential locations for Southampton arrival structures, and Table 7 summarises the viability assessment for the arrival structures suitable for Southampton. These have been developed from SME input and stakeholder engagement.
- 3.3.2 Not every arrival structure concept may be viable in every location; the Viability Matrix (Figure 5) illustrates the possible combinations.
- 3.3.3 As described in the Master document paras 2.4.2 & 2.4.3, the concepts Holds Further Out and Trombones were removed as viable concepts at this stage. A detailed description of each structure can be found in Section 5 Appendix 1.

Location	Viability Considerations	
North		There is sufficient airspace to enable an arrival structure, and associated connectivity, to the north of the airfield, subject to deconfliction with Bournemouth, Farnborough and Heathrow traffic.
Northeast		There is sufficient airspace to enable an arrival structure, and associated connectivity, to the northeast of the airfield, subject to deconfliction with Farnborough, Gatwick and Heathrow traffic.
East		There is sufficient airspace to enable an arrival structure, and associated connectivity, to the east of the airfield, subject to deconfliction with Farnborough traffic.
Southeast		There is sufficient airspace to enable an arrival structure, and associated connectivity, to the southeast of the airfield, subject to deconfliction with Bournemouth, Farnborough and Gatwick traffic and Portsmouth DA Complex.
South		There is sufficient airspace to enable an arrival structure, and associated connectivity, to the south of the airfield, subject to deconfliction with Bournemouth traffic and Portsmouth DA Complex.
Southwest		There is sufficient airspace to enable an arrival structure, and associated connectivity, to the southwest of the airfield, subject to deconfliction with Bournemouth traffic and Portsmouth and Lulworth & Portland DA Complex.
West		There is sufficient airspace to enable an arrival structure, and associated connectivity, to the west of the airfield, subject to deconfliction with Bournemouth traffic.
Northwest		There is sufficient airspace to enable an arrival structure, and associated connectivity, to the northwest of the airfield, subject to deconfliction with Bournemouth traffic and Salisbury Plain DA Complex.
Overhead		An arrival structure overhead the airfield is already in place within the current design, albeit shared with another sponsor. A structure in this area remains possible, subject to deconfliction with Bournemouth traffic.

**Table 6 Southampton Arrivals: Location viability considerations – post engagement**

Structure	Viability Considerations	
Optimised (inner) holds		Optimisation of current day structures. There is sufficient airspace for optimised hold(s), and this would likely meet the runway throughput demands.
Point Merge		There is sufficient airspace to suitably place a Point Merge, in some directions. Based on traffic throughput, this may need to be a shared facility.
Switch Merge		There is insufficient airspace to suitably place a Switch Merge.

**Table 7 Southampton Arrival structures: Viability considerations – post engagement**

- 3.3.4 Figure 4 shows the Southampton design envelope, developed by SMEs through collaborative workshops and formal engagement with Southampton and other stakeholders. This design envelope is based on the viability considerations presented above in Table 6 & Table 7, developed through two-way engagement as shown in Table 5.
- 3.3.5 Airspace design constraints, as described in the Master document Section 3.5, are highlighted in orange. Considerations for Southampton are the Salisbury Plain, Portsmouth and Lulworth & Portland Danger Areas as shown.

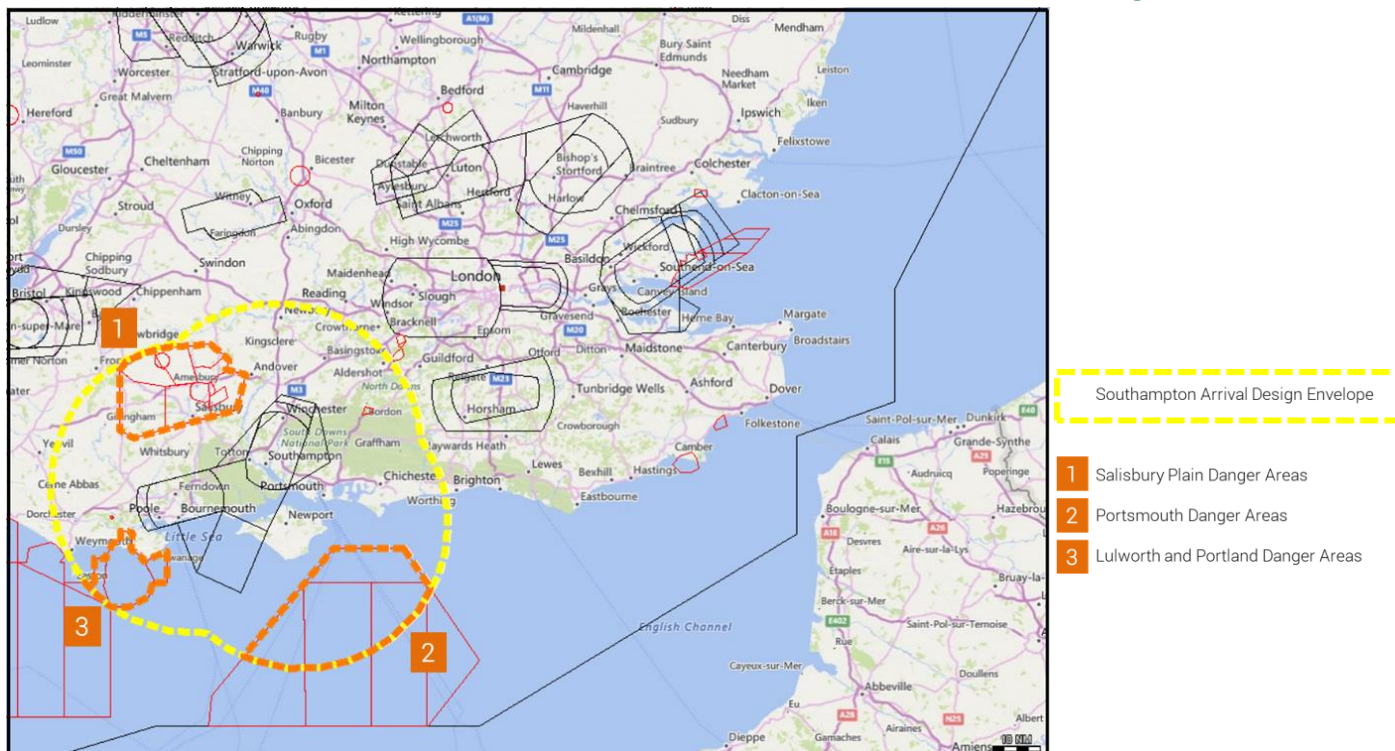


Figure 4 Southampton Design Envelope and design constraints – post engagement

3.3.6 The Southampton Design Concepts which were considered viable at this stage, within the Design Envelope presented, are shown in the Southampton Arrival Structure Viability Assessment (Figure 5).

Arrival Structure Viability Assessment												
Arrival Structure Type	Location											
	N	NE	E	SE	S	SW	W	NW	OH			
Do nothing	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	🟢	Viable Option: taken forward to DPE
Optimised (inner) hold(s)	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	✗	Not considered a viable option: eliminated at this point
Point merge	✗	✗	✗	🟢	🟢	🟢	🟢	🟢	🟢	🟢		
Switch merge	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗		

Figure 5 Southampton Design Options Comprehensive Viability Matrix

3.3.7 These 15 viable options were taken forward as the comprehensive list to Design Principle Evaluation, along with ‘Do Nothing’.

### 3.4 Design Principle Evaluation

3.4.1 Table 8 shows the DPE assessment criteria. SMEs<sup>5</sup>, in this case air traffic control experts and airspace change experts, list topics associated with each DP and qualitatively test how each option would react to those topics, describing how a red/amber/green outcome is reached.

DP	Priority	Description	SME subjective assessment topics, include but not limited to	Red	Amber	Green
0	A AMS	<b>Safety</b> Safety is always the highest priority  (Note: Red could not be solved by mitigation, amber may be able to be solved by mitigation).	Human performance (ATCO control-ability) Human performance (pilot fly-ability) IFP (fly-ability) Surrounding airspace users (inside/outside of CAS) Impact if ATM tools fail	Unacceptable level of safety risk	Diminished - Issue(s) identified could result in an elevated level of safety risk when compared to today's operation	Enhanced - improvement over today's level of safety. Maintained - safety risk could be maintained within acceptable levels of today's operation
1	B AMS	<b>Operational</b> The airspace will enable increased operational resilience	<u>Network</u> Weather avoidance Disruption in neighbouring ANSPs	Reduced resilience and capacity during disruption	Similar resilience and capacity during disruption	Increased resilience and capacity during disruption
			<u>Airport</u> Holding levels Delay absorption between hold and 7,000ft	Reduction in delay absorption	Delay absorption similar to today	Improve delay absorption
			<u>Airport</u> Time to restart after runway closure Number of aircraft off the hold	Reduction in disruption recovery	Disruption recovery similar to today	Improve disruption recovery
2	B	<b>Economic</b> Optimise network fuel performance	Track mileage Economic performance Aircraft height Method of delay absorption	Fuel performance worsened	Fuel performance similar to today	Fuel performance improved
3	B AMS	<b>Environmental</b> Optimise CO <sub>2</sub> emissions per flight	Track mileage GHG performance Aircraft height Method of delay absorption	CO <sub>2</sub> emissions worsened	CO <sub>2</sub> emissions similar to today	CO <sub>2</sub> emissions improved

<sup>5</sup> Where the Stakeholder Engagement Feedback tables state that feedback was used to inform the evaluation of one or more DPs, our SMEs take that feedback, add it to their wider knowledge and experience, and apply their combined judgment to the DPE for each option. The conceptual nature of the design options means that design decisions on each subject may not be possible at this stage. However, all feedback is considered by the SMEs in the round, and will also be carried forward into later stages as the concepts develop into more detailed options.



DP	Priority	Description	SME subjective assessment topics, include but not limited to	Red	Amber	Green
4	C	<b>Environmental</b> Minimising of noise impacts due to LAMP influence will take place in accordance with local needs	Overall environmental impact Environmental impact below 7,000ft Impact on tranquillity (or visual intrusion)	LAMP influence not aligned with local ACP sponsors' needs	Extent of alignment not yet known	LAMP influence fully aligned with local ACP sponsors' needs
5	C	<b>Technical</b> The volume of controlled airspace required for LAMP should be the minimum necessary to deliver an efficient airspace design, taking into account the needs of the UK airspace users	Lateral footprint of CAS Vertical footprint of CAS Proportional to airport traffic levels	Airspace required not the minimum necessary to deliver an efficient design	Extent of airspace required not yet known Or Similar CAS to today	Airspace required the minimum necessary to deliver an efficient design
6	C AMS	<b>Technical</b> The impacts on GA and other civilian airspace users due to LAMP will be minimised	Change to boundaries of CAS Changes to CAS classification Safety based impacts	Excessive negative impacts	Negative impacts minimised but requires changes to other airspace users' activities Or Similar impacts to today	Positive impacts to other airspace users' current activities
7	C AMS	<b>Technical</b> The impacts on MoD users due to LAMP will be minimised	Overall amount of danger area available Amount of time for danger area available Flexible use airspace provision Change to access between danger areas Safety based impacts Radar corridor access	Negative impacts not minimised or would require excessive changes to current MoD operations	Negative impacts minimised but requires changes to current MoD operations Or Extent of impact not yet known	Negative impacts minimised or no negative impact on current MoD operations
8	B AMS	<b>Operational</b> Systemisation will deliver the optimal capacity and efficiency benefits  (Note: This is about airspace capacity, not ground infrastructure capacity which could be the limiting factor to overall airport capacity).	Traffic throughput Sectorisation Effect on overall network capacity Effect on airports' arrival flow	Design option unable to support the forecast traffic loading for the airport and the network	Design option supports the forecast traffic loading for the airport or the network	Design option supports the forecast traffic loading beyond the reference period for both the airport and the network
			Overall ATCO workload Levels of tactical intervention (radio transmissions per flight) No increase to operations requirements Balancing out of hot spots	Design option increases ATCO workload	ATCO workload similar to today	Design option decreases ATCO workload

DP	Priority	Description	SME subjective assessment topics, include but not limited to	Red	Amber	Green
9	B AMS	<p><b>Technical</b> The main route network linking airport procedures with the En Route phase of flight will be spaced to yield maximum safety and efficiency benefits by using an appropriate standard of PBN</p> <p>(Note: The main route network is considered as FL70 - FL245. Approach structures are not considered as 'the main route network').</p>	Airspace requirement vs. RNAV rating Required aircraft equipage standards	PBN standard applied to route spacing would maintain or decrease efficiency and maintain safety	PBN standard applied to route spacing would limit efficiency and safety benefits	PBN standard applied to route spacing is likely to maximise efficiency and safety benefits
10	A	<p><b>Policy</b> Must accord with the CAA's published Airspace Modernisation Strategy (CAP1711) and any current or future plans associated with it.</p>	<p><u>AMS "Ends" Strategic Objectives</u> Safety (DP0) Integration of diverse users (DP6 and DP7) Simplification (DP1, DP8 and DP9) Environmental sustainability (DP3)</p>	No or limited alignment with the AMS	Partial alignment with the AMS	Aligned with the AMS

**Table 8 Design Principle Evaluation Assessment Criteria**

3.4.2 Table 9 shows the AMS assessment criteria which are used to determine the overall RAG status for DP10.

DP10 outcome	Criteria for DP0, DP1, DP3, DP6, DP7, DP8 and DP9
<b>Red</b>	DP0 (Safety) is red OR 2 other DPs are red
<b>Amber</b>	All other colour combinations not covered by Red or Green
<b>Green</b>	2 DPs are green and 0 are red OR 3 DPs are green and 1 is red

**Table 9 - AMS Assessment Criteria**

3.4.3 The criteria in Table 10 describe how each option's overall combination of reds/ambers/greens lead to the option progressing to the next step or to rejection and discounting from further development.

DP Priority	Criteria for Rejection Status
<b>A</b>	1 red OR 1 amber
<b>B</b>	2 reds
<b>C</b>	2 reds

**Table 10 - Accept / Reject Criteria**

3.4.4 Each design option has been assessed against the Design Principles. The following code is used for each design option. Airport (e.g. HI) - Structure Type (e.g. Inner Hold: IH/Point Merge: PM) - Location (e.g. Northeast: NE). DN = Do Nothing. DM = Do Minimum.

DP	Priority	HI - DN (Shared)	HI - IH - N (Maybe shared)	HI - IH - NE (Maybe shared)
RESULT		REJECT	ACCEPT	REJECT
DP0 Safety	A AMS	Maintained: Similar operation to today	Maintained: Holds are used in current day operations and are known to be safe	Maintained: Holds are used in current day operations and are known to be safe
DP1 Operational (Delay Absorption)	B AMS	Today's operation, no change from baseline	Optimised concept of current day operation, which provides similar delay absorption	Optimised concept of current day operation, which provides similar delay absorption
DP1 Operational (Disruption Recovery)	B AMS	Today's operation, no change from baseline	Optimised concept of current day operation, which provides improved disruption recovery	Optimised concept of current day operation, which provides improved disruption recovery
DP2 Economic (Fuel)	B	Today's operation, no change from baseline	Optimised concept, partially aligned with airport traffic flows, therefore fuel performance neutral	Does not align with airport traffic flows. Fuel performance worsened
DP3 Environmental (CO <sub>2</sub> )	B AMS	Today's operation, no change from baseline	Optimised concept, partially aligned with airport traffic flows, therefore CO <sub>2</sub> emissions neutral	Does not align with airport traffic flows, therefore increased track miles and CO <sub>2</sub> emissions per flight worsened
DP4 Environmental (Noise)	C	Today's operation, no change from baseline	Impact on routes (and noise distribution) below 7,000ft not known at this point	Impact on routes (and noise distribution) below 7,000ft not known at this point
DP5 Technical (CAS)	C	Today's operation, no change from baseline	A design to the north may require additional CAS, depending on location. Therefore, extent not yet known	Design likely to be within current day CAS; ability to return CAS will be assessed in Stage 3
DP6 Technical (Other Users)	C AMS	Today's operation, no change from baseline	Potential additional CAS to the north may require changes to other airspace users' activities	Likely to be in current day CAS, no anticipated change in impacts
DP7 Technical (MoD)	C AMS	Operation is known not to impact MoD currently, therefore no change in impact	Assumes design would not impact Salisbury Plain DA Complex. Therefore, no negative impact on current MoD operations	No military-use areas in the vicinity, therefore, would not require a change to MoD operations
DP8 Operational (Capacity)	B AMS	Aligns with network traffic flows but does not support forecast network loading. Can support the airport required arrival loading	Aligns with network traffic flows and concept can support the airport required arrival loading	Supports the required airport arrival loading, however, negatively impacts capacity of south and westbound network traffic flows
DP8 Operational (Efficiency)	B AMS	Today's operation, no change in ATCO workload anticipated	Similar concept to today's operation, therefore no change in ATCO workload anticipated	Similar concept to today's operation. Negatively impact on network traffic flows. Net increase in workload
DP9 Technical (Route Spacing)	B AMS	Does not fully utilise the performance capabilities of modern aircraft	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes
DP10 Policy (AMS)	A	Green: DP0, DP7 Amber: DP1, DP1, DP3, DP6, DP8, DP8 Red: DP9	Green: DP0, DP1, DP7, DP8, DP9 Amber: DP1, DP3, DP6, DP8 Red: None	Green: DP0, DP1, DP7, DP9 Amber: DP1, DP6, DP8 Red: DP3, DP8

DP	Priority	HI - IH – E (Maybe shared)	HI - IH – SE (Maybe shared)	HI - IH – S (Maybe shared)
RESULT		REJECT	ACCEPT	ACCEPT
DP0 Safety	A AMS	Maintained: Holds are used in current day operations and are known to be safe	Maintained: Holds are used in current day operations and are known to be safe	Maintained: Holds are used in current day operations and are known to be safe
DP1 Operational (Delay Absorption)	B AMS	Optimised concept of current day operation, which provides similar delay absorption	Optimised concept of current day operation, which provides similar delay absorption	Optimised concept of current day operation, which provides similar delay absorption
DP1 Operational (Disruption Recovery)	B AMS	Optimised concept of current day operation, which provides improved disruption recovery	Optimised concept of current day operation, which provides improved disruption recovery	Optimised concept of current day operation, which provides improved disruption recovery
DP2 Economic (Fuel)	B	Does not align with airport traffic flows. Fuel performance worsened	Optimised concept, partially aligned with airport traffic flows, therefore fuel performance neutral	Optimised concept, partially aligned with airport traffic flows, therefore fuel performance neutral
DP3 Environmental (CO <sub>2</sub> )	B AMS	Does not align with airport traffic flows, therefore increased track miles and CO <sub>2</sub> emissions per flight worsened	Optimised concept, partially aligned with airport traffic flows, therefore CO <sub>2</sub> emissions neutral	Optimised concept, partially aligned with airport traffic flows, therefore CO <sub>2</sub> emissions neutral
DP4 Environmental (Noise)	C	Impact on routes (and noise distribution) below 7,000ft not known at this point	Impact on routes (and noise distribution) below 7,000ft not known at this point	Impact on routes (and noise distribution) below 7,000ft not known at this point
DP5 Technical (CAS)	C	Design likely to be within current day CAS; ability to return CAS will be assessed in Stage 3	A design to the southeast may require additional CAS, depending on location. Therefore, extent not yet known	A design to the south may require additional CAS, depending on location. Therefore, extent not yet known
DP6 Technical (Other Users)	C AMS	Likely to be in current day CAS, no anticipated change in impacts	Potential additional CAS may require changes to other airspace users' activities	Potential additional CAS may require changes to other airspace users' activities
DP7 Technical (MoD)	C AMS	No military-use areas in the vicinity, therefore, would not require a change to MoD operations	Assumes design would not impact Portsmouth DA Complex. Therefore, no negative impact on current MoD operations	Assumes design would not impact Portsmouth DA Complex. Therefore, no negative impact on current MoD operations
DP8 Operational (Capacity)	B AMS	Supports the required airport arrival loading, however, negatively impacts capacity of south and westbound network traffic flows	Supports the required airport arrival loading, however, negatively impacts capacity of south and westbound network traffic flows	Aligns with network traffic flows and concept can support the airport required arrival loading
DP8 Operational (Efficiency)	B AMS	Similar concept to today's operation. Negative impact on network traffic flows. Net increase in workload	Similar concept to today's operation. Minor negative impact on network traffic flow, therefore no change in ATCO workload anticipated	Similar concept to today's operation, therefore no change in ATCO workload anticipated
DP9 Technical (Route Spacing)	B AMS	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes
DP10 Policy (AMS)	A	Green: DP0, DP1, DP7, DP9 Amber: DP1, DP6, DP8 Red: DP3, DP8	Green: DP0, DP1, DP7, DP9 Amber: DP1, DP3, DP6, DP8, DP8 Red: None	Green: DP0, DP1, DP7, DP8, DP9 Amber: DP1, DP3, DP6, DP8 Red: None

DP	Priority	HI - IH – SW (Maybe shared)	HI - IH – W (Maybe shared)	HI - IH – NW (Maybe shared)
RESULT		ACCEPT	REJECT	REJECT
DP0 Safety	A AMS	Maintained: Holds are used in current day operations and are known to be safe	Maintained: Holds are used in current day operations and are known to be safe	Maintained: Holds are used in current day operations and are known to be safe
DP1 Operational (Delay Absorption)	B AMS	Optimised concept of current day operation, which provides similar delay absorption	Optimised concept of current day operation, which provides similar delay absorption	Optimised concept of current day operation, which provides similar delay absorption
DP1 Operational (Disruption Recovery)	B AMS	Optimised concept of current day operation, which provides improved disruption recovery	Optimised concept of current day operation, which provides improved disruption recovery	Optimised concept of current day operation, which provides improved disruption recovery
DP2 Economic (Fuel)	B	Optimised concept, partially aligned with airport traffic flows, therefore fuel performance neutral	Does not align with airport traffic flows. Fuel performance worsened	Optimised concept, partially aligned with airport traffic flows, therefore fuel performance neutral
DP3 Environmental (CO <sub>2</sub> )	B AMS	Optimised concept, partially aligned with airport traffic flows, therefore CO <sub>2</sub> emissions neutral	Does not align with airport traffic flows, therefore increased track miles and CO <sub>2</sub> emissions per flight worsened	Optimised concept, partially aligned with airport traffic flows, therefore CO <sub>2</sub> emissions neutral
DP4 Environmental (Noise)	C	Impact on routes (and noise distribution) below 7,000ft not known at this point	Impact on routes (and noise distribution) below 7,000ft not known at this point	Impact on routes (and noise distribution) below 7,000ft not known at this point
DP5 Technical (CAS)	C	A design to the SW may require additional CAS, depending on location. Therefore, extent not yet known	Design would require more CAS than would be needed for alternative orientations	Design would require more CAS than would be needed for alternative orientation
DP6 Technical (Other Users)	C AMS	Potential additional CAS may require changes to other airspace users' activities	Additional CAS required, anticipated excessive negative impact	Additional CAS required, anticipated excessive negative impact
DP7 Technical (MoD)	C AMS	No military-use areas in the vicinity, therefore, would not require a change to MoD operations	Assumes design would not impact Salisbury Plain DA Complex. Therefore, no negative impact on current MoD operations	Assumes design would not impact Salisbury Plain DA Complex. Therefore, no negative impact on current MoD operations
DP8 Operational (Capacity)	B AMS	Aligns with network traffic flows and concept can support the airport required arrival loading	Aligns with network traffic flows and concept can support the airport required arrival loading	Aligns with network traffic flows and concept can support the airport required arrival loading
DP8 Operational (Efficiency)	B AMS	Assumes CAS is agreed if required, therefore workload similar as today	Assumes CAS is agreed if required, therefore workload similar as today	Assumes CAS is agreed if required, therefore workload similar as today
DP9 Technical (Route Spacing)	B AMS	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes
DP10 Policy (AMS)	A	Green: DP0, DP1, DP7, DP8, DP9 Amber: DP1, DP3, DP6, DP8 Red: None	Green: DP0, DP1, DP7, DP8, DP9 Amber: DP1, DP8 Red: DP3, DP6	Green: DP0, DP1, DP7, DP8, DP9 Amber: DP1, DP3, DP8 Red: DP6

DP	Priority	HI - IH - OH (DM) (Maybe shared)	HI - PM - SE (Maybe shared)	HI - PM - S (Maybe shared)
RESULT		ACCEPT	REJECT	REJECT
DP0 Safety	A AMS	Maintained: Holds are used in current day operations and are known to be safe	Diminished: A structure of that size in this location would increase complexity for other traffic which could reduce safety	Diminished: A structure of that size in this location would increase complexity for other traffic which could reduce safety
DP1 Operational (Delay Absorption)	B AMS	Optimised concept of current day operation, which provides similar delay absorption	Similar holding capacity as today, plus delay absorption by flying the PM. Overall delay absorption similar to today	Similar holding capacity as today, plus delay absorption by flying the PM. Overall delay absorption similar to today
DP1 Operational (Disruption Recovery)	B AMS	Optimised concept of current day operation, which provides improved disruption recovery	Assumed contingency hold within the transition, net disruption recovery similar to today	Assumed contingency hold within the transition, net disruption recovery similar to today
DP2 Economic (Fuel)	B	Optimised concept aligned with airport traffic flows, therefore improved fuel performance	Worsened due to extended track miles to complete the PM structure. Partially aligns with airport traffic flows. Net worsened	Worsened due to extended track miles to complete the PM structure. Partially aligns with airport traffic flows. Net worsened
DP3 Environmental (CO <sub>2</sub> )	B AMS	Optimised concept of current day operation aligned with airport traffic flows, therefore CO <sub>2</sub> emissions per flight improved	Worsened due to extended track miles to complete the PM structure. Partially aligns with airport traffic flows. Net worsened	Worsened due to extended track miles to complete the PM structure. Partially aligns with airport traffic flows. Net worsened
DP4 Environmental (Noise)	C	Impact on routes (and noise distribution) below 7,000ft not known at this point	Impact on routes (and noise distribution) below 7,000ft not known at this point	Impact on routes (and noise distribution) below 7,000ft not known at this point
DP5 Technical (CAS)	C	A design overhead may require additional CAS, depending on location. Therefore, extent not yet known	A design to the SE may require additional CAS, depending on location. Therefore, extent not yet known	A design to the south may require additional CAS, depending on location. Therefore, extent not yet known
DP6 Technical (Other Users)	C AMS	Potential additional CAS may require changes to other airspace users' activities	Potential additional CAS may require changes to other airspace users' activities	Potential additional CAS may require changes to other airspace users' activities
DP7 Technical (MoD)	C AMS	No military-use areas in the vicinity, therefore, would not require a change to MoD operations	Assumes design would not impact Portsmouth DA Complex. Therefore, no negative impact on current MoD operations	Assumes design would not impact Portsmouth DA Complex. Therefore, no negative impact on current MoD operations
DP8 Operational (Capacity)	B AMS	Aligns with network traffic flows and concept can support the airport required arrival loading	Supports the required airport arrival loading, however, negatively impacts capacity of south and westbound network traffic flows	Supports the required airport arrival loading, however, negatively impacts capacity of south and westbound network traffic flows
DP8 Operational (Efficiency)	B AMS	Similar concept to today's operation, therefore no change in ATCO workload anticipated	Assume additional CAS is agreed if required. Workload likely to be the same as today, as PM structure would be used minimally (due to volume of traffic)	Assume additional CAS is agreed if required. Workload likely to be the same as today, as PM structure would be used minimally (due to volume of traffic)
DP9 Technical (Route Spacing)	B AMS	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes
DP10 Policy (AMS)	A	Green: DP0, DP1, DP3, DP7, DP8, DP9 Amber: DP1, DP6, DP8 Red: None	Green: DP7, DP9 Amber: DP0, DP1, DP1, DP6, DP8, DP8 Red: DP3	Green: DP7, DP9 Amber: DP0, DP1, DP1, DP6, DP8, DP8 Red: DP3

DP	Priority	HI - PM - SW (Maybe shared)	HI - PM - W (Maybe shared)	HI - PM - NW (Maybe shared)
RESULT		<b>REJECT</b>	<b>REJECT</b>	<b>REJECT</b>
DP0 Safety	A AMS	Diminished: A structure of that size in this location would increase complexity for other traffic which could reduce safety	Diminished: A structure of that size in this location would increase complexity for other traffic which could reduce safety	Diminished: A structure of that size in this location would increase complexity for other traffic which could reduce safety
DP1 Operational (Delay Absorption)	B AMS	Similar holding capacity as today, plus delay absorption by flying the PM. Overall delay absorption similar to today	Similar holding capacity as today, plus delay absorption by flying the PM. Overall delay absorption similar to today	Similar holding capacity as today, plus delay absorption by flying the PM. Overall delay absorption similar to today
DP1 Operational (Disruption Recovery)	B AMS	Assumed contingency hold within the transition, net disruption recovery similar to today	Assumed contingency hold within the transition, net disruption recovery similar to today	Assumed contingency hold within the transition, net disruption recovery similar to today
DP2 Economic (Fuel)	B	Worsened due to extended track miles to complete the PM structure. Partially aligns with airport traffic flows. Net worsened	Worsened due to extended track miles to complete the PM structure. Not aligned with airport traffic flows. Net worsened	Worsened due to extended track miles to complete the PM structure. Partially aligns with airport traffic flows. Net worsened
DP3 Environmental (CO <sub>2</sub> )	B AMS	Worsened due to extended track miles to complete the PM structure. Partially aligns with airport traffic flows. Net worsened	Worsened due to extended track miles to complete the PM structure. Not aligned with airport traffic flows. Net worsened	Worsened due to extended track miles to complete the PM structure. Partially aligns with airport traffic flows. Net worsened
DP4 Environmental (Noise)	C	Impact on routes (and noise distribution) below 7,000ft not known at this point	Impact on routes (and noise distribution) below 7,000ft not known at this point	Impact on routes (and noise distribution) below 7,000ft not known at this point
DP5 Technical (CAS)	C	Design would require more CAS than would be needed for alternative orientations	Design would require more CAS than would be needed for alternative orientations	Design would require more CAS than would be needed for alternative orientations
DP6 Technical (Other Users)	C AMS	Additional CAS required, anticipated excessive negative impact	Additional CAS required, anticipated excessive negative impact	Additional CAS required, anticipated excessive negative impact
DP7 Technical (MoD)	C AMS	Assumes design would not impact Lulworth & Portland DA Complex. Therefore, no negative impact on current MoD operations	Assumes design would not impact Salisbury Plain DA Complex. Therefore, no negative impact on current MoD operations	A PM could not be accommodated without significant negative impact to MoD use of Salisbury DA Complex
DP8 Operational (Capacity)	B AMS	Supports the required airport arrival loading, however, negatively impacts capacity of south and westbound network traffic flows	Supports the required airport arrival loading, however, negatively impacts capacity of south and westbound network traffic flows	Aligns with network traffic flows and concept can support the airport required arrival loading
DP8 Operational (Efficiency)	B AMS	Assume additional CAS is agreed if required. Workload likely to be the same as today, as PM structure would be used minimally (due to volume of traffic)	Assume additional CAS is agreed if required. Workload likely to be the same as today, as PM structure would be used minimally (due to volume of traffic)	Assume additional CAS is agreed if required. Workload likely to be the same as today, as PM structure would be used minimally (due to volume of traffic)
DP9 Technical (Route Spacing)	B AMS	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes
DP10 Policy (AMS)	A	Green: DP7, DP9 Amber: DP0, DP1, DP1, DP8, DP8 Red: DP3, DP6	Green: DP7, DP9 Amber: DP0, DP1, DP1, DP8, DP8 Red: DP3, DP6	Green: DP8, DP9 Amber: DP0, DP1, DP1, DP8 Red: DP3, DP6, DP7

DP	Priority	HI - PM - OH (Maybe shared)
RESULT		<b>REJECT</b>
DP0 Safety	A AMS	Diminished: A structure of that size in this location would increase complexity for other traffic which could reduce safety
DP1 Operational (Delay Absorption)	B AMS	Similar holding capacity as today, plus delay absorption by flying the PM. Overall delay absorption similar to today
DP1 Operational (Disruption Recovery)	B AMS	Assumed contingency hold within the transition, net disruption recovery similar to today
DP2 Economic (Fuel)	B	Worsened due to track miles to complete the PM and route to OH then away. Net worsened
DP3 Environmental (CO <sub>2</sub> )	B AMS	Worsened due to track miles to complete the PM and route to OH then away. Net worsened
DP4 Environmental (Noise)	C	Impact on routes (and noise distribution) below 7,000ft not known at this point
DP5 Technical (CAS)	C	A design overhead may require additional CAS, depending on location. Therefore, extent not yet known
DP6 Technical (Other Users)	C AMS	Potential additional CAS may require changes to other airspace users' activities
DP7 Technical (MoD)	C AMS	No military-use areas in the vicinity, therefore, would not require a change to MoD operations
DP8 Operational (Capacity)	B AMS	Supports the required airport arrival loading, however, negatively impacts capacity of south and westbound network traffic flows
DP8 Operational (Efficiency)	B AMS	Assume additional CAS is agreed if required. Workload likely to be the same as today, as PM structure would be used minimally (due to volume of traffic)
DP9 Technical (Route Spacing)	B AMS	Structure will be designed, in collaboration with the airport, to the highest appropriate PBN standard enabling efficient spacing between routes
DP10 Policy (AMS)	A	Green: DP7, DP9 Amber: DP0, DP1, DP1, DP6, DP8, DP8 Red: DP3

**Table 11 Design Principle Evaluation**

3.4.5 'Do Nothing' and 10 design options were assessed as not meeting the DPs and were rejected at this stage. The remaining 5 viable design options progress to Step 2B Options Appraisal.



### 3.5 Initial Options Appraisal

3.5.1 The following viable options have been progressed to IOA:

Southampton Option Concepts progressed to IOA
Inner Holds – North (Maybe shared)
Inner Holds – Southeast (Maybe shared)
Inner Holds – South (Maybe shared)
Inner Holds – Southwest (Maybe shared)
Inner Holds – Overhead (DM) (Maybe shared)

**Table 12 Summary of design options progressed from DPE to IOA**

Table 13 shows the assessment criteria used to complete the initial appraisal of each shortlisted option.

Group	Impact
<b>Communities</b>	Noise impact on health and quality of life
	A qualitative assessment of changes to noise impacts compared with the 'Do Nothing' baseline.
	A qualitative assessment of changes to tranquillity impacts compared with the 'Do Nothing' baseline.
<b>Communities</b>	Air Quality
	A qualitative assessment of changes to local air quality compared with the 'Do Nothing' baseline.
<b>Wider Society</b>	Greenhouse Gas Impacts
	A qualitative assessment of changes to greenhouse gas impacts compared with the 'Do Nothing' baseline.
<b>Wider Society</b>	Capacity / Resilience
	A qualitative assessment of changes to airspace capacity and resilience compared with the 'Do Nothing' baseline.
<b>General Aviation (GA)</b>	Access
	A qualitative assessment of changes to GA access compared with the 'Do Nothing' baseline.
<b>GA/Commercial Airlines</b>	Economic Impact from Increased Effective Capacity
	A qualitative assessment of changes to GA and commercial operator economic impacts from increased effective capacity compared with the 'Do Nothing' baseline.
<b>GA/Commercial Airlines</b>	Fuel Burn
	A qualitative assessment of changes to GA and commercial operator fuel burn impacts compared with the 'Do Nothing' baseline.
<b>Commercial Airlines</b>	Training Costs
	A qualitative assessment of changes to commercial operator training costs compared with the 'Do Nothing' baseline.
<b>Commercial Airlines</b>	Other Costs
	A qualitative assessment of changes to other relevant commercial operator costs compared with the 'Do Nothing' baseline.
<b>Airport / ANSP</b>	Infrastructure Costs
	A qualitative assessment of changes to airport and ANSP infrastructure costs compared with the 'Do Nothing' baseline.
<b>Airport / ANSP</b>	Operational Costs
	A qualitative assessment of changes to airport and ANSP operational costs compared with the 'Do Nothing' baseline.
<b>Airport / ANSP</b>	Deployment Costs
	A qualitative assessment of changes to airport and ANSP deployment costs compared with the 'Do Nothing' baseline.
<b>All</b>	Performance against the vision and parameters/strategic objectives of the AMS
	A qualitative assessment of how the design option performs, considering the AMS objectives of improved capacity, reduced CO <sub>2</sub> , minimal impact on other users, maintaining or enhancing safety, and facilitation of defence and security objectives, compared with the 'Do Nothing' baseline.

**Table 13 Initial Options Appraisal Assessment Criteria**

3.5.2 The baseline 'Do Nothing' is described in Section 2. It did not progress through the DPE however, in line with CAP1616, it must be included in the IOA for comparison purposes. Each option is described in Section 3.3 and Section 5 Appendix 1.

HI – DN (Shared) Qualitative Initial Impacts Assessment		REJECTED
Group	Impact	
<b>Communities</b>	Noise impact on health and quality of life	
	ANG (2017) states “at or above 7,000ft...minimising of noise is no longer a priority”. CAP1616 instructs sponsors to consider noise and tranquillity impacts where the proposal has the potential to change overflight of inhabited areas, AONBs and NPs below 7,000ft.. No change in airspace design – no changes to impacts.	
<b>Communities</b>	Air Quality	
	ANG (2017) states “emissions from aircraft above 1,000ft are unlikely to have a significant impact on local air quality”. No change in airspace design – no changes to impacts.	
<b>Wider Society</b>	Greenhouse Gas Impacts	
	In the short term, there would be no change. In the long term, failure to modernise the airspace would have a negative impact on GHG emissions due to increased likelihood of delays/holding in an unchanged design as traffic is forecast to increase.	
<b>Wider Society</b>	Capacity / Resilience	
	In the short term, there would be no change. In the long term, failure to modernise the airspace would have a negative impact on capacity and resilience due to increased likelihood of delays/holding in an unchanged design as traffic is forecast to increase.	
<b>General Aviation (GA)</b>	Access	
	In the short term, there would be no change in impact. In the long term, failure to modernise the airspace would lead to increased likelihood of commercial aircraft delays and holding in an unchanged design as traffic is forecast to increase. This may lead to negative impacts on GA access due to the busier airspace, however as GA access is currently relatively infrequent at network levels, this may not be a major impact.	
<b>GA/Commercial Airlines</b>	Economic Impact from Increased Effective Capacity	
	In the short term, there would be no change in impact. In the long term, failure to modernise the airspace would have a negative impact on capacity due to increased likelihood of delays/holding in an unchanged design as traffic is forecast to increase. This would lead to a negative economic impact.	
<b>GA/Commercial Airlines</b>	Fuel Burn	
	In the short term, there would be no change in impact. In the long term, failure to modernise the airspace would have a negative impact on fuel burn due to increased likelihood of delays/holding in an unchanged design as traffic is forecast to increase.	
<b>Commercial Airlines</b>	Training Costs	
	Flight procedures change worldwide with each AIRAC cycle and operators would update their procedures accordingly, training staff if required. If this baseline system was retained, the same flight procedures would be used, and training cost impacts would not change.	
<b>Commercial Airlines</b>	Other Costs	
	No change in airspace design – no changes to other commercial operator costs.	
<b>Airport / ANSP</b>	Infrastructure Costs	
	No change in airspace design – no changes to infrastructure costs. If this baseline system was retained, the same infrastructure would continue to be used in the same way, with no additional costs.	
<b>Airport / ANSP</b>	Operational Costs	
	No change in airspace design – no changes to infrastructure costs. If this baseline system was retained, the same infrastructure would continue to be used in the same way, with no additional operational costs.	
<b>Airport / ANSP</b>	Deployment Costs	
	If this baseline system was retained, there would be no deployment, hence no associated costs.	
<b>AMS</b>	Performance against the vision and parameters/strategic objectives of the AMS	
	<ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: worsens delay absorption, disruption recovery, airport capacity, network capacity and ATCO workload. Does not utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA</li> <li>• Environmental sustainability: worsens CO<sub>2</sub> emissions</li> </ul>	
<b>Qualitative Safety Assessment</b>		
	A high-level safety appraisal for this proposed option indicates that if the baseline system was retained, the existing level of safety performance undertaken within the current operation would be at least maintained. However, if there was no change to the current operation the potential increase in traffic as forecast would increase controller workload and traffic complexity within the LTMA leading to potential safety issues in the future. In order to mitigate any reduction in safety margins it is likely that increased flow management measures would be required, resulting in additional delay.	
<b>Conclusion from IOA</b>		
	This option was rejected during the DPE stage. It has been included for comparison purposes only.	

**Table 14 HI-DN Initial Options Appraisal**

HI - IH – N (Maybe shared) Qualitative Initial Impacts Assessment		PROGRESSED
Group	Impact	
<b>Communities</b>	Noise impact on health and quality of life	
	ANG (2017) states “at or above 7,000ft...minimising of noise is no longer a priority”. CAP1616 instructs sponsors to consider noise and tranquillity impacts where the proposal has the potential to change overflight of inhabited areas, AONBs and NPs below 7,000ft. In this network-level proposal, changes would not occur below 7,000ft therefore these impacts are not considered.	
<b>Communities</b>	Air Quality	
	ANG (2017) states “emissions from aircraft above 1,000ft are unlikely to have a significant impact on local air quality”. Changes would occur at or above 7,000ft, thus in accordance with ANG (2017) there would be no change in local air quality impacts.	
<b>Wider Society</b>	Greenhouse Gas Impacts	
	As either an independent or shared facility, an optimised version of today which could reposition the current contingency hold to better align with the traffic flows. However, this location only partially aligns with airport traffic flows. Overall, it could maintain GHG emissions compared with the baseline.	
<b>Wider Society</b>	Capacity / Resilience	
	Capacity: If this is an independent facility, as traffic levels increase, this capacity improvement could reduce the frequency of delays/holding compared with the baseline. If a shared facility, there could be no change to airport capacity compared with the baseline. Other non-airspace constraints may hinder overall capacity and economic gains at Southampton. This location aligns with network traffic flows so could maintain network capacity compared with the baseline. Resilience: If an independent facility, disruption recovery could be improved, if a shared facility this option could maintain disruption recovery resulting from unplanned runway closure. As either an independent or shared facility, this option could maintain a similar number of holding levels, therefore it could maintain delay absorption compared with the baseline.	
<b>General Aviation (GA)</b>	Access	
	As either an independent or shared facility, a holding facility to the north may require additional CAS, the extent is not yet known. As a result, the access impact on GA traffic may be worse compared with the baseline.	
<b>GA/Commercial Airlines</b>	Economic Impact from Increased Effective Capacity	
	As either an independent or shared facility, this option aligns with network traffic flows, which could enable capacity gains across the LTMA from an improved network design. This could positively impact all LTMA traffic – commercial and GA. A shared facility would be similar compared with the baseline. An independent facility could enable airport capacity which could result in an economic benefit over the baseline for commercial traffic. However, other non-airspace constraints may hinder capacity and economic gains at Southampton. An independent facility could create network inefficiencies over the current baseline (shared facility). This is due to the extended track distance or inefficient profiles required by the network traffic, to deconflict from the additional arrival structure, resulting in increased fuel burn. This could have a negative economic impact on other LTMA traffic – commercial and GA.	
<b>GA/Commercial Airlines</b>	Fuel Burn	
	As either an independent or shared facility, an optimised version of today which could reposition the current contingency hold to better align with the traffic flows. However, this location only partially aligns with airport traffic flows. Overall, it could maintain fuel burn for each airport arrival flight compared with the baseline for commercial traffic. An independent facility could create network inefficiencies over the current baseline (shared facility). This is due to the extended track distance or inefficient profiles required by the network traffic, to deconflict from the additional arrival structure, resulting in increased fuel burn. This could have a negative impact on all LTMA traffic – commercial and GA.	
<b>Commercial Airlines</b>	Training Costs	
	Flight procedures change worldwide with each AIRAC cycle and operators would update their procedures accordingly, training staff if required. This option, either shared or independent, is not anticipated to impose additional training cost impacts for operators.	
<b>Commercial Airlines</b>	Other Costs	
	No other operator costs are foreseen, as either an independent or shared facility.	
<b>Airport / ANSP</b>	Infrastructure Costs	
	This design option, either shared or independent, is not expected to change airport or ANSP infrastructure impacts, beyond the initial deployment phase which will require some systems engineering adaptations.	
<b>Airport / ANSP</b>	Operational Costs	
	This design option, either shared or independent, is not expected to change airport or ANSP operational cost impacts.	
<b>Airport / ANSP</b>	Deployment Costs	
	At this stage it is disproportionate to attempt to quantify deployment costs per design option, either an independent or shared. However, a large LTMA system change would involve training a large number of controllers and assistants via the use of various air traffic simulators (including sim prep, management, and staffing), with additional system engineering costs.	

AMS	Performance against the vision and parameters/strategic objectives of the AMS
<p>AMS Assessment – Independent Option</p> <ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: could improve disruption recovery and enable airport capacity. Could maintain delay absorption, network capacity and ATCO workload. Will utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA, subject to constraints of the design</li> <li>• Environmental sustainability: could maintain CO<sub>2</sub> emissions. Could result in network inefficiencies</li> </ul>	<p>AMS Assessment – Shared Option</p> <ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: could maintain disruption recovery, delay absorption, airport capacity, network capacity, and ATCO workload. Will utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA, subject to constraints of the design</li> <li>• Environmental sustainability: could maintain CO<sub>2</sub> emissions</li> </ul>
<p><b>Qualitative Safety Assessment</b></p>	<p>A high-level safety appraisal for this proposed option indicates that an Inner Hold to the north would at least maintain current safety performance. There are multiple holds within current UK airspace which have a proven safety performance. An arrival structure in this location would need to deconflict with Bournemouth arrivals, all Farnborough traffic and Heathrow departures.</p>
<p><b>Conclusion from IOA</b></p>	<p>Compared to the baseline, an independent facility could improve disruption recovery and enable airport capacity. If a shared facility, it could maintain disruption recovery and airport capacity compared with the baseline. As either an independent or shared facility, it would maintain safety and any current MoD access. It could maintain delay absorption, network capacity, and ATCO workload. For either facility, depending on the location, there may be a requirement for additional CAS, which could negatively impact other users.</p> <p><b>Therefore, HI – IH – N (Maybe shared) is progressed to Stage 3 for further development.</b></p>

**Table 15 HI-IH-N (Maybe shared) Initial Options Appraisal**

HI - IH – SE (Maybe shared) Qualitative Initial Impacts Assessment		PROGRESSED
Group	Impact	
<b>Communities</b>	Noise impact on health and quality of life	
	ANG (2017) states “at or above 7,000ft...minimising of noise is no longer a priority”. CAP1616 instructs sponsors to consider noise and tranquillity impacts where the proposal has the potential to change overflight of inhabited areas, AONBs and NPs below 7,000ft. In this network-level proposal, changes would not occur below 7,000ft therefore these impacts are not considered.	
<b>Communities</b>	Air Quality	
	ANG (2017) states “emissions from aircraft above 1,000ft are unlikely to have a significant impact on local air quality”. Changes would occur at or above 7,000ft, thus in accordance with ANG (2017) there would be no change in local air quality impacts.	
<b>Wider Society</b>	Greenhouse Gas Impacts	
	As either an independent or shared facility, this design option is an optimised version of today which may reposition the current contingency hold to better align with the traffic flows. However, this location only partially aligns with airport traffic flows. Overall, it could maintain GHG emissions compared with the baseline.	
<b>Wider Society</b>	Capacity / Resilience	
	Capacity: If this is an independent facility, as traffic levels increase, this capacity improvement could reduce the frequency of delays/holding compared with the baseline. If a shared facility, it could maintain airport capacity compared with the baseline. Other non-airspace constraints may hinder overall capacity and economic gains at Southampton. This location does not align with network traffic flows so could worsen network capacity compared with the baseline. Resilience: If an independent facility, disruption recovery could be improved, if a shared facility this option could maintain disruption recovery resulting from unplanned runway closure. As either an independent or shared facility, this option could maintain a similar number of holding levels, therefore it could maintain delay absorption compared with the baseline.	
<b>General Aviation (GA)</b>	Access	
	As either an independent or shared facility, a holding facility to the southeast may require additional CAS, the extent is not yet known. As a result, the access impact on GA traffic may be worse compared with the baseline.	
<b>GA/Commercial Airlines</b>	Economic Impact from Increased Effective Capacity	
	As either an independent or shared facility, this option does not align with network traffic flows, which hinders potential capacity gains across the LTMA from an improved network design. This could negatively impact all LTMA traffic – commercial and GA. An independent facility could enable airport capacity which could result in an economic benefit over the baseline for commercial traffic. However, other non-airspace constraints may hinder capacity and economic gains at Southampton. An independent facility could create network inefficiencies over the current baseline (shared facility). This is due to the extended track distance or inefficient profiles required by the network traffic, to deconflict from the additional arrival structure, resulting in increased fuel burn. This could have a negative economic impact on other LTMA traffic – commercial and GA.	
<b>GA/Commercial Airlines</b>	Fuel Burn	
	As either an independent or shared facility, this design option is an optimised version of today which may reposition the current contingency hold to better align with the traffic flows. However, this location only partially aligns with airport traffic flows. Overall, it could maintain fuel burn for each airport arrival flight compared with the baseline for commercial traffic. An independent facility could create network inefficiencies over the current baseline (shared facility). This is due to the extended track distance or inefficient profiles required by the network traffic, to deconflict from the additional arrival structure, resulting in increased fuel burn. This could have a negative impact on all LTMA traffic – commercial and GA. Depending on the location, additional CAS maybe required, which may negatively impact fuel burn for transiting GA traffic.	
<b>Commercial Airlines</b>	Training Costs	
	Flight procedures change worldwide with each AIRAC cycle and operators would update their procedures accordingly, training staff if required. This option, either shared or independent, is not anticipated to impose additional training cost impacts for operators.	
<b>Commercial Airlines</b>	Other Costs	
	No other operator costs are foreseen, as either an independent or shared facility.	
<b>Airport / ANSP</b>	Infrastructure Costs	
	This design option, either shared or independent, is not expected to change airport or ANSP infrastructure impacts, beyond the initial deployment phase which will require some systems engineering adaptations.	
<b>Airport / ANSP</b>	Operational Costs	
	This design option, either shared or independent, is not expected to change airport or ANSP operational cost impacts.	
<b>Airport / ANSP</b>	Deployment Costs	
	At this stage it is disproportionate to attempt to quantify deployment costs per design option, either an independent or shared. However, a large LTMA system change would involve training a large number of controllers and assistants via the use of various air traffic simulators (including sim prep, management, and staffing), with additional system engineering costs.	

AMS	Performance against the vision and parameters/strategic objectives of the AMS
<p>AMS Assessment – Independent Option</p> <ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: could improve disruption recovery, enable airport capacity, maintain delay absorption, and maintain ATCO workload. Could worsen network capacity. Will utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA, subject to constraints of the design</li> <li>• Environmental sustainability: could maintain CO<sub>2</sub> emissions. Could result in network inefficiencies</li> </ul> <p>AMS Assessment – Shared Option</p> <ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: could maintain disruption recovery, delay absorption, airport capacity and ATCO workload. Could worsen network capacity. Will utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA, subject to constraints of the design</li> <li>• Environmental sustainability: could maintain CO<sub>2</sub> emissions</li> </ul>	
<b>Qualitative Safety Assessment</b>	
<p>A high-level safety appraisal for this proposed option indicates that an Inner Hold to the southeast would at least maintain current safety performance. There are multiple holds within current UK airspace which have a proven safety performance. An arrival structure in this location would need to deconflict with all Bournemouth and Farnborough traffic and Gatwick departures.</p>	
<b>Conclusion from IOA</b>	
<p>Compared to the baseline, an independent facility could improve disruption recovery and enable airport capacity. If it is a shared facility, it could maintain disruption recovery and airport capacity compared with the baseline. As either an independent or shared facility, it would maintain safety and any current MoD access. It could maintain delay absorption, network capacity, and ATCO workload. For either facility, depending on the location, there may be a requirement for additional CAS, which could negatively impact other users.</p> <p><b>Therefore, HI – IH – SE (Maybe shared) is progressed to Stage 3 for further development.</b></p>	

**Table 16 HI-IH-SE (Maybe shared) Initial Options Appraisal**

HI - IH – S (Maybe shared) Qualitative Initial Impacts Assessment		PROGRESSED
Group	Impact	
<b>Communities</b>	Noise impact on health and quality of life	
	ANG (2017) states “at or above 7,000ft...minimising of noise is no longer a priority”. CAP1616 instructs sponsors to consider noise and tranquillity impacts where the proposal has the potential to change overflight of inhabited areas, AONBs and NPs below 7,000ft. In this network-level proposal, changes would not occur below 7,000ft therefore these impacts are not considered.	
<b>Communities</b>	Air Quality	
	ANG (2017) states “emissions from aircraft above 1,000ft are unlikely to have a significant impact on local air quality”. Changes would occur at or above 7,000ft, thus in accordance with ANG (2017) there would be no change in local air quality impacts.	
<b>Wider Society</b>	Greenhouse Gas Impacts	
	As either an independent or shared facility, this design option is an optimised version of today which may reposition the current contingency hold to better align with the traffic flows. However, this location only partially aligns with airport traffic flows. Overall, it could maintain GHG emissions compared with the baseline.	
<b>Wider Society</b>	Capacity / Resilience	
	Capacity: If this is an independent facility, as traffic levels increase, this capacity improvement could reduce the frequency of delays/holding compared with the baseline. If a shared facility, it could maintain airport capacity compared with the baseline. Other non-airspace constraints may hinder overall capacity and economic gains at Southampton. This location aligns with network traffic flows so could maintain network capacity compared with the baseline. Resilience: If an independent facility, disruption recovery could be improved, if a shared facility this option could maintain disruption recovery resulting from unplanned runway closure. As either an independent or shared facility, this option could maintain a similar number of holding levels, therefore it could maintain delay absorption compared with the baseline.	
<b>General Aviation (GA)</b>	Access	
	As either an independent or shared facility, a holding facility to the south may require additional CAS, the extent is not yet known. As a result, the access impact on GA traffic may be worse compared with the baseline.	
<b>GA/Commercial Airlines</b>	Economic Impact from Increased Effective Capacity	
	As either an independent or shared facility, this option with network traffic flows, which could enable capacity gains across the LTMA from an improved network design. This could positively impact all LTMA traffic – commercial and GA. A shared facility could be similar compared to the baseline. An independent facility could enable airport capacity which could result in an economic benefit over the baseline for commercial traffic. However, other non-airspace constraints may hinder capacity and economic gains at Southampton. An independent facility could create network inefficiencies over the current baseline (shared facility). This is due to the extended track distance or inefficient profiles required by the network traffic, to deconflict from the additional arrival structure, resulting in increased fuel burn. This could have a negative economic impact on other LTMA traffic – commercial and GA.	
<b>GA/Commercial Airlines</b>	Fuel Burn	
	As either an independent or shared facility, this design option is an optimised version of today which may reposition the current contingency hold to better align with the traffic flows. However, this location only partially aligns with airport traffic flows. Overall, it could maintain fuel burn for each airport arrival flight compared with the baseline for commercial traffic. An independent facility could create network inefficiencies over the current baseline (shared facility). This is due to the extended track distance or inefficient profiles required by the network traffic, to deconflict from the additional arrival structure, resulting in increased fuel burn. This could have a negative impact on all LTMA traffic – commercial and GA. Depending on the location, additional CAS maybe required, which may negatively impact fuel burn for transiting GA traffic.	
<b>Commercial Airlines</b>	Training Costs	
	Flight procedures change worldwide with each AIRAC cycle and operators would update their procedures accordingly, training staff if required. This option, either shared or independent, is not anticipated to impose additional training cost impacts for operators.	
<b>Commercial Airlines</b>	Other Costs	
	No other operator costs are foreseen, as either an independent or shared facility.	
<b>Airport / ANSP</b>	Infrastructure Costs	
	This design option, either shared or independent, is not expected to change airport or ANSP infrastructure impacts, beyond the initial deployment phase which will require some systems engineering adaptations.	
<b>Airport / ANSP</b>	Operational Costs	
	This design option, either shared or independent, is not expected to change airport or ANSP operational cost impacts.	
<b>Airport / ANSP</b>	Deployment Costs	
	At this stage it is disproportionate to attempt to quantify deployment costs per design option, either an independent or shared. However, a large LTMA system change would involve training a large number of controllers and assistants via the use of various air traffic simulators (including sim prep, management, and staffing), with additional system engineering costs.	

AMS	Performance against the vision and parameters/strategic objectives of the AMS
<p>AMS Assessment – Independent Option</p> <ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: could improve disruption recovery and enable airport capacity. Could maintain delay absorption, network capacity and ATCO workload. Will utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA, subject to constraints of the design</li> <li>• Environmental sustainability: could maintain CO<sub>2</sub> emissions. Could result in network inefficiencies</li> </ul> <p>AMS Assessment – Shared Option</p> <ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: could maintain disruption recovery, delay absorption, airport capacity, network capacity, and ATCO workload. Will utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA, subject to constraints of the design</li> <li>• Environmental sustainability: could maintain CO<sub>2</sub> emissions</li> </ul>	
<p><b>Qualitative Safety Assessment</b></p>	
<p>A high-level safety appraisal for this proposed option indicates that an Inner Hold to the south would at least maintain current safety performance. There are multiple holds within current UK airspace which have a proven safety performance. An arrival structure in this location would need to deconflict with all Bournemouth traffic.</p>	
<p><b>Conclusion from IOA</b></p>	
<p>Compared to the baseline, an independent facility could improve disruption recovery and enable airport capacity. If it is a shared facility, it could maintain disruption recovery and airport capacity compared with the baseline. As either an independent or shared facility, it would maintain safety and any current MoD access. It could maintain delay absorption, network capacity, and ATCO workload. For either facility, depending on the location, there may be a requirement for additional CAS, which could negatively impact other users.</p> <p><b>Therefore, HI – IH – S (Maybe shared) is progressed to Stage 3 for further development.</b></p>	

**Table 17 HI - IH - S (Maybe shared) Initial Options Appraisal**



HI - IH – SW (Maybe shared) Qualitative Initial Impacts Assessment		PROGRESSED
Group	Impact	
<b>Communities</b>	Noise impact on health and quality of life	
	ANG (2017) states “at or above 7,000ft...minimising of noise is no longer a priority”. CAP1616 instructs sponsors to consider noise and tranquillity impacts where the proposal has the potential to change overflight of inhabited areas, AONBs and NPs below 7,000ft. In this network-level proposal, changes would not occur below 7,000ft therefore these impacts are not considered.	
<b>Communities</b>	Air Quality	
	ANG (2017) states “emissions from aircraft above 1,000ft are unlikely to have a significant impact on local air quality”. Changes would occur at or above 7,000ft, thus in accordance with ANG (2017) there would be no change in local air quality impacts.	
<b>Wider Society</b>	Greenhouse Gas Impacts	
	As either an independent or shared facility, this design option is an optimised Inner Hold which may be positioned to align with the traffic flows. However, this location only partially aligns with airport traffic flows. Overall, it could maintain GHG emissions compared with the baseline.	
<b>Wider Society</b>	Capacity / Resilience	
	Capacity: If this is an independent facility, as traffic levels increase, this capacity improvement could reduce the frequency of delays/holding compared with the baseline. If a shared facility, it could maintain airport capacity compared with the baseline. Other non-airspace constraints may hinder overall capacity and economic gains at Southampton. This location aligns with network traffic flows so could maintain network capacity compared with the baseline. Resilience: If an independent facility, disruption recovery could be improved, if a shared facility this option could maintain disruption recovery resulting from unplanned runway closure. As either an independent or shared facility, this option could maintain a similar number of holding levels, therefore it could maintain delay absorption compared with the baseline.	
<b>General Aviation (GA)</b>	Access	
	As either an independent or shared facility, a holding facility to the southwest may require additional CAS, the extent is not yet known. As a result, the access impact on GA traffic may be worse compared with the baseline.	
<b>GA/Commercial Airlines</b>	Economic Impact from Increased Effective Capacity	
	As either an independent or shared facility, this option aligns with network traffic flows, which could enable capacity gains across the LTMA from an improved network design. This could positively impact all LTMA traffic – commercial and GA. A shared facility could be similar compared to the baseline. An independent facility could enable airport capacity which could result in an economic benefit over the baseline for commercial traffic. However, other non-airspace constraints may hinder capacity and economic gains at Southampton. An independent facility could create network inefficiencies over the current baseline (shared facility). This is due to the extended track distance or inefficient profiles required by the network traffic, to deconflict from the additional arrival structure, resulting in increased fuel burn. This could have a negative economic impact on other LTMA traffic – commercial and GA.	
<b>GA/Commercial Airlines</b>	Fuel Burn	
	As either an independent or shared facility, this design option is an optimised Inner Hold which may be positioned to align with the traffic flows. However, this location only partially aligns with airport traffic flows. Overall, it could maintain fuel burn for each airport arrival flight compared with the baseline for commercial traffic. An independent facility could create network inefficiencies over the current baseline (shared facility). This is due to the extended track distance or inefficient profiles required by the network traffic, to deconflict from the additional arrival structure, resulting in increased fuel burn. This could have a negative impact on all LTMA traffic – commercial and GA. Depending on the location, additional CAS maybe required, which may impact fuel burn for transiting GA traffic.	
<b>Commercial Airlines</b>	Training Costs	
	Flight procedures change worldwide with each AIRAC cycle and operators would update their procedures accordingly, training staff if required. This option, either shared or independent, is not anticipated to impose additional training cost impacts for operators.	
<b>Commercial Airlines</b>	Other Costs	
	No other operator costs are foreseen, as either an independent or shared facility.	
<b>Airport / ANSP</b>	Infrastructure Costs	
	This design option, either shared or independent, is not expected to change airport or ANSP infrastructure impacts, beyond the initial deployment phase which will require some systems engineering adaptations.	
<b>Airport / ANSP</b>	Operational Costs	
	This design option, either shared or independent, is not expected to change airport or ANSP operational cost impacts.	
<b>Airport / ANSP</b>	Deployment Costs	
	At this stage it is disproportionate to attempt to quantify deployment costs per design option, either an independent or shared. However, a large LTMA system change would involve training a large number of controllers and assistants via the use of various air traffic simulators (including sim prep, management, and staffing), with additional system engineering costs.	

AMS	Performance against the vision and parameters/strategic objectives of the AMS
<p>AMS Assessment – Independent Option</p> <ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: could improve disruption recovery and enable airport capacity. Could maintain delay absorption, network capacity and ATCO workload. Will utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA, subject to constraints of the design</li> <li>• Environmental sustainability: could maintain CO<sub>2</sub> emissions. Could result in network inefficiencies</li> </ul> <p>AMS Assessment – Shared Option</p> <ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: could maintain disruption recovery, delay absorption, airport capacity, network capacity, and ATCO workload. Will utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA, subject to constraints of the design</li> <li>• Environmental sustainability: could maintain CO<sub>2</sub> emissions</li> </ul>	
<b>Qualitative Safety Assessment</b>	
<p>A high-level safety appraisal for this proposed option indicates that an Inner Hold to the southwest would at least maintain current safety performance. There are multiple holds within current UK airspace which have a proven safety performance. An arrival structure in this location would need to deconflict with all Bournemouth traffic.</p>	
<b>Conclusion from IOA</b>	
<p>Compared to the baseline, an independent facility could improve disruption recovery and enable airport capacity. If it is a shared facility, it could maintain disruption recovery and airport capacity compared with the baseline. As either an independent or shared facility, it would maintain safety and any current MoD access. It could maintain delay absorption, network capacity, and ATCO workload. For either facility, depending on the location, there may be a requirement for additional CAS, which could impact other users.</p> <p><b>Therefore, HI – IH – SW (Maybe shared) is progressed to Stage 3 for further development.</b></p>	

**Table 18 HI-IH-SW (Maybe shared) Initial Options Appraisal**

HI - IH – OH (DM) (Maybe shared) Qualitative Initial Impacts Assessment		PROGRESSED
Group	Impact	
<b>Communities</b>	Noise impact on health and quality of life	
	ANG (2017) states “at or above 7,000ft...minimising of noise is no longer a priority”. CAP1616 instructs sponsors to consider noise and tranquillity impacts where the proposal has the potential to change overflight of inhabited areas, AONBs and NPs below 7,000ft. In this network-level proposal, changes would not occur below 7,000ft therefore these impacts are not considered.	
<b>Communities</b>	Air Quality	
	ANG (2017) states “emissions from aircraft above 1,000ft are unlikely to have a significant impact on local air quality”. Changes would occur at or above 7,000ft, thus in accordance with ANG (2017) there would be no change in local air quality impacts.	
<b>Wider Society</b>	Greenhouse Gas Impacts	
	As either an independent or shared facility, this design option is an optimised version of today which may reposition the current hold to better align with the traffic flows. This location aligns with airport traffic flows. Overall, it could reduce GHG emissions through improved aircraft trajectories compared with the baseline.	
<b>Wider Society</b>	Capacity / Resilience	
	Capacity: If this is an independent facility, as traffic levels increase, this capacity improvement could reduce the frequency of delays/holding compared with the baseline. If a shared facility, it could maintain airport capacity compared with the baseline. Other non-airspace constraints may hinder overall capacity and economic gains at Southampton. This location aligns with network traffic flows so could maintain network capacity compared with the baseline. Resilience: If an independent facility, disruption recovery could be improved, if a shared facility this option could maintain disruption recovery resulting from unplanned runway closure. As either an independent or shared facility, this option could maintain a similar number of holding levels, therefore it could maintain delay absorption compared with the baseline.	
<b>General Aviation (GA)</b>	Access	
	As either an independent or shared facility, a holding facility overhead the airfield may require additional CAS, the extent is not yet known. As a result, the access impact on GA traffic may be worse compared with the baseline.	
<b>GA/Commercial Airlines</b>	Economic Impact from Increased Effective Capacity	
	As either an independent or shared facility, this option aligns with network traffic flows, which could enable capacity gains across the LTMA from an improved network design. This could positively impact all LTMA traffic – commercial and GA. A shared facility could be similar compared to the baseline. An independent facility could enable airport capacity which could result in an economic benefit over the baseline for commercial traffic. However, other non-airspace constraints may hinder capacity and economic gains at Southampton. An independent facility could create network inefficiencies over the current baseline (shared facility). This is due to the extended track distance or inefficient profiles required by the network traffic, to deconflict from the additional arrival structure, resulting in increased fuel burn. This could have a negative economic impact on other LTMA traffic – commercial and GA.	
<b>GA/Commercial Airlines</b>	Fuel Burn	
	As either an independent or shared facility, this design option is an optimised version of today which may reposition the current hold to better align with traffic flows. This location aligns with airport traffic flows. Overall, it could maintain fuel burn for each airport arrival flight compared with the baseline for commercial traffic. An independent facility could create network inefficiencies over the current baseline (shared facility). This is due to the extended track distance or inefficient profiles required by the network traffic, to deconflict from the additional arrival structure, resulting in increased fuel burn. This could have a negative impact on all LTMA traffic – commercial and GA. Depending on the location, additional CAS maybe required, which may negatively impact fuel burn for transiting GA traffic.	
<b>Commercial Airlines</b>	Training Costs	
	Flight procedures change worldwide with each AIRAC cycle and operators would update their procedures accordingly, training staff if required. This option, either shared or independent, is not anticipated to impose additional training cost impacts for operators.	
<b>Commercial Airlines</b>	Other Costs	
	No other operator costs are foreseen, as either an independent or shared facility.	
<b>Airport / ANSP</b>	Infrastructure Costs	
	This design option, either shared or independent, is not expected to change airport or ANSP infrastructure impacts, beyond the initial deployment phase which will require some systems engineering adaptations.	
<b>Airport / ANSP</b>	Operational Costs	
	This design option, either shared or independent, is not expected to change airport or ANSP operational cost impacts.	
<b>Airport / ANSP</b>	Deployment Costs	
	At this stage it is disproportionate to attempt to quantify deployment costs per design option, either an independent or shared. However, a large LTMA system change would involve training a large number of controllers and assistants via the use of various air traffic simulators (including sim prep, management, and staffing), with additional system engineering costs.	

<b>AMS</b>	Performance against the vision and parameters/strategic objectives of the AMS
AMS Assessment – Independent Option	
<ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: could improve disruption recovery and enable airport capacity. Could maintain delay absorption, network capacity and ATCO workload. Will utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA, subject to constraints of the design</li> <li>• Environmental sustainability: could reduce CO<sub>2</sub> emissions. Could result in network inefficiencies</li> </ul>	
AMS Assessment – Shared Option	
<ul style="list-style-type: none"> <li>• Safety: maintained</li> <li>• Simplification: could maintain disruption recovery, delay absorption, airport capacity, network capacity, and ATCO workload. Will utilise aircraft performance capabilities</li> <li>• Integration of diverse users: continues to integrate defence and security and GA, subject to constraints of the design</li> <li>• Environmental sustainability: could reduce CO<sub>2</sub> emissions</li> </ul>	
<b>Qualitative Safety Assessment</b>	
A high-level safety appraisal for this proposed option indicates that an Inner Hold overhead the airfield would at least maintain current safety performance. There are multiple holds within current UK airspace which have a proven safety performance. An arrival structure in this location would need to deconflict with all Bournemouth traffic.	
<b>Conclusion from IOA</b>	
Compared to the baseline, an independent facility could improve disruption recovery and enable airport capacity. If it is a shared facility, it could maintain disruption recovery and airport capacity compared with the baseline. As either an independent or shared facility, it could improve fuel burn and CO <sub>2</sub> emissions. It would maintain safety and any current MoD access. It could maintain delay absorption, network capacity, and ATCO workload. For either facility, depending on the location, there may be a requirement for additional CAS, which could negatively impact other users. <b>Therefore, HI – IH – OH (DM) (Maybe shared) is progressed to Stage 3 for further development.</b>	

**Table 19 HI-IH-OH (DM) (Maybe shared) Initial Options Appraisal**

#### 4. Step 2B Conclusion and Next Steps

4.1.1 There is not yet enough detailed quantified data to make a statement on preferred option(s). Compromises and trade-offs may be necessary between airports taking part in the FASI regional airspace change. Appropriate quantitative assessments and trade-offs will be carried out as part of Stage 3 to allow a preferred option to be selected prior to consultation.

4.1.2 This table provides a summary of design option concepts for Southampton, showing how the number of design options has changed through the design development stages as described above.

Module	Initial Long List	Comprehensive List	Progress to IOA	Progress to Stage 3
<b>Southampton</b>	15	15	5	5

**Table 20 Count of Design Option Concepts for each module through option development stages**

4.1.3 These shortlisted viable options have been carried forward to Stage 3:

<b>Southampton Option Concepts progressed to Stage 3</b>
Inner Holds – North (Maybe shared)
Inner Holds – Southeast (Maybe shared)
Inner Holds – South (Maybe shared)
Inner Holds – Southwest (Maybe shared)
Inner Holds – Overhead (DM) (Maybe shared)

**Table 21 Summary of design options progressed to Stage 3**

## 5. APPENDIX 1: Arrival Structure Concepts

### 5.1.1 Arrival structure types identified as being viable options for potential airspace designs across the LTMA airports:

Structure	Diagram	Description
<b>Optimised<sup>6</sup> Holds</b>  Illustration of network/airport boundary (indicative c.7,000ft)		A holding pattern is used to delay aircraft from landing, in a vertically separated stack. ATC control entry to, and exit from, the stack; and aircraft are vectored to the runway or may use a transition. Linked with either a traditional Radar Manoeuvring Area (RMA) or Transitions. This design is for holds within c.30nm of the airport.
<b>Holds Further Out</b>  Illustration of network/airport boundary (indicative c.7,000ft)		As above but would typically be higher. This design is for holds c.30nm-60nm from the airport.
<b>Point Merge</b>  Illustration of network/airport boundary (indicative c.7,000ft)		Point Merge (PM) is a systemised method for sequencing arrival flows, allowing controllers to sequence and merge arrivals without vectoring, whilst enabling continuous descent operations and maintaining runway throughput. This design has a fixed location regarding the merge legs and merge point.
<b>Switch Merge</b>  Illustration of network/airport boundary (indicative c.7,000ft)		SM is a concept not currently in UK operation, whereby two separate PM structures exist within a given airspace volume to serve different runway directions for the same airport. The merge legs and merge point (the tip of each triangle) is angled to favour the runway in use, but only one of the merge structures is in operation at any time; they are 'switched' when the runway direction changes. The holds do not change.
<b>Trombone</b>  Illustration of network/airport boundary (indicative c.7,000ft)		A 'snake-like' PBN transition which can be closed (fixed) which aircraft must fly; or open, whereby tactical flexibility is retained with defined short cuts.

Figure 6 Arrival structure concepts (at and above 7,000ft)

<sup>6</sup> See paragraph 2.2.10 of Master document for explanation of 'Optimised'

End of document