



# ***AIRSPACE MODERNISATION AIRSPACE CHANGE PROPOSAL***

## ***STEP 2B INITIAL OPTIONS APPRAISAL***

### ***APPENDIX B***

#### ***PBN ARRIVALS Runway 27R - Part 6***



## Table of Contents


1.	<i>Initial Options Appraisal - Runway 27R - Option Q</i> .....	3
2.	<i>Initial Options Appraisal - Runway 27R - Option R</i> .....	6
3.	<i>Initial Options Appraisal - Runway 27R - Option S</i> .....	9
4.	<i>Initial Options Appraisal - Runway 27R - Option T</i> .....	12
5.	<i>Initial Options Appraisal - Runway 27R - Option U</i> .....	15
6.	<i>Initial Options Appraisal - Runway 27R - Option V</i> .....	18
7.	<i>Initial Options Appraisal - Runway 27R - Option W</i> .....	21
8.	<i>Initial Options Appraisal - Runway 27R - Option X</i> .....	24

All airspace design options in this document are subject to change throughout the airspace change process, as options are matured in detail and refined in accordance with safety requirements, design principles, appraisals and stakeholder engagement and consultation.

## PBN Arrivals – RWY 27R Option Q

### Option Description

This option was developed to address DP10. This option assumes a single PBN arrival track used for all RWY27R arrivals during the 0430-0600 period from ALESO, BEDEK, TOBID, LOGAN & BEGTO.

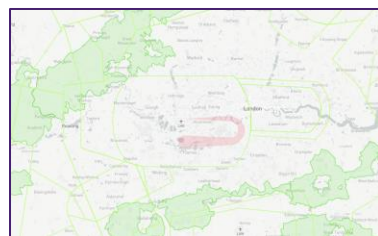

### Communities – Noise impact on health & quality of life

Metric	Option Value	Difference to Baseline
Population above Partial LOAEL (daytime, LA <sub>eq</sub> , 16h)	N/A	N/A
Population above Partial LOAEL (night-time, LA <sub>eq</sub> , 8h)	322,400	-102,700
Population experiencing at least one event of N65 (daytime)	N/A	N/A
Population experiencing at least one event of N60 (night-time)	973,600	-207,900

### Communities - Air Quality

As there is no change to track distribution below 1000ft, there is no effect on Air Quality from this option.

### Wider Society – Greenhouse Gas Impact

Metric	Difference to Baseline
Track Miles of the routes used (nm)	+16

### Wider Society – Tranquillity & Biodiversity

Metric	Option Value	Difference to Baseline
Total Area of AONBs/National Parks (NPs) overflown between 0-7000ft once a day on average (night-time)	0km <sup>2</sup>	No change
Total Area of AONBs/NPs overflown experiencing at least one event of N60 on average (night-time)	0km <sup>2</sup>	No change
Total Area of Richmond Park overflown between 0-7000ft at least once a day on average (night-time)	Less than 1km <sup>2</sup>	Less than 1km <sup>2</sup>
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-1640ft which observe a potential change in location overflown	0	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-3000ft which observe a potential change in location overflown	1	+1

### Wider Society – Capacity/Resilience

Arrival throughput not of concern 0430-0600. A single or multiple PBN route could handle the low number of arrivals in this period if required.

There is no distinguishing difference between any option regards arrival throughput. Any aircraft not RNP-AR equipped would have another PBN route to rely on.

Heathrow's capacity for this ACP is limited by the existing 480,000 movement cap.

### General Aviation – Access

No additional CAS required.

Option would not facilitate the release of CAS.

Option not expected to impact existing helicopter routes.

## General Aviation / Commercial Airlines – Economic impact from increased effective capacity

No economic effect expected on GA operations.

Arrival delay is not an issue during the 0430-0600 period. Use of PBN arrivals during this time would be for noise mitigation purposes only. PBN arrivals in this time will not affect delay performance. There is no distinguishing difference between any option regards arrival delay.

## General Aviation / Commercial Airlines – Fuel Burn

Change in Fuel Burn (compared to the Baseline - annual - tonnes)

Not able to quantify at this time, owing to uncertainty in new stack locations

## Commercial Airlines – Training costs

Option does not require any re-equipage or upgrade costs for airlines. No training costs required for airlines.

## Commercial Airlines – Other costs

None identified.

## Airport/Air Navigation Service Provider (ANSP) – Infrastructure costs

Option may require re-location and/or addition of Noise Monitoring Terminals.

## Airport/ANSP – Operational costs

This option is not anticipated to change airport nor ANSP operational costs. Heathrow will continue to require ILS and other ground based infrastructure even with the implementation of PBN arrival procedures.

Option may lead to a change in the number of properties eligible for the noise insulation scheme) which could lead to a change in operational costs for the airport.

## Airport/ANSP – Deployment costs

There will be considerable costs associated with deployment in terms of operational training and system upgrades which will be quantified in Stage 3. However, there is not expected to be any differences in these costs between the different options.

## Safety

There are already PBN to ILS procedures in the UK. No IFP design issues are anticipated with this option.

Although new or revised safety assurances may be needed, an acceptable safety argument is envisaged to be achievable.

## Adherence to AMS

Supports the AMS through increased systemisation and meeting the Governments key environmental objectives by utilising PBN. The use of PBN arrivals has been appraised at this stage during periods where the landing rate is less critical. PBN arrivals in a system design might enable simplification, safety, efficiency and resilience enhancements and/or provide respite opportunities.

## Interdependencies, Conflicts & Trade-Offs

Option may result in conflicts/interdependencies with Gatwick's options.

## Outcome of PBN Arrival RWY27R Option Q

Option Q reduces the population above the Partial LOAEL (night) and the population experiencing at least one N60 (night) noise event. It indicates no overflight of AONBs or NPs.

The option indicates an increase in track miles and small increases in overflight of Richmond Park. A number of biodiversity sites between 0-3000ft may experience a change in the location overflown. This option will be explored further in Stage 3.

**OPTION CARRIED FORWARD TO STAGE 3**

# CAP1616 - INITIAL OPTIONS APPRAISAL – SUPPLEMENTARY METRICS



23:00 - 07:00

## PBN Arrivals – RWY 27R Option Q (Night)

### Overflight

Rate	Population Overflow		Overflight (0-7000 ft) contour map
	Baseline	Option Q	
≥ 1	673,300	447,300	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

### Aircraft Noise Events

Rate	Population experiencing noise events above N60 each day		N60 events contour map
	Baseline	Option Q	
≥ 1	1,181,500	973,600	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

### Noise Exposures

Population count	Baseline	Option Q	Partial LOAEL contour map
Estimated total population above 40 dB $L_{Aeq,1.5h}$	1,214,800	906,700	
Total population within Partial LOAEL (>45 dB $L_{Aeq,1.5h}$ )	425,100	322,400	

### Noise Exposure Change

Change in Noise Exposure	Population experiencing at least 1 dB reduction within partial LOAEL or brought out of partial LOAEL	Population experiencing no change in noise exposure within partial LOAEL	Population experiencing at least 1 dB increase within partial LOAEL or brought into partial LOAEL	Change in noise exposure map
Partial LOAEL	234,000 (of which 209,700 brought out of Partial LOAEL by Option)	180,800	117,200 (of which 107,000 brought into Partial LOAEL by Option)	



**PBN Arrivals – RWY 27R Option R**

**Option Description**

This option was developed to address DP10. This option assumes a single PBN arrival track used for all RWY27R arrivals capable of RNP-AR during the 0430-0600 period from ALESO, BEDEK, TOBID, LOGAN & BEGTO.



**Communities – Noise impact on health & quality of life**

Metric	Option Value	Difference to Baseline
Population above Partial LOAEL (daytime, LA <sub>eq</sub> , 16h)	N/A	N/A
Population above Partial LOAEL (night-time, LA <sub>eq</sub> , 8h)	189,700	-235,400
Population experiencing at least one event of N65 (daytime)	N/A	N/A
Population experiencing at least one event of N60 (night-time)	405,600	-775,900

**Communities - Air Quality**

As there is no change to track distribution below 1000ft, there is no effect on Air Quality from this option.

**Wider Society – Greenhouse Gas Impact**

Metric	Difference to Baseline
Track Miles of the routes used (nm)	+12

**Wider Society – Tranquillity & Biodiversity**

Metric	Option Value	Difference to Baseline
Total Area of AONBs/National Parks (NPs) overflown between 0-7000ft once a day on average (night-time)	12km <sup>2</sup>	+12km <sup>2</sup>
Total Area of AONBs/NPs overflown experiencing at least one event of N60 on average (night-time)	0km <sup>2</sup>	No change
Total Area of Richmond Park overflown between 0-7000ft at least once a day on average (night-time)	4km <sup>2</sup>	+4km <sup>2</sup>
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-1640ft which observe a potential change in location overflown	0	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-3000ft which observe a potential change in location overflown	3	+3

**Wider Society – Capacity/Resilience**

Arrival throughput not of concern 0430-0600. A single or multiple PBN route could handle the low number of arrivals in this period if required.

There is no distinguishing difference between any option regards arrival throughput. Any aircraft not RNP-AR equipped would have another PBN route to rely on.

Heathrow's capacity for this ACP is limited by the existing 480,000 movement cap.

**General Aviation – Access**

No additional CAS required.

Option would not facilitate the release of CAS.

Option may impact existing helicopter routes, further work is required to understand if there is an impact on route H3.



## General Aviation / Commercial Airlines – Economic impact from increased effective capacity

No economic effect expected on GA operations.

Arrival delay is not an issue during the 0430-0600 period. Use of PBN arrivals during this time would be for noise mitigation purposes only. PBN arrivals in this time will not affect delay performance. There is no distinguishing difference between any option regards arrival delay.

## General Aviation / Commercial Airlines – Fuel Burn

Change in Fuel Burn (compared to the Baseline - annual - tonnes)

Not able to quantify at this time, owing to uncertainty in new stack locations

## Commercial Airlines – Training costs

This option would require RNP-AR capability and approvals. This can come with significant costs for airlines, however, it is unknown at this time whether RNP-AR route options would be progressed in isolation i.e. without other arrival procedures being available. Should an RNP-AR arrival be mandatory, there may be additional costs for some operators. This will be quantified in Stage 3.

## Commercial Airlines – Other costs

None identified.

## Airport/Air Navigation Service Provider (ANSP) – Infrastructure costs

Option may require re-location and/or addition of Noise Monitoring Terminals.

## Airport/ANSP – Operational costs

This option is not anticipated to change airport nor ANSP operational costs. Heathrow will continue to require ILS and other ground based infrastructure even with the implementation of PBN arrival procedures.

Option may lead to a change in the number of properties eligible for the noise insulation scheme) which could lead to a change in operational costs for the airport.

## Airport/ANSP – Deployment costs

There will be considerable costs associated with deployment in terms of operational training and system upgrades which will be quantified in Stage 3. However, there is not expected to be any differences in these costs between the different options.

## Safety

There are no IFP design issues identified with this option however, there are no RNP-AR arrivals published in the UK at this time. Therefore additional considerations may arise through the regulatory approval process.

Although new or revised safety assurances may be needed, an acceptable safety argument is envisaged to be achievable.

## Adherence to AMS

Supports the AMS through increased systemisation and meeting the Governments key environmental objectives by utilising PBN. The use of PBN arrivals has been appraised at this stage during periods where the landing rate is less critical. PBN arrivals in a system design might enable simplification, safety, efficiency and resilience enhancements and/or provide respite opportunities.

## Interdependencies, Conflicts & Trade-Offs

Option may result in conflicts/interdependencies with Gatwick's options.

## Outcome of PBN Arrival RWY27R Option R

Option R significantly reduces the population above the Partial LOAEL (night) and the population experiencing at least one N60 (night) noise event when compared with the Baseline.

The option indicates a small increase in track miles, increases in overflight of AONBs and NPs, and a number of biodiversity sites between 0-3000ft that may experience a change in the location overflown. There is an increase in Richmond Park overflight. This option will be explored further in Stage 3.

**OPTION CARRIED FORWARD TO STAGE 3**



# CAP1616 - INITIAL OPTIONS APPRAISAL – SUPPLEMENTARY METRICS



23:00 - 07:00

## PBN Arrivals – RWY 27R Option R (Night)

### Overflight

Rate	Population Overflow		Overflight (0-7000 ft) contour map
	Baseline	Option R	
≥ 1	673,300	189,000	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

### Aircraft Noise Events

Rate	Population experiencing noise events above N60 each day		N60 events contour map
	Baseline	Option R	
≥ 1	1,181,500	405,600	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

### Noise Exposures

Population count	Baseline	Option R	Partial LOAEL contour map
Estimated total population above 40 dB $L_{Aeq,1.5h}$	1,214,800	399,500	
Total population within Partial LOAEL (>45 dB $L_{Aeq,1.5h}$ )	425,100	189,700	

### Noise Exposure Change

Change in Noise Exposure	Population experiencing at least 1 dB reduction within partial LOAEL or brought out of partial LOAEL	Population experiencing no change in noise exposure within partial LOAEL	Population experiencing at least 1 dB increase within partial LOAEL or brought into partial LOAEL	Change in noise exposure map
Partial LOAEL	125,200 (of which 118,500 brought out of Partial LOAEL by Option)	96,100	87,000 (of which 67,500 brought into Partial LOAEL by Option)	





**PBN Arrivals – RWY 27R Option S**

**Option Description**

This option was developed to address a blend of DPs 2, 4, 9 & 10. This option assumes a single PBN arrival track used for all RWY27R arrivals capable of RNP-AR during the 0430-0600 period from BEDEK & TOBID.



**Communities – Noise impact on health & quality of life**

Metric	Option Value	Difference to Baseline
Population above Partial LOAEL (daytime, LA <sub>eq</sub> , 16h)	N/A	N/A
Population above Partial LOAEL (night-time, LA <sub>eq</sub> , 8h)	245,800	-179,300
Population experiencing at least one event of N65 (daytime)	N/A	N/A
Population experiencing at least one event of N60 (night-time)	600,200	-581,300

**Communities - Air Quality**

As there is no change to track distribution below 1000ft, there is no effect on Air Quality from this option.

**Wider Society – Greenhouse Gas Impact**

Metric	Difference to Baseline
Track Miles of the routes used (nm)	-32

**Wider Society – Tranquillity & Biodiversity**

Metric	Option Value	Difference to Baseline
Total Area of AONBs/National Parks (NPs) overflown between 0-7000ft once a day on average (night-time)	56km <sup>2</sup>	+56km <sup>2</sup>
Total Area of AONBs/NPs overflown experiencing at least one event of N60 on average (night-time)	1km <sup>2</sup>	+1km <sup>2</sup>
Total Area of Richmond Park overflown between 0-7000ft at least once a day on average (night-time)	0km <sup>2</sup>	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-1640ft which observe a potential change in location overflown	0	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-3000ft which observe a potential change in location overflown	0	No change

**Wider Society – Capacity/Resilience**

Arrival throughput not of concern 0430-0600. A single or multiple PBN route could handle the low number of arrivals in this period if required.

There is no distinguishing difference between any option regards arrival throughput. Any aircraft not RNP-AR equipped would have another PBN route to rely on.

Heathrow's capacity for this ACP is limited by the existing 480,000 movement cap.

**General Aviation – Access**

No additional CAS required.

Option would not facilitate the release of CAS.

Option may impact existing helicopter routes, further work is required to understand if there is an impact on route H10.

## General Aviation / Commercial Airlines – Economic impact from increased effective capacity

No economic effect expected on GA operations.

Arrival delay is not an issue during the 0430-0600 period. Use of PBN arrivals during this time would be for noise mitigation purposes only. PBN arrivals in this time will not affect delay performance. There is no distinguishing difference between any option regards arrival delay.

## General Aviation / Commercial Airlines – Fuel Burn

Change in Fuel Burn (compared to the Baseline - annual - tonnes)

Not able to quantify at this time, owing to uncertainty in new stack locations

## Commercial Airlines – Training costs

This option would require RNP-AR capability and approvals. This can come with significant costs for airlines, however, it is unknown at this time whether RNP-AR route options would be progressed in isolation i.e. without other arrival procedures being available. Should an RNP-AR arrival be mandatory, there may be additional costs for some operators. This will be quantified in Stage 3.

## Commercial Airlines – Other costs

None identified.

## Airport/Air Navigation Service Provider (ANSP) – Infrastructure costs

Option may require re-location and/or addition of Noise Monitoring Terminals.

## Airport/ANSP – Operational costs

This option is not anticipated to change airport nor ANSP operational costs. Heathrow will continue to require ILS and other ground based infrastructure even with the implementation of PBN arrival procedures.

Option may lead to a change in the number of properties eligible for the noise insulation scheme) which could lead to a change in operational costs for the airport.

## Airport/ANSP – Deployment costs

There will be considerable costs associated with deployment in terms of operational training and system upgrades which will be quantified in Stage 3. However, there is not expected to be any differences in these costs between the different options.

## Safety

There are no IFP design issues identified with this option however, there are no RNP-AR arrivals published in the UK at this time. Therefore additional considerations may arise through the regulatory approval process.

Although new or revised safety assurances may be needed, an acceptable safety argument is envisaged to be achievable.

## Adherence to AMS

Supports the AMS through increased systemisation and meeting the Governments key environmental objectives by utilising PBN. The use of PBN arrivals has been appraised at this stage during periods where the landing rate is less critical. PBN arrivals in a system design might enable simplification, safety, efficiency and resilience enhancements and/or provide respite opportunities.

## Interdependencies, Conflicts & Trade-Offs

Option not expected to interact with other airports' options.

## Outcome of PBN Arrival RWY27R Option S

Option S significantly reduces the population above the Partial LOAEL (night), the population experiencing at least one N60 (night) noise event and the track miles. It indicates no overflight of Richmond Park and that no biodiversity sites between 0-3000ft should experience a change in location overflown.

The option indicates an increase in AONB and NP overflight. This option will be explored further in Stage 3.

**OPTION CARRIED FORWARD TO STAGE 3**

### PBN Arrivals – RWY 27R Option S (Night)



23:00 - 07:00

#### Overflight

Rate	Population Overflow		Overflight (0-7000 ft) contour map
	Baseline	Option S	
≥ 1	673,300	282,900	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

#### Aircraft Noise Events

Rate	Population experiencing noise events above N60 each day		N60 events contour map
	Baseline	Option S	
≥ 1	1,181,500	600,200	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

#### Noise Exposures

Population count	Baseline	Option S	Partial LOAEL contour map
Estimated total population above 40 dB $L_{Aeq,1.5h}$	1,214,800	570,100	
Total population within Partial LOAEL (>45 dB $L_{Aeq,1.5h}$ )	425,100	245,800	

#### Noise Exposure Change

Change in Noise Exposure	Population experiencing at least 1 dB reduction within partial LOAEL or brought out of partial LOAEL	Population experiencing no change in noise exposure within partial LOAEL	Population experiencing at least 1 dB increase within partial LOAEL or brought into partial LOAEL	Change in noise exposure map
Partial LOAEL	106,800 (of which 90,500 brought out of Partial LOAEL by Option)	80,400	149,100 (of which 118,300 brought into Partial LOAEL by Option)	



## PBN Arrivals – RWY 27R Option T

### Option Description

This option was developed to address a blend of DPs 2, 4, 9 & 10. This option assumes a single PBN arrival track used for all RWY27R arrivals capable of RNP-AR during the 0430-0600 period from BEGTO.



### Communities – Noise impact on health & quality of life

Metric	Option Value	Difference to Baseline
Population above Partial LOAEL (daytime, LA <sub>eq</sub> , 16h)	N/A	N/A
Population above Partial LOAEL (night-time, LA <sub>eq</sub> , 8h)	220,000	-205,100
Population experiencing at least one event of N65 (daytime)	N/A	N/A
Population experiencing at least one event of N60 (night-time)	501,300	-680,200

### Communities - Air Quality

As there is no change to track distribution below 1000ft, there is no effect on Air Quality from this option.

### Wider Society – Greenhouse Gas Impact

Metric	Difference to Baseline
Track Miles of the routes used (nm)	-20

### Wider Society – Tranquillity & Biodiversity

Metric	Option Value	Difference to Baseline
Total Area of AONBs/National Parks (NPs) overflown between 0-7000ft once a day on average (night-time)	39km <sup>2</sup>	+39km <sup>2</sup>
Total Area of AONBs/NPs overflown experiencing at least one event of N60 on average (night-time)	Less than 1km <sup>2</sup>	Less than 1km <sup>2</sup>
Total Area of Richmond Park overflown between 0-7000ft at least once a day on average (night-time)	1km <sup>2</sup>	+1km <sup>2</sup>
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-1640ft which observe a potential change in location overflown	0	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-3000ft which observe a potential change in location overflown	5	+5

### Wider Society – Capacity/Resilience

Arrival throughput not of concern 0430-0600. A single or multiple PBN route could handle the low number of arrivals in this period if required.

There is no distinguishing difference between any option regards arrival throughput. Any aircraft not RNP-AR equipped would have another PBN route to rely on.

Heathrow's capacity for this ACP is limited by the existing 480,000 movement cap.

### General Aviation – Access

No additional CAS required.

Option would not facilitate the release of CAS.

Option may impact existing helicopter routes, further work is required to understand if there is an impact on route H3/H7.

## General Aviation / Commercial Airlines – Economic impact from increased effective capacity

No economic effect expected on GA operations.

Arrival delay is not an issue during the 0430-0600 period. Use of PBN arrivals during this time would be for noise mitigation purposes only. PBN arrivals in this time will not affect delay performance. There is no distinguishing difference between any option regards arrival delay.

## General Aviation / Commercial Airlines – Fuel Burn

Change in Fuel Burn (compared to the Baseline - annual - tonnes)

Not able to quantify at this time, owing to uncertainty in new stack locations

## Commercial Airlines – Training costs

This option would require RNP-AR capability and approvals. This can come with significant costs for airlines, however, it is unknown at this time whether RNP-AR route options would be progressed in isolation i.e. without other arrival procedures being available. Should an RNP-AR arrival be mandatory, there may be additional costs for some operators. This will be quantified in Stage 3.

## Commercial Airlines – Other costs

None identified.

## Airport/Air Navigation Service Provider (ANSP) – Infrastructure costs

Option may require re-location and/or addition of Noise Monitoring Terminals.

## Airport/ANSP – Operational costs

This option is not anticipated to change airport nor ANSP operational costs. Heathrow will continue to require ILS and other ground based infrastructure even with the implementation of PBN arrival procedures.

Option may lead to a change in the number of properties eligible for the noise insulation scheme) which could lead to a change in operational costs for the airport.

## Airport/ANSP – Deployment costs

There will be considerable costs associated with deployment in terms of operational training and system upgrades which will be quantified in Stage 3. However, there is not expected to be any differences in these costs between the different options.

## Safety

There are no IFP design issues identified with this option however, there are no RNP-AR arrivals published in the UK at this time. Therefore additional considerations may arise through the regulatory approval process.

Although new or revised safety assurances may be needed, an acceptable safety argument is envisaged to be achievable.

## Adherence to AMS

Supports the AMS through increased systemisation and meeting the Governments key environmental objectives by utilising PBN. The use of PBN arrivals has been appraised at this stage during periods where the landing rate is less critical. PBN arrivals in a system design might enable simplification, safety, efficiency and resilience enhancements and/or provide respite opportunities.

## Interdependencies, Conflicts & Trade-Offs

Option may result in conflicts/interdependencies with Gatwick's options.

## Outcome of PBN Arrival RWY27R Option T

Option T significantly reduces the population above the Partial LOAEL (night), the population experiencing at least one N60 (night) noise event and the track miles when compared with the Baseline.

The option indicates a small increase in Richmond Park overflight, an increase in AONB and NP overflight and a significant number of biodiversity sites between 0-3000ft that may experience a change in location overflow. This option will be explored further in Stage 3.

## OPTION CARRIED FORWARD TO STAGE 3



### PBN Arrivals – RWY 27R Option T (Night)



23:00 - 07:00

#### Overflight

Rate	Population Overflow		Overflight (0-7000 ft) contour map
	Baseline	Option T	
≥ 1	673,300	226,200	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

#### Aircraft Noise Events

Rate	Population experiencing noise events above N60 each day		N60 events contour map
	Baseline	Option T	
≥ 1	1,181,500	501,300	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

#### Noise Exposures

Population count	Baseline	Option T	Partial LOAEL contour map
Estimated total population above 40 dB $L_{Aeq,1.5h}$	1,214,800	497,300	
Total population within Partial LOAEL (>45 dB $L_{Aeq,1.5h}$ )	425,100	220,000	

#### Noise Exposure Change

Change in Noise Exposure	Population experiencing at least 1 dB reduction within partial LOAEL or brought out of partial LOAEL	Population experiencing no change in noise exposure within partial LOAEL	Population experiencing at least 1 dB increase within partial LOAEL or brought into partial LOAEL	Change in noise exposure map
Partial LOAEL	200,500 (of which 189,700 brought out of Partial LOAEL by Option)	108,700	100,500 (of which 81,500 brought into Partial LOAEL by Option)	



**PBN Arrivals – RWY 27R Option U**

**Option Description**

This option was developed to address a blend of DPs 2, 4, 9 & 10. This option assumes a single PBN arrival track used for all RWY27R arrivals during the 0430-0600 period from BEDEK, TOBID & BEGTO.



**Communities – Noise impact on health & quality of life**

Metric	Option Value	Difference to Baseline
Population above Partial LOAEL (daytime, LA <sub>eq</sub> , 16h)	N/A	N/A
Population above Partial LOAEL (night-time, LA <sub>eq</sub> , 8h)	322,500	-102,600
Population experiencing at least one event of N65 (daytime)	N/A	N/A
Population experiencing at least one event of N60 (night-time)	904,900	-276,600

**Communities - Air Quality**

As there is no change to track distribution below 1000ft, there is no effect on Air Quality from this option.

**Wider Society – Greenhouse Gas Impact**

Metric	Difference to Baseline
Track Miles of the routes used (nm)	-18

**Wider Society – Tranquillity & Biodiversity**

Metric	Option Value	Difference to Baseline
Total Area of AONBs/National Parks (NPs) overflown between 0-7000ft once a day on average (night-time)	33km <sup>2</sup>	+33km <sup>2</sup>
Total Area of AONBs/NPs overflown experiencing at least one event of N60 on average (night-time)	0km <sup>2</sup>	No change
Total Area of Richmond Park overflown between 0-7000ft at least once a day on average (night-time)	0km <sup>2</sup>	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-1640ft which observe a potential change in location overflown	0	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-3000ft which observe a potential change in location overflown	1	+1

**Wider Society – Capacity/Resilience**

Arrival throughput not of concern 0430-0600. A single or multiple PBN route could handle the low number of arrivals in this period if required.

There is no distinguishing difference between any option regards arrival throughput. Any aircraft not RNP-AR equipped would have another PBN route to rely on.

Heathrow's capacity for this ACP is limited by the existing 480,000 movement cap.

**General Aviation – Access**

No additional CAS required.

Option would not facilitate the release of CAS.

Option not expected to impact existing helicopter routes.

## General Aviation / Commercial Airlines – Economic impact from increased effective capacity

No economic effect expected on GA operations.

Arrival delay is not an issue during the 0430-0600 period. Use of PBN arrivals during this time would be for noise mitigation purposes only. PBN arrivals in this time will not affect delay performance. There is no distinguishing difference between any option regards arrival delay.

## General Aviation / Commercial Airlines – Fuel Burn

Change in Fuel Burn (compared to the Baseline - annual - tonnes)

Not able to quantify at this time, owing to uncertainty in new stack locations

## Commercial Airlines – Training costs

Option does not require any re-equipage or upgrade costs for airlines. No training costs required for airlines.

## Commercial Airlines – Other costs

None identified.

## Airport/Air Navigation Service Provider (ANSP) – Infrastructure costs

Option may require re-location and/or addition of Noise Monitoring Terminals.

## Airport/ANSP – Operational costs

This option is not anticipated to change airport nor ANSP operational costs. Heathrow will continue to require ILS and other ground based infrastructure even with the implementation of PBN arrival procedures.

Option may lead to a change in the number of properties eligible for the noise insulation scheme) which could lead to a change in operational costs for the airport.

## Airport/ANSP – Deployment costs

There will be considerable costs associated with deployment in terms of operational training and system upgrades which will be quantified in Stage 3. However, there is not expected to be any differences in these costs between the different options.

## Safety

There are already PBN to ILS procedures in the UK. No IFP design issues are anticipated with this option.

Although new or revised safety assurances may be needed, an acceptable safety argument is envisaged to be achievable.

## Adherence to AMS

Supports the AMS through increased systemisation and meeting the Governments key environmental objectives by utilising PBN. The use of PBN arrivals has been appraised at this stage during periods where the landing rate is less critical. PBN arrivals in a system design might enable simplification, safety, efficiency and resilience enhancements and/or provide respite opportunities.

## Interdependencies, Conflicts & Trade-Offs

Option may result in conflicts/interdependencies with Gatwick's options.

## Outcome of PBN Arrival RWY27R Option U

Option U reduces the population above the Partial LOAEL (night), the population experiencing at least one N60 (night) noise event and the track miles when compared with the Baseline. It indicates no overflight of Richmond Park.

The option indicates a small number of biodiversity sites between 0-3000ft that may experience a change in location overflown and an increase in overflight of AONBs and NPs. This option will be explored further in Stage 3.

## OPTION CARRIED FORWARD TO STAGE 3



### PBN Arrivals – RWY 27R Option U (Night)



23:00 - 07:00

#### Overflight

Rate	Population Overflow		Overflight (0-7000 ft) contour map
	Baseline	Option U	
≥ 1	673,300	486,500	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

#### Aircraft Noise Events

Rate	Population experiencing noise events above N60 each day		N60 events contour map
	Baseline	Option U	
≥ 1	1,181,500	904,900	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

#### Noise Exposures

Population count	Baseline	Option U	Partial LOAEL contour map
Estimated total population above 40 dB $L_{Aeq,1.5h}$	1,214,800	846,100	
Total population within Partial LOAEL (>45 dB $L_{Aeq,1.5h}$ )	425,100	322,500	

#### Noise Exposure Change


Change in Noise Exposure	Population experiencing at least 1 dB reduction within partial LOAEL or brought out of partial LOAEL	Population experiencing no change in noise exposure within partial LOAEL	Population experiencing at least 1 dB increase within partial LOAEL or brought into partial LOAEL	Change in noise exposure map
Partial LOAEL	234,300 (of which 210,000 brought out of Partial LOAEL by Option)	180,600	117,600 (of which 107,400 brought into Partial LOAEL by Option)	



**PBN Arrivals – RWY 27R Option V**

**Option Description**

This option was developed to address a blend of DPs 2, 4, 9 & 10. This option assumes a single PBN arrival track used for all RWY27R arrivals capable of RNP-AR during the 0430-0600 period from ALESO.

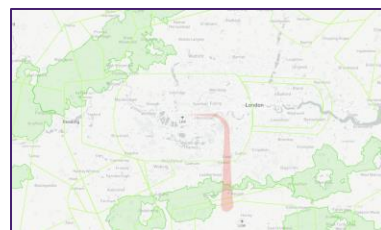

**Communities – Noise impact on health & quality of life**

Metric	Option Value	Difference to Baseline
Population above Partial LOAEL (daytime, LA <sub>eq</sub> , 16h)	N/A	N/A
Population above Partial LOAEL (night-time, LA <sub>eq</sub> , 8h)	212,700	-212,400
Population experiencing at least one event of N65 (daytime)	N/A	N/A
Population experiencing at least one event of N60 (night-time)	469,600	-711,900

**Communities - Air Quality**

As there is no change to track distribution below 1000ft, there is no effect on Air Quality from this option.

**Wider Society – Greenhouse Gas Impact**

Metric	Difference to Baseline
Track Miles of the routes used (nm)	+1

**Wider Society – Tranquillity & Biodiversity**

Metric	Option Value	Difference to Baseline
Total Area of AONBs/National Parks (NPs) overflown between 0-7000ft once a day on average (night-time)	23km <sup>2</sup>	+23km <sup>2</sup>
Total Area of AONBs/NPs overflown experiencing at least one event of N60 on average (night-time)	7km <sup>2</sup>	+7km <sup>2</sup>
Total Area of Richmond Park overflown between 0-7000ft at least once a day on average (night-time)	3km <sup>2</sup>	+3km <sup>2</sup>
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-1640ft which observe a potential change in location overflown	0	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-3000ft which observe a potential change in location overflown	5	+5

**Wider Society – Capacity/Resilience**

Arrival throughput not of concern 0430-0600. A single or multiple PBN route could handle the low number of arrivals in this period if required.

There is no distinguishing difference between any option regards arrival throughput. Any aircraft not RNP-AR equipped would have another PBN route to rely on.

Heathrow's capacity for this ACP is limited by the existing 480,000 movement cap.

**General Aviation – Access**

No additional CAS required.

Option would not facilitate the release of CAS.

Option may impact existing helicopter routes, further work is required to understand if there is an impact on route H3/H7.

## General Aviation / Commercial Airlines – Economic impact from increased effective capacity

No economic effect expected on GA operations.

Arrival delay is not an issue during the 0430-0600 period. Use of PBN arrivals during this time would be for noise mitigation purposes only. PBN arrivals in this time will not affect delay performance. There is no distinguishing difference between any option regards arrival delay.

## General Aviation / Commercial Airlines – Fuel Burn

Change in Fuel Burn (compared to the Baseline - annual - tonnes)

Not able to quantify at this time, owing to uncertainty in new stack locations

## Commercial Airlines – Training costs

This option would require RNP-AR capability and approvals. This can come with significant costs for airlines, however, it is unknown at this time whether RNP-AR route options would be progressed in isolation i.e. without other arrival procedures being available. Should an RNP-AR arrival be mandatory, there may be additional costs for some operators. This will be quantified in Stage 3.

## Commercial Airlines – Other costs

None identified.

## Airport/Air Navigation Service Provider (ANSP) – Infrastructure costs

Option may require re-location and/or addition of Noise Monitoring Terminals.

## Airport/ANSP – Operational costs

This option is not anticipated to change airport nor ANSP operational costs. Heathrow will continue to require ILS and other ground based infrastructure even with the implementation of PBN arrival procedures.

Option may lead to a change in the number of properties eligible for the noise insulation scheme) which could lead to a change in operational costs for the airport.

## Airport/ANSP – Deployment costs

There will be considerable costs associated with deployment in terms of operational training and system upgrades which will be quantified in Stage 3. However, there is not expected to be any differences in these costs between the different options.

## Safety

There are no IFP design issues identified with this option however, there are no RNP-AR arrivals published in the UK at this time. Therefore additional considerations may arise through the regulatory approval process.

Although new or revised safety assurances may be needed, an acceptable safety argument is envisaged to be achievable.

## Adherence to AMS

Supports the AMS through increased systemisation and meeting the Governments key environmental objectives by utilising PBN. The use of PBN arrivals has been appraised at this stage during periods where the landing rate is less critical. PBN arrivals in a system design might enable simplification, safety, efficiency and resilience enhancements and/or provide respite opportunities.

## Interdependencies, Conflicts & Trade-Offs

Option may result in conflicts/interdependencies with Gatwick's options.

## Outcome of PBN Arrival RWY27R Option V

Option V significantly reduces the population above the Partial LOAEL (night) and the population experiencing at least one N60 (night) noise event when compared with the Baseline.

The option indicates a negligible increase in track miles and an increase in overflight of AONBs, NPs and Richmond Park. A number of biodiversity sites between 0-3000ft may experience a change in location overflow. This option will be explored further in Stage 3.

**OPTION CARRIED FORWARD TO STAGE 3**



# CAP1616 - INITIAL OPTIONS APPRAISAL – SUPPLEMENTARY METRICS



23:00 - 07:00

## PBN Arrivals – RWY 27R Option V (Night)

### Overflight

Rate	Population Overflow		Overflight (0-7000 ft) contour map
	Baseline	Option V	
≥ 1	673,300	189,900	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

### Aircraft Noise Events

Rate	Population experiencing noise events above N60 each day		N60 events contour map
	Baseline	Option V	
≥ 1	1,181,500	469,600	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

### Noise Exposures

Population count	Baseline	Option V	Partial LOAEL contour map
Estimated total population above 40 dB $L_{Aeq,1.5h}$	1,214,800	465,600	
Total population within Partial LOAEL (>45 dB $L_{Aeq,1.5h}$ )	425,100	212,700	

### Noise Exposure Change

Change in Noise Exposure	Population experiencing at least 1 dB reduction within partial LOAEL or brought out of partial LOAEL	Population experiencing no change in noise exposure within partial LOAEL	Population experiencing at least 1 dB increase within partial LOAEL or brought into partial LOAEL	Change in noise exposure map
Partial LOAEL	191,200 (of which 181,300 brought out of Partial LOAEL by Option)	103,600	99,200 (of which 88,400 brought into Partial LOAEL by Option)	



**PBN Arrivals – RWY 27R Option W**

**Option Description**

This option was developed to address a blend of DPs 2, 4, 9 & 10. This option assumes a single PBN arrival track used for all RWY27R arrivals during the 0430-0600 period from ALESO & LOGAN.



**Communities – Noise impact on health & quality of life**

Metric	Option Value	Difference to Baseline
Population above Partial LOAEL (daytime, LA <sub>eq</sub> , 16h)	N/A	N/A
Population above Partial LOAEL (night-time, LA <sub>eq</sub> , 8h)	365,500	-59,600
Population experiencing at least one event of N65 (daytime)	N/A	N/A
Population experiencing at least one event of N60 (night-time)	1,051,600	-129,900

**Communities - Air Quality**

As there is no change to track distribution below 1000ft, there is no effect on Air Quality from this option.

**Wider Society – Greenhouse Gas Impact**

Metric	Difference to Baseline
Track Miles of the routes used (nm)	-1

**Wider Society – Tranquillity & Biodiversity**

Metric	Option Value	Difference to Baseline
Total Area of AONBs/National Parks (NPs) overflown between 0-7000ft once a day on average (night-time)	51km <sup>2</sup>	+51km <sup>2</sup>
Total Area of AONBs/NPs overflown experiencing at least one event of N60 on average (night-time)	0km <sup>2</sup>	No change
Total Area of Richmond Park overflown between 0-7000ft at least once a day on average (night-time)	0km <sup>2</sup>	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-1640ft which observe a potential change in location overflown	0	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-3000ft which observe a potential change in location overflown	1	+1

**Wider Society – Capacity/Resilience**

Arrival throughput not of concern 0430-0600. A single or multiple PBN route could handle the low number of arrivals in this period if required.

There is no distinguishing difference between any option regards arrival throughput. Any aircraft not RNP-AR equipped would have another PBN route to rely on.

Heathrow's capacity for this ACP is limited by the existing 480,000 movement cap.

**General Aviation – Access**

No additional CAS required.

Option would not facilitate the release of CAS.

Option not expected to impact existing helicopter routes.



## General Aviation / Commercial Airlines – Economic impact from increased effective capacity

No economic effect expected on GA operations.

Arrival delay is not an issue during the 0430-0600 period. Use of PBN arrivals during this time would be for noise mitigation purposes only. PBN arrivals in this time will not affect delay performance. There is no distinguishing difference between any option regards arrival delay.

## General Aviation / Commercial Airlines – Fuel Burn

Change in Fuel Burn (compared to the Baseline - annual - tonnes)

Not able to quantify at this time, owing to uncertainty in new stack locations

## Commercial Airlines – Training costs

Option does not require any re-equipage or upgrade costs for airlines. No training costs required for airlines.

## Commercial Airlines – Other costs

None identified.

## Airport/Air Navigation Service Provider (ANSP) – Infrastructure costs

Option may require re-location and/or addition of Noise Monitoring Terminals.

## Airport/ANSP – Operational costs

This option is not anticipated to change airport nor ANSP operational costs. Heathrow will continue to require ILS and other ground based infrastructure even with the implementation of PBN arrival procedures.

Option may lead to a change in the number of properties eligible for the noise insulation scheme) which could lead to a change in operational costs for the airport.

## Airport/ANSP – Deployment costs

There will be considerable costs associated with deployment in terms of operational training and system upgrades which will be quantified in Stage 3. However, there is not expected to be any differences in these costs between the different options.

## Safety

There are already PBN to ILS procedures in the UK. No IFP design issues are anticipated with this option.

Although new or revised safety assurances may be needed, an acceptable safety argument is envisaged to be achievable.

## Adherence to AMS

Supports the AMS through increased systemisation and meeting the Governments key environmental objectives by utilising PBN. The use of PBN arrivals has been appraised at this stage during periods where the landing rate is less critical. PBN arrivals in a system design might enable simplification, safety, efficiency and resilience enhancements and/or provide respite opportunities.

## Interdependencies, Conflicts & Trade-Offs

Option may result in conflicts/interdependencies with Gatwick's options.

## Outcome of PBN Arrival RWY27R Option W

Option W reduces the population above the Partial LOAEL (night) and the population experiencing at least one N60 (night) noise event when compared with the Baseline. It indicates no overflight of Richmond Park and there is a negligible decrease in track miles.

The option indicates a small number of biodiversity sites between 0-3000ft that may experience a change in the location overflowed and an increase in overflight of AONBs and NPs. This option will be explored further in Stage 3.

**OPTION CARRIED FORWARD TO STAGE 3**

# CAP1616 - INITIAL OPTIONS APPRAISAL – SUPPLEMENTARY METRICS



23:00 - 07:00

## PBN Arrivals – RWY 27R Option W (Night)

### Overflight

Rate	Population Overflow		Overflight (0-7000 ft) contour map
	Baseline	Option W	
≥ 1	673,300	506,000	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

### Aircraft Noise Events

Rate	Population experiencing noise events above N60 each day		N60 events contour map
	Baseline	Option W	
≥ 1	1,181,500	1,051,600	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

### Noise Exposures

Population count	Baseline	Option W	Partial LOAEL contour map
Estimated total population above 40 dB $L_{Aeq,1.5h}$	1,214,800	1,043,100	
Total population within Partial LOAEL (>45 dB $L_{Aeq,1.5h}$ )	425,100	365,500	

### Noise Exposure Change


Change in Noise Exposure	Population experiencing at least 1 dB reduction within partial LOAEL or brought out of partial LOAEL	Population experiencing no change in noise exposure within partial LOAEL	Population experiencing at least 1 dB increase within partial LOAEL or brought into partial LOAEL	Change in noise exposure map
Partial LOAEL	117,000 (of which 110,700 brought out of Partial LOAEL by Option)	308,000	51,200 (of which 51,100 brought into Partial LOAEL by Option)	



**PBN Arrivals – RWY 27R Option X**

**Option Description**

This option was developed to address a blend of DPs 2, 4, 9 & 10. This option assumes a single PBN arrival track used for all RWY27R arrivals capable of RNP-AR during the 0430-0600 period from LOGAN.

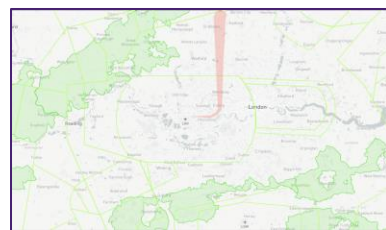

**Communities – Noise impact on health & quality of life**

Metric	Option Value	Difference to Baseline
Population above Partial LOAEL (daytime, LA <sub>eq</sub> , 16h)	N/A	N/A
Population above Partial LOAEL (night-time, LA <sub>eq</sub> , 8h)	307,200	-117,900
Population experiencing at least one event of N65 (daytime)	N/A	N/A
Population experiencing at least one event of N60 (night-time)	564,900	-616,600

**Communities - Air Quality**

As there is no change to track distribution below 1000ft, there is no effect on Air Quality from this option.

**Wider Society – Greenhouse Gas Impact**

Metric	Difference to Baseline
Track Miles of the routes used (nm)	+12

**Wider Society – Tranquillity & Biodiversity**

Metric	Option Value	Difference to Baseline
Total Area of AONBs/National Parks (NPs) overflown between 0-7000ft once a day on average (night-time)	0km <sup>2</sup>	No change
Total Area of AONBs/NPs overflown experiencing at least one event of N60 on average (night-time)	0km <sup>2</sup>	No change
Total Area of Richmond Park overflown between 0-7000ft at least once a day on average (night-time)	0km <sup>2</sup>	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-1640ft which observe a potential change in location overflown	0	No change
Number of sites (RAMSAR, SAC, SPA, SSSI) overflown between 0-3000ft which observe a potential change in location overflown	0	No change

**Wider Society – Capacity/Resilience**

Arrival throughput not of concern 0430-0600. A single or multiple PBN route could handle the low number of arrivals in this period if required.

There is no distinguishing difference between any option regards arrival throughput. Any aircraft not RNP-AR equipped would have another PBN route to rely on.

Heathrow's capacity for this ACP is limited by the existing 480,000 movement cap.

**General Aviation – Access**

No additional CAS required.

Option would not facilitate the release of CAS.

Option may impact existing helicopter routes, further work is required to understand if there is an impact on route H10.



## General Aviation / Commercial Airlines – Economic impact from increased effective capacity

No economic effect expected on GA operations.

Arrival delay is not an issue during the 0430-0600 period. Use of PBN arrivals during this time would be for noise mitigation purposes only. PBN arrivals in this time will not affect delay performance. There is no distinguishing difference between any option regards arrival delay.

## General Aviation / Commercial Airlines – Fuel Burn

Change in Fuel Burn (compared to the Baseline - annual - tonnes)

Not able to quantify at this time, owing to uncertainty in new stack locations

## Commercial Airlines – Training costs

This option would require RNP-AR capability and approvals. This can come with significant costs for airlines, however, it is unknown at this time whether RNP-AR route options would be progressed in isolation i.e. without other arrival procedures being available. Should an RNP-AR arrival be mandatory, there may be additional costs for some operators. This will be quantified in Stage 3.

## Commercial Airlines – Other costs

None identified.

## Airport/Air Navigation Service Provider (ANSP) – Infrastructure costs

Option may require re-location and/or addition of Noise Monitoring Terminals.

## Airport/ANSP – Operational costs

This option is not anticipated to change airport nor ANSP operational costs. Heathrow will continue to require ILS and other ground based infrastructure even with the implementation of PBN arrival procedures.

Option may lead to a change in the number of properties eligible for the noise insulation scheme) which could lead to a change in operational costs for the airport.

## Airport/ANSP – Deployment costs

There will be considerable costs associated with deployment in terms of operational training and system upgrades which will be quantified in Stage 3. However, there is not expected to be any differences in these costs between the different options.

## Safety

There are no IFP design issues identified with this option however, there are no RNP-AR arrivals published in the UK at this time. Therefore additional considerations may arise through the regulatory approval process.

Although new or revised safety assurances may be needed, an acceptable safety argument is envisaged to be achievable.

## Adherence to AMS

Supports the AMS through increased systemisation and meeting the Governments key environmental objectives by utilising PBN. The use of PBN arrivals has been appraised at this stage during periods where the landing rate is less critical. PBN arrivals in a system design might enable simplification, safety, efficiency and resilience enhancements and/or provide respite opportunities.

## Interdependencies, Conflicts & Trade-Offs

Option may result in conflicts/interdependencies with Luton's options.

## Outcome of PBN Arrival RWY27R Option X

Option X significantly reduces the population experiencing at least one N60 (night) noise event and decreases the population above the Partial LOAEL (night) when compared with the Baseline. It indicates no overflight of AONBs, NPs or Richmond Park and that no biodiversity sites between 0-3000ft should experience a change in location overflow.

The option indicates a significant increase in track miles. This option will be explored further in Stage 3.

**OPTION CARRIED FORWARD TO STAGE 3**

### PBN Arrivals – RWY 27R Option X (Night)



23:00 - 07:00

#### Overflight

Rate	Population Overflown		Overflight (0-7000 ft) contour map
	Baseline	Option X	
≥ 1	673,300	338,600	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

#### Aircraft Noise Events

Rate	Population experiencing noise events above N60 each day		N60 events contour map
	Baseline	Option X	
≥ 1	1,181,500	564,900	
≥ 5	0	0	
≥ 10	0	0	
≥ 20	0	0	
≥ 50	0	0	
≥ 100	0	0	
≥ 200	0	0	

#### Noise Exposures

Population count	Baseline	Option X	Partial LOAEL contour map
Estimated total population above 40 dB $L_{Aeq,1.5h}$	1,214,800	564,400	
Total population within Partial LOAEL (>45 dB $L_{Aeq,1.5h}$ )	425,100	307,200	

#### Noise Exposure Change

Change in Noise Exposure	Population experiencing at least 1 dB reduction within partial LOAEL or brought out of partial LOAEL	Population experiencing no change in noise exposure within partial LOAEL	Population experiencing at least 1 dB increase within partial LOAEL or brought into partial LOAEL	Change in noise exposure map
Partial LOAEL	113,200 (of which 96,800 brought out of Partial LOAEL by Option)	80,400	210,400 (of which 126,800 brought into Partial LOAEL by Option)	

